

NAComatic

Effective: 23-Sep-2010

Expires: 18-Nov-2010



Warranty

I make absolutely no warranty nor guarantee whatsoever about the accuracy, availability, applicability and/or correctness of any of the information in this document.

The official, original NACO documents are available for your downloading pleasure from: <http://naco.faa.gov/index.asp?xml=naco/onlineproducts>

Copyright

This compilation is protected by US copyright laws and international copyright treaties.

Limitations

The sale, hosting and/or distribution of this document in any and all forms, is prohibited.

Release from Liability

All users of this compilation must agree to be legally bound hereby, that Douglas R. Ranz ("Released Party") SHALL NOT BE LIABLE FOR MY DEATH OR INJURY TO MY PERSON, OR FOR ANY LOSS FOR DAMAGE TO MY PROPERTY OR REPUTATION caused in any manner whatsoever, whether attributable to the negligence of the Released Party, or for any other reason, occurring during the time that I am operating an aircraft.

I do hereby waive any right of action against the Released Party from any and all causes or claims that I may have against them from the beginning of time. I further agree not to sue on any such cause or claim. This agreement shall not release liability for gross negligence or willful misconduct of the Released Party. I agree to indemnify and hold the Released Party harmless for any losses, judgments, damages or fees he may incur, including but not limited to attorneys fees, arising out any lawsuit related to the planning, flight and/or enforcement of or legal challenge to this agreement. It is my intention that this agreement be interpreted and enforced to the maximum extent allowed by Michigan law.

03B =>	56	IRK =>	51
03D =>	57	JEF =>	46
19T =>	64	JLN =>	47
1H3 =>	54	LBO =>	52
1MO =>	61	LLU =>	52
2MO =>	62	LRY =>	44
34M =>	33	LXT =>	53
37M =>	45	MAW =>	55
3DW =>	79	MBY =>	58
3EX =>	39	MCI =>	50
3GV =>	43	MHL =>	56
3MO =>	64	MKC =>	49
3SQ =>	69	MNF =>	61
3VS =>	83	MYJ =>	58
42M =>	82	NVD =>	63
4MO =>	59	PLK =>	66
5MO =>	66	POF =>	67
63M =>	45	PYN =>	66
75K =>	27	RAW =>	84
75U =>	84	RCM =>	83
78Y =>	57	SET =>	70
7MO =>	67	SGF =>	80
87K =>	38	SIK =>	78
8WC =>	67	STJ =>	71
94K =>	34	STL =>	72
AIZ =>	48	SUS =>	74
ALN =>	75	SZL =>	86
AOV =>	27	TBN =>	41
BBG =>	29	TKX =>	51
BUM =>	31	TRX =>	82
CGI =>	33	TVB =>	31
CHQ =>	35	UBX =>	37
CHT =>	35	UNO =>	85
COU =>	36	UUV =>	81
CPS =>	76	VER =>	28
DMO =>	77	VIH =>	69
DXE =>	37		
EIW =>	63		
EOS =>	62		
EVU =>	57		
EZZ =>	32		
FAM =>	39		
FES =>	40		
FTT =>	42		
FWB =>	29		
FYG =>	84		
GLY =>	36		
GPH =>	60		
HAE =>	44		
HFJ =>	59		
HIG =>	45		

GENERAL INFORMATION

This Airport/Facility Directory is a Civil Flight Information Publication published and distributed every eight weeks by the FAA Department of Transportation, National Aeronautical Navigation Services, Silver Spring, Maryland 20910. It is designed for use with Aeronautical Charts covering the conterminous United States, Puerto Rico and the Virgin Islands.

This directory contains all open to the public airports, seaplane bases and heliports, military facilities, and selected private use facilities specifically requested by the Department of Defense (DoD) for which a DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures Publication. Additionally, this directory contains communications data, navigational facilities and certain special notices and procedures.

Military data contained within this publication is provided by the National Geospatial-Intelligence Agency and is intended to provide reference data for military and/or joint civil/military airports. Not all military data contained in this publication is applicable to civil users.

CORRECTIONS, COMMENTS, AND/OR PROCUREMENT

CRITICAL information such as equipment malfunction, abnormal field conditions, hazards to flight, etc., should be reported as soon as possible to the nearest FAA facility, either in person or by reverse charge telephone call.

FOR AIRPORT SUPPLEMENT REVISIONS FORM VISIT WEB SITE: <http://nfdc.faa.gov/portal/airportchanges.do>

FAA, Aeronautical Information Services, ATO-R, Rm. 626
800 Independence Ave., SW
Washington, DC 20591
Telephone 1-866-295-8236
Fax 202-267-5322
Email 9-ATOR-HQ-AIS-AIRPORTCHANGES@FAA.GOV

NOTICE: Changes must be received by the Aeronautical Information Services as soon as possible but not later than the "cut-off" dates listed below to assure publication on the desired effective date.

Effective Date	Airport Information	Airspace Information*
	Cut-off date	Cut-off date
23 Sep 10	11 Aug 10	22 Jul 10
18 Nov 10	6 Oct 10	16 Sep 10
13 Jan 11	1 Dec 10	11 Nov 10
10 Mar 11	26 Jan 11	6 Jan 11
5 May 11	23 Mar 11	3 Mar 11
30 Jun 11	18 May 11	28 Apr 11

*Including changes to preferred routes and graphic depictions on charts.

FOR CHARTING ERRORS CONTACT:

FAA, National Aeronautical Navigation Services
SSMC-4 Sta. #4435
1305 East West Highway
Silver Spring, MD 20910-3281
Telephone 1-800-626-3677
Email 9-AMC-Aerochart@faa.gov

Frequently asked questions (FAQs) are answered on our website at <http://aeronav.faa.gov>.
See the FAQs prior to contact via toll free number.

FOR PROCUREMENT CONTACT:

FAA, National Aeronautical Navigation Services
REDIS/Distribution Team
10201 Good Luck Road
Glenn Dale, MD 20769-9700
Online at <http://aeronav.faa.gov>
Email 9-AMC-Chartsales@faa.gov
Telephone 1-800-638-8972
Fax 301-436-6829
or any authorized chart agent.

New or Changed Information—To alert users of new information or changes to information from the previous issue, a vertical line will be portrayed in the outside margin and extending the full length of the new and/or revised data. This will not apply to the front cover or the airport/facility directory listing.

This Airport/Facility Directory comprises part of the following sections of the United States Aeronautical Information Publication (AIP): GEN, ENR and AD.

GENERAL INFORMATION

TABLE OF CONTENTS

General Information.....	Inside F
Abbreviations	2
Directory Legend	4
Airport/Facility Directory	
Iowa	22
Kansas	71
Minnesota.....	126
Missouri	189
Nebraska	251
North Dakota.....	287
South Dakota	322
City/Military Airport Cross Reference	348
Seaplane Landing Areas	349
Special Notices.....	350
Regulatory Notices	356
FAA and National Weather Service	
Telephone Numbers	357
Key to Aviation Weather Reports	358
Air Traffic Facilities Telephone Numbers	360
Air Route Traffic Control Centers	362
Flight Service Station Communication Frequencies	364
Flight Standards District Offices.....	368
Routes/Waypoints	
Low Altitude Directional Routes	369
High Altitude Preferred Routes.....	370
High Altitude Directional Routes	373
Q-Routes.....	374
RNAV Routing Pitch and Catch Points	377
VFR Waypoints.....	388
VOR Receiver Check	396
Parachute Jumping Areas	401
Aeronautical Chart Bulletins	404
Supplemental Communication Reference	412
Airport Diagrams	418
National Weather Service (NWS) Upper Air Observing Stations	496
Enroute Flight Advisory Service (EFAS)	Inside B

ABBREVIATIONS

The following abbreviations/acronyms are those commonly used within this Directory. Other abbreviations/acronyms may be found in the Legend and are not duplicated below. The abbreviations presented are intended to represent grammatical variations of the basic form. (Example—"req" may mean "request", "requesting", "requested", or "requests").

AAF	Army Air Field	byd	beyond
AB	Airbase	C	Commercial Circuit (Telephone)
abv	above	CGAF	Coast Guard Air Facility
ACC	Air Combat Command; Area Control Center	CGAS	Coast Guard Air Station
acft	aircraft	CIV	Civil
ADCC	Air Defense Control Center	clsd	closed
AER	approach end rwy	comd	command
AFB	Air Force Base	CONUS	Continental United States
AFHP	Air Force Heliport	CSTMS	Customs
afld	airfield	ctc	contact
AFOD	US Army Flight Operations Detachment	ctl	control
AFRC	Armed Forces Reserve Center/Air Force Reserve Command	dalgt	daylight
AFSS	Automated Flight Service Station	Dec	December
AG	Agriculture	DIAP	DoD Instrument Approach Procedure
A-GEAR	Arresting Gear	DoD	Department of Defense
AGL	above ground level	DSN	Defense Switching Network (Telephone)
AHP	Army heliport	dsplcd	displaced
ALS	Approach Light System	durn	duration
alt	altitude	eff	effective
AMC	Air Mobility Command	emerg	emergency
ANGS	Air National Guard Station	EOR	End of Runway
apch	approach	ETA	Estimated Time of Arrival
Apr	April	ETD	Estimated Time of Departure
APU	Auxiliary Power Unit	exc	except
ARB	Air Reserve Base	extd	extend
arpt	airport	FBO	fixed-base operator
ARS	Air Reserve Station	Feb	February
AS	Air Station	fld	field
ASDE-X	Airport Surface Detection Equipment—Model X	FLIP	Flight Information Publication
ASU	Aircraft Starting Unit	flt	flight
ATC	Air Traffic Control	flw	follow
ATCT	Airport Traffic Control Tower	Fri	Friday
Aug	August	FSS	Flight Service Station
AUW	All Up Weight (gross weight)	GA	glide angle
avbl	available	GCA	Ground Controlled Approach
bcn	beacon	GS	glide slope
blo	below	haz	hazard
		HQ	Headquarters

CONTINUED ON NEXT PAGE

GENERAL INFORMATION

3

CONTINUED FROM PRECEDING PAGE

hr	hour	npi	non precision instrument
IAP	Instrument Approach Procedure	NS ABTMT	Noise Abatement
ICAO	International Civil Aviation Organization	NSTD	nonstandard
IFR	Instrument Flight Rules	ntc	notice
ILS	Instrument Landing System	obsn	observation
IM	Inner Marker	Oct	October
IMG	Immigration	OLF	Outlying Field
incr	increase	opr	operate, operator, operational
indef	indefinite	ops	operations
ints	intensity	OTS	out of service
invo	in the vicinity of	ovrn	overrun
IMC	Instrument Meteorological Conditions	PAEW	personnel and equipment working
Jan	January	pat	pattern
JASU	Jet Aircraft Starting Unit	p-line	power line
JOAP	Joint Oil Analysis Program	PMSV	Pilot-to-Metro Service
JOSAC	Joint Operational Support Airlift Center	POL	Petrol, Oils and Lubricants
JRB	Joint Reserve Base	PPR	prior permission required
Jul	July	PRM	Precision Runway Monitoring
Jun	June	PTD	Pilot to Dispatcher
Kt	Knots	RAMCC	Regional Air Movement Control Center
LAA	Local Airport Advisory	req	request
LAHSO	Land and Hold Short Operations	rgt tfc	right traffic
lbs	pounds	RON	Remain Overnight
ldg	landing	rqr	require
Igtd	lighted	rstd	restricted
Igts	lights	RSRS	reduced same runway separation
LMM	Compass locator at Middle Marker ILS	rwy	runway
LOC	Localizer	Sat	Saturday
LOM	Compass locator at Outer Marker ILS	SELF	Strategic Expeditionary Landing Field
ltd	limited	Sep	September
MACC	Military Area Control Center	SFA	Single Frequency Approach
Mar	March	sfc	surface
MCAF	Marine Corps Air Facility	SFRA	Special Flight Rules Area
MCALF	Marine Corps Auxiliary Landing Field	SOAP	Spectrometric Oil Analysis Program
MCAS	Marine Corps Air Station	SOF	Supervisor of Flying
MCB	Marine Corps Base	SPB	Seaplane Base
med	medium	SR	sunrise
METRO	Pilot-to-Metro voice call	SS	sunset
Mil	military	std	standard
min	minute	Sun	Sunday
MLS	Microwave Landing System	svc	service
MM	Middle Marker of ILS	tfc	traffic
Mon	Monday	thld	threshold
MP	Maintenance Period	Thu	Thursday
MSL	mean sea level	tkf	take-off
MSAW	minimum safe altitude warning	tmpry	temporary
NAAS	Naval Auxiliary Air Station	tran	transient
NADC	Naval Air Development Center	Tue	Tuesday
NADEP	Naval Air Depot	twr	tower
NAEC	Naval Air Engineering Center	twy	taxiway
NAES	Naval Air Engineering Station	UC	Under Construction
NAF	Naval Air Facility	USA	United States Army
NALCO	Naval Air Logistics Control Office	USAF	United States Air Force
NALO	Navy Air Logistics Office	USCG	United States Coast Guard
NALF	Naval Auxiliary Landing Field	USN	United States Navy
NAS	Naval Air Station	V	Defense Switching Network (telephone, formerly AUTOVON)
NAWC	Naval Air Warfare Center	VFR	Visual Flight Rules
NAWS	Naval Air Weapons Station	VIP	Very Important Person
ngt	night	VMC	Visual Meteorological Conditions
NOLF	Naval Outlying Field	Wed	Wednesday
Nov	November	wx	weather

SAMPLE


①
CITY NAME
 ②
AIRPORT NAME (ALTERNATE NAME) (LTS) (KLTS) CIV/MIL 3 N UTC-6(-5DT) N34°41.93' W99°20.20' JACKSONVILLE
 200 B S4 FUEL 100 OX 1 TPA-1000(800) AOE Class IV, ARFF Index A NOTAM FILE ORL Not insp. COPTER
 ③ ④ ⑤ ⑥ ⑦ ⑧
 ⑨
 ⑩
 ⑪
 ⑫
 ⑬
 ⑭
 ⑮
 ⑯
 ⑰
 ⑱
 ⑲
 ⑳
 ㉑
 RWY 18-36: H12004X200 (ASPH-CONC-GRVD)
 S-90, D-160, 2D-300 PCN 80 R/B/W/T HIRL CL
 RWY 18: LDIN: MALSF. TDZL. REIL. PAPI(P2R)—GA 3.0° TCH 36'.
 Thld dsplcd 300'. Trees. Rgt tfe. 0.3% up.
 RWY 36: ALSF1. 0.4% down.
 RWY 09-27: H6000X150 (ASPH) MIRL
 RWY 173-353: H3515X150 (ASPH-PFC) AUW PCN 59 F/A/W/T
LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 18	09-27	6500
RWY 36	09-27	5400

RUNWAY DECLARED DISTANCE INFORMATION
 RWY 18: TORA-12004 TODA-12704 ASDA-11704 LDA-11504
 RWY 36: TORA-12004 TODA-12004 ASDA-12004 LDA-11704
 ㉒
ARRESTING GEAR/SYSTEM
 RWY 18 → HOOK E5 (65' OVRN) BAK-14 BAK-12B (1650')
 BAK-14 BAK-12 (B) (1087') HOOK E5 (74' OVRN) ← RWY 36
 ㉓
MILITARY SERVICE: A-GEAR E-5 connected on dep end, disconnected on
 apch end. JASU 3(AM32A-60) 2(A/M32A-86)
 ㉔
 ㉕ → FUEL J8(Mil) (NC-100, A) FLUID W SP PRESAIR LOX ← ㉖
 OIL O-128 TRAN ALERT Avbl 1300-0200Z†, svc limited weekends.
 ㉗ ㉘
 ㉙ → **AIRPORT REMARKS:** Special Air Traffic Rules—Part 93, see Regulatory Notices. Attended 1200-0300Z†. Parachute
 Jumping. Deer invov arpt. Heavy jumbo jet training surface to 9000'. Twy A clsd indef. Flight Notification Service
 (ADCUS) avbl.
 ㉚ → **MILITARY REMARKS:** ANG PPR/Official Business Only. Base OPS DSN 638-4390, C503-335-4222. Ctc Base OPS 15
 minutes prior to ldg and after dep. Limited tran parking.
 ㉛ → **WEATHER DATA SOURCES:** AWOS-1 120.3 (202) 426-8000. LLWAS.
 ㉜ → **COMMUNICATIONS:** SFA ATIS 127.25 273.5 (202) 426-8003 UNICOM 122.95 PTD 372.2
 NAME FSS (ORL) on arpt. 123.65 122.65 122.2
 NAME RCO 112.2T 112.1R (NAME RADIO)
 ㉝ **NAME APP/DEP CON** 128.35 257.725 (1200-0400Z†)
TOWER 119.65 255.6 (1200-0400Z†) **GND CON** 121.7 **GCO** 135.075 (ORLANDO CLNC) **CLNC DEL** 125.55
 NAME COMD POST (GERONIMO) 311.0 321.4 6761 **PMSV METRO** 239.8 **NAME OPS** 257.5
 ㉞ → **AIRSPACE:** CLASS B See VFR Terminal Area Chart.
 ㉟ → **RADIO AIDS TO NAVIGATION:** NOTAM FILE ORL. VHF/DF etc FSS.
 (H) VORTAC 112.2 MCO Chan 59 N28°32.55' W81°20.12' at fld. 1110/8E.
 (H) TACAN Chan 29 CBU (109.2) N28°32.65' W81°21.12' at fld. 1115/8E.
 HERNY NDB (LOM) 221 OR N28°37.40' W81°21.05' 177° 5.4 NM to fld.
 ILS/DME 108.5 I-ORL Chan 22 Rwy 18. Class IIE. LOM HERNY NDB.
 ASR/PAR (1200-0400Z†)
 ㊱ → **COMM/NAV/WEATHER REMARKS:** Emerg frequency 121.5 not avbl at twr.

 HELIPAD H1: H100X75 (ASPH)
 HELIPAD H2: H60X60 (ASPH)
 HELIPORT REMARKS: Helipad H1 lctd on general aviation side and H2 lctd on air carrier side of arpt.

 187 TPA 1000(813)
 WATERWAY 15-33: 5000X425 (WATER)
 SEAPLANE REMARKS: Birds roosting and feeding areas along river banks. Seaplanes operating adjacent to SW side of
 arpt not visible from twr and are required to ctc twr.

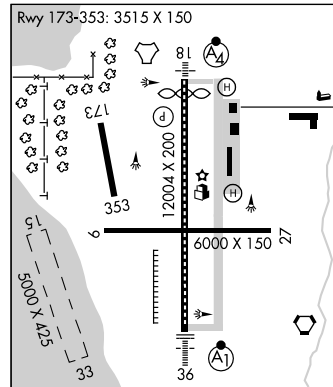

All bearings and radials are magnetic unless otherwise specified.
 All mileages are nautical unless otherwise noted.
 All times are Coordinated Universal Time (UTC) except as noted.
 All elevations are in feet above/below Mean Sea Level (MSL) unless otherwise noted.
 The horizontal reference datum of this publication is North American Datum of 1983 (NAD83), which for charting purposes
 is considered equivalent to World Geodetic System 1984 (WGS 84).

10

SKETCH LEGEND

RUNWAYS/LANDING AREAS

Hard Surfaced	
Metal Surface	
Sod, Gravel, etc.	
Light Plane,	
Ski Landing Area or Water	
Under Construction	
Closed	
Helicopter Landings Area	
Displaced Threshold	
Taxiway, Apron and Stopways . .	

MISCELLANEOUS BASE AND CULTURAL FEATURES

Buildings	
Power Lines	
Fence	
Towers	
Tanks	
Oil Well	
Smoke Stack	
Obstruction	
Controlling Obstruction	
Trees	
Populated Places	
Cuts and Fills	
Cliffs and Depressions	
Ditch	
Hill	

RADIO AIDS TO NAVIGATION

VORTAC		VOR	
VOR/DME		NDB	
TACAN		NDB/DME	

MISCELLANEOUS AERONAUTICAL FEATURES

Airport Beacon	
Wind Cone	
Landing Tee	
Tetrahedron	
Control Tower	

APPROACH LIGHTING SYSTEMS

A dot "•" portrayed with approach lighting letter identifier indicates sequenced flashing lights (F) installed with the approach lighting system e.g., (A1) Negative symbology, e.g., (A1) indicates Pilot Controlled Lighting (PCL).

Runway Centerline Lighting	
(A) Approach Lighting System ALSF-2 . .	
(A1) Approach Lighting System ALSF-1 . .	
(A2) Short Approach Lighting System SALS/SALSF	
(A3) Simplified Short Approach Lighting System (SSALR) with RAIL	
(A4) Medium Intensity Approach Lighting System (MALS and MALSF)/(SSALS and SSALF)	
(A5) Medium Intensity Approach Lighting System (MALSR) and RAIL	
(Y) Omnidirectional Approach Lighting System (ODALS)	
(D) Navy Parallel Row and Cross Bar . .	
(F) Air Force Overrun	
(V) Visual Approach Slope Indicator with Standard Threshold Clearance provided	
(V2) Pulsating Visual Approach Slope Indicator (PVASI)	
(V3) Visual Approach Slope Indicator with a threshold crossing height to accommodate long bodied or jumbo aircraft	
(V4) Tri-color Visual Approach Slope Indicator (TRCV)	
(V5) Approach Path Alignment Panel (APAP)	
(P) Precision Approach Path Indicator (PAPI)	

LEGEND

This directory is a listing of data on record with the FAA on all open to the public airports, military facilities and selected private use facilities specifically requested by the Department of Defense (DoD) for which a DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures Publication. Additionally this listing contains data for associated terminal control facilities, air route traffic control centers, and radio aids to navigation within the conterminous United States, Puerto Rico and the Virgin Islands. Joint civil/military and civil airports are listed alphabetically by state, associated city and airport name and cross-referenced by airport name. Military facilities are listed alphabetically by state and official airport name and cross-referenced by associated city name. Navajids, flight service stations and remote communication outlets that are associated with an airport, but with a different name, are listed alphabetically under their own name, as well as under the airport with which they are associated.

The listing of an open to the public airport in this directory merely indicates the airport operator's willingness to accommodate transient aircraft, and does not represent that the facility conforms with any Federal or local standards, or that it has been approved for use on the part of the general public. Military and private use facilities published in this directory are open to civil pilots only in an emergency or with prior permission. See Special Notice Section, Civil Use of Military Fields.

The information on obstructions is taken from reports submitted to the FAA. Obstruction data has not been verified in all cases. Pilots are cautioned that objects not indicated in this tabulation (or on the airports sketches and/or charts) may exist which can create a hazard to flight operation. Detailed specifics concerning services and facilities tabulated within this directory are contained in the Aeronautical Information Manual, Basic Flight Information and ATC Procedures.

The legend items that follow explain in detail the contents of this Directory and are keyed to the circled numbers on the sample on the preceding pages.

① CITY/AIRPORT NAME

Civil and joint civil/military airports and facilities in this directory are listed alphabetically by state and associated city. Where the city name is different from the airport name the city name will appear on the line above the airport name. Airports with the same associated city name will be listed alphabetically by airport name and will be separated by a dashed rule line. A solid rule line will separate all others. FAA approved helipads and seaplane landing areas associated with a land airport will be separated by a dotted line. Military airports are listed alphabetically by state and official airport name.

② ALTERNATE NAME

Alternate names, if any, will be shown in parentheses.

③ LOCATION IDENTIFIER

The location identifier is a three or four character FAA code followed by a four-character ICAO code assigned to airports. ICAO codes will only be published at joint civil/military, and military facilities. If two different military codes are assigned, both codes will be shown with the primary operating agency's code listed first. These identifiers are used by ATC in lieu of the airport name in flight plans, flight strips and other written records and computer operations. Zeros will appear with a slash to differentiate them from the letter "O".

④ OPERATING AGENCY

Airports within this directory are classified into two categories, Military/Federal Government and Civil airports open to the general public, plus selected private use airports. The operating agency is shown for military, private use and joint civil/military airports. The operating agency is shown by an abbreviation as listed below. When an organization is a tenant, the abbreviation is enclosed in parenthesis. No classification indicates the airport is open to the general public with no military tenant.

A	US Army	MC	Marine Corps
AFRC	Air Force Reserve Command	N	Navy
AF	US Air Force	NAF	Naval Air Facility
ANG	Air National Guard	NAS	Naval Air Station
AR	US Army Reserve	NASA	National Air and Space Administration
ARNG	US Army National Guard	P	US Civil Airport Wherein Permit Covers
CG	US Coast Guard		Use by Transient Military Aircraft
CIV/MIL	Joint Use Civil/Military	PVT	Private Use Only (Closed to the Public)
DND	Department of National Defense Canada		

⑤ AIRPORT LOCATION

Airport location is expressed as distance and direction from the center of the associated city in nautical miles and cardinal points, e.g., 4 NE.

⑥ TIME CONVERSION

Hours of operation of all facilities are expressed in Coordinated Universal Time (UTC) and shown as "Z" time. The directory indicates the number of hours to be subtracted from UTC to obtain local standard time and local daylight saving time UTC-5(-4DT). The symbol ‡ indicates that during periods of Daylight Saving Time effective hours will be one hour earlier than shown. In those areas where daylight saving time is not observed the (-4DT) and ‡ will not be shown. Daylight saving time is in effect from 0200 local time the second Sunday in March to 0200 local time the first Sunday in November. Canada and all U.S. Conterminous States observe daylight saving time except Arizona and Puerto Rico, and the Virgin Islands. If the state observes daylight saving time and the operating times are other than daylight saving times, the operating hours will include the dates, times and no ‡ symbol will be shown, i.e., April 15-Aug 31 0630-1700Z, Sep 1-Apr 14 0600-1700Z.

⑦ GEOGRAPHIC POSITION OF AIRPORT—AIRPORT REFERENCE POINT (ARP)

Positions are shown as hemisphere, degrees, minutes and hundredths of a minute and represent the approximate geometric center of all usable runway surfaces.

⑧ CHARTS

Charts refer to the Sectional Chart and Low and High Altitude Enroute Chart and panel on which the airport or facility is located. Helicopter Chart locations will be indicated as COPTER. IFR Gulf of Mexico West and IFR Gulf of Mexico Central will be depicted as GOMW and GOMC.

⑨ INSTRUMENT APPROACH PROCEDURES, AIRPORT DIAGRAM

IAP indicates an airport for which a prescribed (Public Use) FAA Instrument Approach Procedure has been published. DIAP indicates an airport for which a prescribed DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures. See the Special Notice Section of this directory, Civil Use of Military Fields and the Aeronautical Information Manual 5-4-5 Instrument Approach Procedure Charts for additional information. AD indicates an airport for which an airport diagram has been published. Airport diagrams are located in the back of each A/FD volume alphabetically by associated city and airport name.

⑩ AIRPORT SKETCH

The airport sketch, when provided, depicts the airport and related topographical information as seen from the air and should be used in conjunction with the text. It is intended as a guide for pilots in VFR conditions. Symbology that is not self-explanatory will be reflected in the sketch legend. The airport sketch will be oriented with True North at the top. Airport sketches will be added incrementally.

⑪ ELEVATION

The highest point of an airport's usable runways measured in feet from mean sea level. When elevation is sea level it will be indicated as "00". When elevation is below sea level a minus "-" sign will precede the figure.

⑫ ROTATING LIGHT BEACON

B indicates rotating beacon is available. Rotating beacons operate sunset to sunrise unless otherwise indicated in the AIRPORT REMARKS or MILITARY REMARKS segment of the airport entry.

⑬ SERVICING—CIVIL

S1: Minor airframe repairs.	S5: Major airframe repairs.
S2: Minor airframe and minor powerplant repairs.	S6: Minor airframe and major powerplant repairs.
S3: Major airframe and minor powerplant repairs.	S7: Major powerplant repairs.
S4: Major airframe and major powerplant repairs.	S8: Minor powerplant repairs.

⑭ FUEL

CODE	FUEL	CODE	FUEL
80	Grade 80 gasoline (Red)	B+	Jet B, Wide-cut, turbine fuel with FS-II*, FP** minus 50° C.
100	Grade 100 gasoline (Green)	J4 (JP4)	(JP-4 military specification) FP** minus 58° C.
100LL	100LL gasoline (low lead) (Blue)	J5 (JP5)	(JP-5 military specification) Kerosene with FS-11, FP** minus 46° C.
115	Grade 115 gasoline (115/145 military specification) (Purple)	J8 (JP8)	(JP-8 military specification) Jet A-1, Kerosene with FS-II*, FP** minus 47° C.
A	Jet A, Kerosene, without FS-II*, FP** minus 40° C.	J8+100	(JP-8 military specification) Jet A-1, Kerosene with FS-II*, FP** minus 47° C, with-fuel additive package that improves thermo stability characteristics of JP-8.
A+	Jet A, Kerosene, with FS-II*, FP** minus 40° C.	J	(Jet Fuel Type Unknown)
A1	Jet A-1, Kerosene, without FS-II*, FP** minus 47° C.	MOGAS	Automobile gasoline which is to be used as aircraft fuel.
A1+	Jet A-1, Kerosene with FS-II*, FP** minus 47° C.		
B	Jet B, Wide-cut, turbine fuel without FS-II*, FP** minus 50° C.		

*(Fuel System Icing Inhibitor)

** (Freeze Point)

NOTE: Certain automobile gasoline may be used in specific aircraft engines if a FAA supplemental type certificate has been obtained. Automobile gasoline, which is to be used in aircraft engines, will be identified as "MOGAS", however, the grade/type and other octane rating will not be published.

Data shown on fuel availability represents the most recent information the publisher has been able to acquire. Because of a variety of factors, the fuel listed may not always be obtainable by transient civil pilots. Confirmation of availability of fuel should be made directly with fuel suppliers at locations where refueling is planned.

⑮ OXYGEN—CIVIL

OX 1 High Pressure	OX 3 High Pressure—Replacement Bottles
OX 2 Low Pressure	OX 4 Low Pressure—Replacement Bottles

⑯ TRAFFIC PATTERN ALTITUDE

Traffic Pattern Altitude (TPA)—The first figure shown is TPA above mean sea level. The second figure in parentheses is TPA above airport elevation. Multiple TPA shall be shown as "TPA—See Remarks" and detailed information shall be shown in the Airport or Military Remarks Section. Traffic pattern data for USAF bases, USN facilities, and U.S. Army airports (including those on which ACC or U.S. Army is a tenant) that deviate from standard pattern altitudes shall be shown in Military Remarks.

⑪ AIRPORT OF ENTRY, LANDING RIGHTS, AND CUSTOMS USER FEE AIRPORTS

U.S. CUSTOMS USER FEE AIRPORT—Private Aircraft operators are frequently required to pay the costs associated with customs processing.

AOE—Airport of Entry. A customs Airport of Entry where permission from U.S. Customs is not required to land. However, at least one hour advance notice of arrival is required.

LRA—Landing Rights Airport. Application for permission to land must be submitted in advance to U.S. Customs. At least one hour advance notice of arrival is required.

NOTE: Advance notice of arrival at both an AOE and LRA airport may be included in the flight plan when filed in Canada or Mexico. Where Flight Notification Service (ADCUS) is available the airport remark will indicate this service. This notice will also be treated as an application for permission to land in the case of an LRA. Although advance notice of arrival may be relayed to Customs through Mexico, Canada, and U.S. Communications facilities by flight plan, the aircraft operator is solely responsible for ensuring that Customs receives the notification. (See Customs, Immigration and Naturalization, Public Health and Agriculture Department requirements in the International Flight Information Manual for further details.)

US Customs Air and Sea Ports, Inspectors and Agents

Northeast Sector (New England and Atlantic States—ME to MD)

407-975-1740

Southeast Sector (Atlantic States—DC, WV, VA to FL)

407-975-1780

Central Sector (Interior of the US, including Gulf states—MS, AL, LA)

407-975-1760

Southwest East Sector (OK and eastern TX)

407-975-1840

Southwest West Sector (Western TX, NM and AZ)

407-975-1820

Pacific Sector (WA, OR, CA, HI and AK)

407-975-1800

⑫ CERTIFICATED AIRPORT (14 CFR PART 139)

Airports serving Department of Transportation certified carriers and certified under 14 CFR part 139 are indicated by the Class and the ARFF Index; e.g. Class I, ARFF Index A, which relates to the availability of crash, fire, rescue equipment. Class I airports can have an ARFF Index A through E, depending on the aircraft length and scheduled departures. Class II, III, and IV will always carry an Index A.

14 CFR PART 139 CERTIFICATED AIRPORTS AIRPORT CLASSIFICATIONS

Type of Air Carrier Operation	Class I	Class II	Class III	Class IV
Scheduled Air Carrier Aircraft with 31 or more passenger seats	X			
Unscheduled Air Carrier Aircraft with 31 or more passengers seats	X	X		X
Scheduled Air Carrier Aircraft with 10 to 30 passenger seats	X	X	X	

14 CFR—PART 139 CERTIFICATED AIRPORTS

INDICES AND AIRCRAFT RESCUE AND FIRE FIGHTING EQUIPMENT REQUIREMENTS

<i>Airport Index</i>	<i>Required No. Vehicles</i>	<i>Aircraft Length</i>	<i>Scheduled Departures</i>	<i>Agent + Water for Foam</i>
A	1	<90'	≥1	500#DC or HALON 1211 or 450#DC + 100 gal H ₂ O
B	1 or 2	≥90', <126' ----- ≥126', <159'	≥5 ----- <5	Index A + 1500 gal H ₂ O
C	2 or 3	≥126', <159' ----- ≥159', <200'	≥5 ----- <5	Index A + 3000 gal H ₂ O
D	3	≥159', <200' ----- >200'	<5	Index A + 4000 gal H ₂ O
E	3	≥200'	≥5	Index A + 6000 gal H ₂ O

> Greater Than; < Less Than; ≥ Equal or Greater Than; ≤ Equal or Less Than; H₂O—Water; DC—Dry Chemical.

NOTE: The listing of ARFF index does not necessarily assure coverage for non-air carrier operations or at other than prescribed times for air carrier. ARFF Index Ltd.—indicates ARFF coverage may or may not be available, for information contact airport manager prior to flight.

⑬ NOTAM SERVICE

All public use landing areas are provided NOTAM “D” (distant dissemination) and NOTAM “L” (local dissemination) service. Airport NOTAM file identifier is shown for individual airports, e.g. “NOTAM FILE IAD”. See AIM, Basic Flight Information and

ATC Procedures for detailed description of NOTAM's. Current NOTAMs are available from Flight Service Stations at 1-800-WX-BRIEF. Real time Military NOTAMs are available using the DoD Internet NOTAM Distribution System (DINS) www.notams.jcs.mil.

② FAA INSPECTION

All airports not inspected by FAA will be identified by the note: Not insp. This indicates that the airport information has been provided by the owner or operator of the field.

② RUNWAY DATA

Runway information is shown on two lines. That information common to the entire runway is shown on the first line while information concerning the runway ends is shown on the second or following line. Runway direction, surface, length, width, weight bearing capacity, lighting, and slope, when available are shown for each runway. Multiple runways are shown with the longest runway first. Direction, length, width, and lighting are shown for sea-lanes. The full dimensions of helipads are shown, e.g., 50X150. Runway data that requires clarification will be placed in the remarks section.

RUNWAY DESIGNATION

Runways are normally numbered in relation to their magnetic orientation rounded off to the nearest 10 degrees. Parallel runways can be designated L (left)/R (right)/C (center). Runways may be designated as Ultralight or assault strips. Assault strips are shown by magnetic bearing.

RUNWAY DIMENSIONS

Runway length and width are shown in feet. Length shown is runway end to end including displaced thresholds, but excluding those areas designed as overruns.

RUNWAY SURFACE AND LENGTH

Runway lengths prefixed by the letter "H" indicate that the runways are hard surfaced (concrete, asphalt, or part asphalt-concrete). If the runway length is not prefixed, the surface is sod, clay, etc. The runway surface composition is indicated in parentheses after runway length as follows:

(AFSC)—Aggregate friction seal coat	(GRVL)—Gravel, or cinders	(PSP)—Pierced steel plank
(ASPH)—Asphalt	(MATS)—Pierced steel planking,	(RFSC)—Rubberized friction seal coat
(CONC)—Concrete	landing mats, membranes	(TURF)—Turf
(DIRT)—Dirt	(PEM)—Part concrete, part asphalt	(TRTD)—Treated
(GRVD)—Grooved	(PFC)—Porous friction courses	(WC)—Wire combed

RUNWAY WEIGHT BEARING CAPACITY

Runway strength data shown in this publication is derived from available information and is a realistic estimate of capability at an average level of activity. It is not intended as a maximum allowable weight or as an operating limitation. Many airport pavements are capable of supporting limited operations with gross weights in excess of the published figures. Permissible operating weights, insofar as runway strengths are concerned, are a matter of agreement between the owner and user. When desiring to operate into any airport at weights in excess of those published in the publication, users should contact the airport management for permission. Runway strength figures are shown in thousand of pounds, with the last three figures being omitted. Add 000 to figure following S, D, 2S, 2T, AUW, SWL, etc., for gross weight capacity. A blank space following the letter designator is used to indicate the runway can sustain aircraft with this type landing gear, although definite runway weight bearing capacity figures are not available, e.g., S, D. Applicable codes for typical gear configurations with S=Single, D=Dual, T=Triple and Q=Quadruple:

CURRENT	NEW	NEW DESCRIPTION
S	S	Single wheel type landing gear (DC3), (C47), (F15), etc.
D	D	Dual wheel type landing gear (BE1900), (B737), (A319), etc.
T	D	Dual wheel type landing gear (P3, C9).
ST	2S	Two single wheels in tandem type landing gear (C130).
TRT	2T	Two triple wheels in tandem type landing gear (C17), etc.
DT	2D	Two dual wheels in tandem type landing gear (B707), etc.
TT	2D	Two dual wheels in tandem type landing gear (B757, KC135).
SBTT	2D/D1	Two dual wheels in tandem/dual wheel body gear type landing gear (KC10).
None	2D/2D1	Two dual wheels in tandem/two dual wheels in tandem body gear type landing gear (A340-600).
DDT	2D/2D2	Two dual wheels in tandem/two dual wheels in double tandem body gear type landing gear (B747, E4).
TTT	3D	Three dual wheels in tandem type landing gear (B777), etc.
TT	D2	Dual wheel gear two struts per side main gear type landing gear (B52).
TD	C5	Complex dual wheel and quadruple wheel combination landing gear (C5).

AUW—All up weight. Maximum weight bearing capacity for any aircraft irrespective of landing gear configuration.

SWL—Single Wheel Loading. (This includes information submitted in terms of Equivalent Single Wheel Loading (ESWL) and Single Isolated Wheel Loading).

PSI—Pounds per square inch. PSI is the actual figure expressing maximum pounds per square inch runway support, e.g., (SWL 000/PSI 535).

Omission of weight bearing capacity indicates information unknown.

The ACN/PCN System is the ICAO standard method of reporting pavement strength for pavements with bearing strengths greater than 12,500 pounds. The Pavement Classification Number (PCN) is established by an engineering assessment of the runway. The PCN is for use in conjunction with an Aircraft Classification Number (ACN). Consult the Aircraft Flight Manual, Flight Information Handbook, or other appropriate source for ACN tables or charts. Currently, ACN data may not be available for all aircraft. If an ACN table or chart is available, the ACN can be calculated by taking into account the aircraft weight, the pavement type, and the subgrade category. For runways that have been evaluated under the ACN/PCN system, the PCN will be shown as a five-part code (e.g. PCN 80 R/B/W/T). Details of the coded format are as follows:

- (1) The PCN NUMBER—The reported PCN indicates that an aircraft with an ACN equal or less than the reported PCN can operate on the pavement subject to any limitation on the tire pressure.
- (2) The type of pavement:
 - R — Rigid
 - F — Flexible
- (3) The pavement subgrade category:
 - A — High
 - B — Medium
 - C — Low
 - D — Ultra-low
- (4) The maximum tire pressure authorized for the pavement:
 - W — High, no limit
 - X — Medium, limited to 217 psi
 - Y — Low, limited to 145 psi
 - Z — Very low, limited to 73 psi
- (5) Pavement evaluation method:
 - T — Technical evaluation
 - U — By experience of aircraft using the pavement

NOTE: Prior permission from the airport controlling authority is required when the ACN of the aircraft exceeds the published PCN or aircraft tire pressure exceeds the published limits.

RUNWAY LIGHTING

Lights are in operation sunset to sunrise. Lighting available by prior arrangement only or operating part of the night and/or pilot controlled lighting with specific operating hours are indicated under airport or military remarks. At USN/USMC facilities lights are available only during airport hours of operation. Since obstructions are usually lighted, obstruction lighting is not included in this code. Unlighted obstructions on or surrounding an airport will be noted in airport or military remarks. Runway lights nonstandard (NSTD) are systems for which the light fixtures are not FAA approved L-800 series: color, intensity, or spacing does not meet FAA standards. Nonstandard runway lights, VASI, or any other system not listed below will be shown in airport remarks or military service. Temporary, emergency or limited runway edge lighting such as flares, smudge pots, lanterns or portable runway lights will also be shown in airport remarks or military service. Types of lighting are shown with the runway or runway end they serve.

NSTD—Light system fails to meet FAA standards.

LIRL—Low Intensity Runway Lights.

MIRL—Medium Intensity Runway Lights.

HIRL—High Intensity Runway Lights.

RAIL—Runway Alignment Indicator Lights.

REIL—Runway End Identifier Lights.

CL—Centerline Lights.

TDZL—Touchdown Zone Lights.

ODALS—Omni Directional Approach Lighting System.

AF OVRN—Air Force Overrun 1000' Standard Approach Lighting System.

LDIN—Lead-In Lighting System.

MALS—Medium Intensity Approach Lighting System.

MALSF—Medium Intensity Approach Lighting System with Sequenced Flashing Lights.

MALSR—Medium Intensity Approach Lighting System with Runway Alignment Indicator Lights.

NOTE: Civil ALSF2 may be operated as SALR during favorable weather conditions. When runway edge lights are positioned more than 10 feet from the edge of the usable runway surface a remark will be added in the "Remarks" portion of the airport entry. This is applicable to Air Force, Air National Guard and Air Force Reserve Bases, and those joint civil/military airfields on which they are tenants.

SALS—Short Approach Lighting System.

SALSF—Short Approach Lighting System with Sequenced Flashing Lights.

SSALS—Simplified Short Approach Lighting System.

SSALF—Simplified Short Approach Lighting System with Sequenced Flashing Lights.

SSALR—Simplified Short Approach Lighting System with Runway Alignment Indicator Lights.

ALSAF—High Intensity Approach Lighting System with Sequenced Flashing Lights.

ALSF1—High Intensity Approach Lighting System with Sequenced Flashing Lights, Category I, Configuration.

ALSF2—High Intensity Approach Lighting System with Sequenced Flashing Lights, Category II, Configuration.

SF—Sequenced Flashing Lights.

OLS—Optical Landing System.

WAVE—OFF.

VISUAL GLIDESLOPE INDICATORS

APAP—A system of panels, which may or may not be lighted, used for alignment of approach path.

PNIL	APAP on left side of runway	PNIR	APAP on right side of runway
PAPI—Precision Approach Path Indicator			
P2L	2-identical light units placed on left side of runway	P4L	4-identical light units placed on left side of runway
P2R	2-identical light units placed on right side of runway	P4R	4-identical light units placed on right side of runway
PVASI—Pulsating/steady burning visual approach slope indicator, normally a single light unit projecting two colors.			
PSIL	PVASI on left side of runway	PSIR	PVASI on right side of runway
SAVASI—Simplified Abbreviated Visual Approach Slope Indicator			
S2L	2-box SAVASI on left side of runway	S2R	2-box SAVASI on right side of runway

TRCV—Tri-color visual approach slope indicator, normally a single light unit projecting three colors.

TRIL	TRCV on left side of runway	TRIR	TRCV on right side of runway
VASI—Visual Approach Slope Indicator			
V2L	2-box VASI on left side of runway	V6L	6-box VASI on left side of runway
V2R	2-box VASI on right side of runway	V6R	6-box VASI on right side of runway
V4L	4-box VASI on left side of runway	V12	12-box VASI on both sides of runway
V4R	4-box VASI on right side of runway	V16	16-box VASI on both sides of runway

NOTE: Approach slope angle and threshold crossing height will be shown when available; i.e., –GA 3.5° TCH 37'.

PILOT CONTROL OF AIRPORT LIGHTING

Key Mike	Function
7 times within 5 seconds	Highest intensity available
5 times within 5 seconds	Medium or lower intensity (Lower REIL or REIL-Off)
3 times within 5 seconds	Lowest intensity available (Lower REIL or REIL-Off)

Available systems will be indicated in the airport or military remarks, e.g., ACTIVATE HIRL Rwy 07–25, MALSR Rwy 07, and VASI Rwy 07–122.8.

Where the airport is not served by an instrument approach procedure and/or has an independent type system of different specification installed by the airport sponsor, descriptions of the type lights, method of control, and operating frequency will be explained in clear text. See AIM, “Basic Flight Information and ATC Procedures,” for detailed description of pilot control of airport lighting.

RUNWAY SLOPE

When available, runway slope data will only be provided for those airports with an approved FAA instrument approach procedure. Runway slope will be shown only when it is 0.3 percent or greater. On runways less than 8000 feet, the direction of the slope up will be indicated, e.g., 0.3% up NW. On runways 8000 feet or greater, the slope will be shown (up or down) on the runway end line, e.g., RWY 13: 0.3% up., RWY 21: Pole. Rgt tfc. 0.4% down.

RUNWAY END DATA

Information pertaining to the runway approach end such as approach lights, touchdown zone lights, runway end identification lights, visual glideslope indicators, displaced thresholds, controlling obstruction, and right hand traffic pattern, will be shown on the specific runway end. “Rgt tfc”—Right traffic indicates right turns should be made on landing and takeoff for specified runway end.

LAND AND HOLD SHORT OPERATIONS (LAHSO)

LAHSO is an acronym for “Land and Hold Short Operations.” These operations include landing and holding short of an intersection runway, an intersecting taxiway, or other predetermined points on the runway other than a runway or taxiway. Measured distance represents the available landing distance on the landing runway, in feet. Specific questions regarding these distances should be referred to the air traffic manager of the facility concerned. The Aeronautical Information Manual contains specific details on hold–short operations and markings.

RUNWAY DECLARED DISTANCE INFORMATION

TORA—Take-off Run Available. The length of runway declared available and suitable for the ground run of an aeroplane take-off.

TODA—Take-off Distance Available. The length of the take-off run available plus the length of the clearway, if provided.

ASDA—Accelerate-Stop Distance Available. The length of the take-off run available plus the length of the stopway, if provided.

LDA—Landing Distance Available. The length of runway which is declared available and suitable for the ground run of an aeroplane landing.

22 ARRESTING GEAR/SYSTEMS

Arresting gear is shown as it is located on the runway. The a–gear distance from the end of the appropriate runway (or into the overrun) is indicated in parentheses. A–Gear which has a bi–direction capability and can be utilized for emergency approach end engagement is indicated by a (B). The direction of engaging device is indicated by an arrow. Up to 15 minutes advance notice may be required for rigging A–Gear for approach and engagement. Airport listing may show availability of other than US Systems. This information is provided for emergency requirements only. Refer to current aircraft operating manuals for specific engagement weight and speed criteria based on aircraft structural restrictions and arresting system limitations.

Following is a list of current systems referenced in this publication identified by both Air Force and Navy terminology:

BI-DIRECTIONAL CABLE (B)

<u>TYPE</u>	<u>DESCRIPTION</u>
BAK-9	Rotary friction brake.
BAK-12A	Standard BAK-12 with 950 foot run out, 1-inch cable and 40,000 pound weight setting. Rotary friction brake.
BAK-12B	Extended BAK-12 with 1200 foot run, 1¼ inch Cable and 50,000 pounds weight setting. Rotary friction brake.
E28	Rotary Hydraulic (Water Brake).
M21	Rotary Hydraulic (Water Brake) Mobile.

The following device is used in conjunction with some aircraft arresting systems:

BAK-14	A device that raises a hook cable out of a slot in the runway surface and is remotely positioned for engagement by the tower on request. (In addition to personnel reaction time, the system requires up to five seconds to fully raise the cable.)
H	A device that raises a hook cable out of a slot in the runway surface and is remotely positioned for engagement by the tower on request. (In addition to personnel reaction time, the system requires up to one and one-half seconds to fully raise the cable.)

UNI-DIRECTIONAL CABLE

<u>TYPE</u>	<u>DESCRIPTION</u>
MB60	Textile brake—an emergency one-time use, modular braking system employing the tearing of specially woven textile straps to absorb the kinetic energy.
E5/E5-1/E5-3	Chain Type. At USN/USMC stations E-5 A-GEAR systems are rated, e.g., E-5 RATING-13R-1100 HW (DRY), 31L/R-1200 STD (WET). This rating is a function of the A-GEAR chain weight and length and is used to determine the maximum aircraft engaging speed. A dry rating applies to a stabilized surface (dry or wet) while a wet rating takes into account the amount (if any) of wet overrun that is not capable of withstanding the aircraft weight. These ratings are published under Military Service.

FOREIGN CABLE

<u>TYPE</u>	<u>DESCRIPTION</u>	<u>US EQUIVALENT</u>
44B-3H	Rotary Hydraulic (Water Brake)	
CHAG	Chain	E-5

UNI-DIRECTIONAL BARRIER

<u>TYPE</u>	<u>DESCRIPTION</u>
MA-1A	Web barrier between stanchions attached to a chain energy absorber.
BAK-15	Web barrier between stanchions attached to an energy absorber (water squeezer, rotary friction, chain). Designed for wing engagement.

NOTE: Landing short of the runway threshold on a runway with a BAK-15 in the underrun is a significant hazard. The barrier in the down position still protrudes several inches above the underrun. Aircraft contact with the barrier short of the runway threshold can cause damage to the barrier and substantial damage to the aircraft.

OTHER

<u>TYPE</u>	<u>DESCRIPTION</u>
EMAS	Engineered Material Arresting System, located beyond the departure end of the runway, consisting of high energy absorbing materials which will crush under the weight of an aircraft.

23 MILITARY SERVICE

Specific military services available at the airport are listed under this general heading. Remarks applicable to any military service are shown in the individual service listing.

24 JET AIRCRAFT STARTING UNITS (JASU)

The numeral preceding the type of unit indicates the number of units available. The absence of the numeral indicates ten or more units available. If the number of units is unknown, the number one will be shown. Absence of JASU designation indicates non-availability.

The following is a list of current JASU systems referenced in this publication:

USAF JASU (For variations in technical data, refer to T.O. 35-1-7.)

ELECTRICAL STARTING UNITS:

A/M32A-86	AC: 115/200v, 3 phase, 90 kva, 0.8 pf, 4 wire DC: 28v, 1500 amp, 72 kw (with TR pack)
MC-1A	AC: 115/208v, 400 cycle, 3 phase, 37.5 kva, 0.8 pf, 108 amp, 4 wire DC: 28v, 500 amp, 14 kw
MD-3	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 1500 amp, 45 kw, split bus
MD-3A	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 1500 amp, 45 kw, split bus
MD-3M	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 500 amp, 15 kw

MD-4 AC: 120/208v, 400 cycle, 3 phase, 62.5 kva, 0.8 pf, 175 amp, "WYE" neutral ground, 4 wire, 120v, 400 cycle, 3 phase, 62.5 kva, 0.8 pf, 303 amp, "DELTA" 3 wire, 120v, 400 cycle, 1 phase, 62.5 kva, 0.8 pf, 520 amp, 2 wire

AIR STARTING UNITS

AM32-95 150 +/- 5 lb/min (2055 +/- 68 cfm) at 51 +/- 2 psia
 AM32A-95 150 +/- 5 lb/min @ 49 +/- 2 psia (35 +/- 2 psig)
 LASS 150 +/- 5 lb/min @ 49 +/- 2 psia
 MA-1A 82 lb/min (1123 cfm) at 130° air inlet temp, 45 psia (min) air outlet press
 MC-1 15 cfm, 3500 psia
 MC-1A 15 cfm, 3500 psia
 MC-2A 15 cfm, 200 psia
 MC-11 8,000 cu in cap, 4000 psig, 15 cfm

COMBINED AIR AND ELECTRICAL STARTING UNITS:

AGPU AC: 115/200v, 400 cycle, 3 phase, 30 kw gen
 DC: 28v, 700 amp
 AIR: 60 lb/min @ 40 psig @ sea level
 AM32A-60* AIR: 120 +/- 4 lb/min (1644 +/- 55 cfm) at 49 +/- 2 psia
 AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire, 120v, 1 phase, 25 kva
 DC: 28v, 500 amp, 15 kw
 AM32A-60A AIR: 150 +/- 5 lb/min (2055 +/- 68 cfm) at 51 +/- 2 psia
 AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire
 DC: 28v, 200 amp, 5.6 kw
 AM32A-60B* AIR: 130 lb/min, 50 psia
 AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire
 DC: 28v, 200 amp, 5.6 kw

*NOTE: During combined air and electrical loads, the pneumatic circuitry takes preference and will limit the amount of electrical power available.

USN JASU

ELECTRICAL STARTING UNITS:

NC-8A/A1 DC: 500 amp constant, 750 amp intermittent, 28v;
 AC: 60 kva @ .8 pf, 115/200v, 3 phase, 400 Hz.
 NC-10A/A1/B/C DC: 750 amp constant, 1000 amp intermittent, 28v;
 AC: 90 kva, 115/200v, 3 phase, 400 Hz.

AIR STARTING UNITS:

GTC-85/GTE-85 120 lbs/min @ 45 psi.
 MSU-200NAV/A/U47A-5 204 lbs/min @ 56 psia.
 WELLS AIR START SYSTEM 180 lbs/min @ 75 psi or 120 lbs/min @ 45 psi. Simultaneous multiple start capability.

COMBINED AIR AND ELECTRICAL STARTING UNITS:

NCPP-105/RCPT 180 lbs/min @ 75 psi or 120 lbs/min @ 45 psi. 700 amp, 28v DC. 120/208v, 400 Hz AC, 30 kva.

JASU (ARMY)

59B2-1B 28v, 7.5 kw, 280 amp.

OTHER JASU

ELECTRICAL STARTING UNITS (DND):

CE12 AC 115/200v, 140 kva, 400 Hz, 3 phase
 CE13 AC 115/200v, 60 kva, 400 Hz, 3 phase
 CE14 AC/DC 115/200v, 140 kva, 400 Hz, 3 phase, 28vDC, 1500 amp
 CE15 DC 22-35v, 500 amp continuous 1100 amp intermittent
 CE16 DC 22-35v, 500 amp continuous 1100 amp intermittent soft start

AIR STARTING UNITS (DND):

CA2 ASA 45.5 psig, 116.4 lb/min

COMBINED AIR AND ELECTRICAL STARTING UNITS (DND)

CEA1 AC 120/208v, 60 kva, 400 Hz, 3 phase DC 28v, 75 amp
 AIR 112.5 lb/min, 47 psig

ELECTRICAL STARTING UNITS (OTHER)

C-26 28v 45kw 115-200v 15kw 380-800 Hz 1 phase 2 wire
 C-26-B, C-26-C 28v 45kw: Split Bus: 115-200v 15kw 380-800 Hz 1 phase 2 wire
 E3 DC 28v/10kw

AIR STARTING UNITS (OTHER):

A4 40 psi/2 lb/sec (LPAS Mk12, Mk12L, Mk12A, Mk1, Mk2B)
 MA-1 150 Air HP, 115 lb/min 50 psia
 MA-2 250 Air HP, 150 lb/min 75 psia

CARTRIDGE:

MXU-4A USAF

14 FUEL—MILITARY

Fuel available through US Military Base supply, DESC Into-Plane Contracts and/or reciprocal agreement is listed first and is followed by (Mil). At commercial airports where Into-Plane contracts are in place, the name of the refueling agent is shown. Military fuel should be used first if it is available. When military fuel cannot be obtained but Into-Plane contract fuel is available, Government aircraft must refuel with the contract fuel and applicable refueling agent to avoid any breach in contract terms and conditions. Fuel not available through the above is shown preceded by NC (no contract). When fuel is obtained from NC sources, local purchase procedures must be followed. The US Military Aircraft Identaplates DD Form 1896 (Jet Fuel), DD Form 1897 (Avgas) and AF Form 1245 (Avgas) are used at military installations only. The US Government Aviation Into-Plane Reimbursement (AIR) Card (currently issued by AVCARD) is the instrument to be used to obtain fuel under a DESC Into-Plane Contract and for NC purchases if the refueling agent at the commercial airport accepts the AVCARD. A current list of contract fuel locations is available online at www.desc.dla.mil/Static/ProductsAndServices.asp; click on the Commercial Airports button.

See legend item 14 for fuel code and description.

26 SUPPORTING FLUIDS AND SYSTEMS—MILITARY

CODE

ADI	Anti-Detonation Injection Fluid—Reciprocating Engine Aircraft.
W	Water Thrust Augmentation—Jet Aircraft.
WAI	Water-Alcohol Injection Type, Thrust Augmentation—Jet Aircraft.
SP	Single Point Refueling.
PRESAIR	Air Compressors rated 3,000 PSI or more.
De-Ice	Anti-icing/De-icing/Defrosting Fluid (MIL-A-8243).

OXYGEN:

LPOX	Low pressure oxygen servicing.
HPOX	High pressure oxygen servicing.
LHOX	Low and high pressure oxygen servicing.
LOX	Liquid oxygen servicing.
OXRB	Oxygen replacement bottles. (Maintained primarily at Naval stations for use in acft where oxygen can be replenished only by replacement of cylinders.)
OX	Indicates oxygen servicing when type of servicing is unknown.

NOTE: Combinations of above items is used to indicate complete oxygen servicing available;

LHOXRB	Low and high pressure oxygen servicing and replacement bottles;
LPOXRB	Low pressure oxygen replacement bottles only, etc.

NOTE: Aircraft will be serviced with oxygen procured under military specifications only. Aircraft will not be serviced with medical oxygen.

NITROGEN:

LPNIT	Low pressure nitrogen servicing.
HPNIT	High pressure nitrogen servicing.
LHNIT	Low and high pressure nitrogen servicing.

27 OIL—MILITARY

US AVIATION OILS (MIL SPECS):

CODE	GRADE, TYPE
O-113	1065, Reciprocating Engine Oil (MIL-L-6082)
O-117	1100, Reciprocating Engine Oil (MIL-L-6082)
O-117+	1100, O-117 plus cyclohexanone (MIL-L-6082)
O-123	1065, (Dispersant), Reciprocating Engine Oil (MIL-L-22851 Type III)
O-128	1100, (Dispersant), Reciprocating Engine Oil (MIL-L-22851 Type II)
O-132	1005, Jet Engine Oil (MIL-L-6081)
O-133	1010, Jet Engine Oil (MIL-L-6081)
O-147	None, MIL-L-6085A Lubricating Oil, Instrument, Synthetic
O-148	None, MIL-L-7808 (Synthetic Base) Turbine Engine Oil
O-149	None, Aircraft Turbine Engine Synthetic, 7.5c St
O-155	None, MIL-L-6086C, Aircraft, Medium Grade
O-156	None, MIL-L-23699 (Synthetic Base), Turboprop and Turboshaft Engines
JOAP/SOAP	Joint Oil Analysis Program. JOAP support is furnished during normal duty hours, other times on request. (JOAP and SOAP programs provide essentially the same service, JOAP is now the standard joint service supported program.)

28 TRANSIENT ALERT (TRAN ALERT)—MILITARY

Tran Alert service is considered to include all services required for normal aircraft turn-around, e.g., servicing (fuel, oil, oxygen, etc.), debriefing to determine requirements for maintenance, minor maintenance, inspection and parking assistance of transient aircraft. Drag chute repack, specialized maintenance, or extensive repairs will be provided within the capabilities and priorities of the base. Delays can be anticipated after normal duty hours/holidays/weekends regardless of the hours of transient maintenance operation. Pilots should not expect aircraft to be serviced for TURN-AROUNDS during time periods when servicing or maintenance manpower is not available. In the case of airports not operated exclusively by US military, the servicing indicated by the remarks will not always be available for US military

aircraft. When transient alert services are not shown, facilities are unknown. NO PRIORITY BASIS—means that transient alert services will be provided only after all the requirements for mission/tactical assigned aircraft have been accomplished.

29 AIRPORT REMARKS

The Attendance Schedule is the months, days and hours the airport is actually attended. Airport attendance does not mean watchman duties or telephone accessibility, but rather an attendant or operator on duty to provide at least minimum services (e.g., repairs, fuel, transportation).

Airport Remarks have been grouped in order of applicability. Airport remarks are limited to those items of information that are determined essential for operational use, i.e., conditions of a permanent or indefinite nature and conditions that will remain in effect for more than 30 days concerning aeronautical facilities, services, maintenance available, procedures or hazards, knowledge of which is essential for safe and efficient operation of aircraft. Information concerning permanent closing of a runway or taxiway will not be shown. A note "See Special Notices" shall be applied within this remarks section when a special notice applicable to the entry is contained in the Special Notices section of this publication.

Parachute Jumping indicates parachute jumping areas associated with the airport. See Parachute Jumping Area section of this publication for additional information.

Landing Fee indicates landing charges for private or non-revenue producing aircraft. In addition, fees may be charged for planes that remain over a couple of hours and buy no services, or at major airline terminals for all aircraft.

Note: Unless otherwise stated, remarks including runway ends refer to the runway's approach end.

30 MILITARY REMARKS

Military Remarks published at a joint Civil/Military facility are remarks that are applicable to the Military. At Military Facilities all remarks will be published under the heading Military Remarks. Remarks contained in this section may not be applicable to civil users. The first group of remarks is applicable to the primary operator of the airport. Remarks applicable to a tenant on the airport are shown preceded by the tenant organization, i.e., (A) (AF) (N) (ANG), etc. Military airports operate 24 hours unless otherwise specified. Airport operating hours are listed first (airport operating hours will only be listed if they are different than the airport attended hours or if the attended hours are unavailable) followed by pertinent remarks in order of applicability. Remarks will include information on restrictions, hazards, traffic pattern, noise abatement, customs/agriculture/immigration, and miscellaneous information applicable to the Military.

Type of restrictions:

CLOSED: When designated closed, the airport is restricted from use by all aircraft unless stated otherwise. Any closure applying to specific type of aircraft or operation will be so stated. USN/USMC/USAF airports are considered closed during non-operating hours. Closed airports may be utilized during an emergency provided there is a safe landing area.

OFFICIAL BUSINESS ONLY: The airfield is closed to all transient military aircraft for obtaining routine services such as fueling, passenger drop off or pickup, practice approaches, parking, etc. The airfield may be used by aircrews and aircraft if official government business (including civilian) must be conducted on or near the airfield and prior permission is received from the airfield manager.

AF OFFICIAL BUSINESS ONLY OR NAVY OFFICIAL BUSINESS ONLY: Indicates that the restriction applies only to service indicated.

PRIOR PERMISSION REQUIRED (PPR): Airport is closed to transient aircraft unless approval for operation is obtained from the appropriate commander through Chief, Airfield Management or Airfield Operations Officer. Official Business or PPR does not preclude the use of US Military airports as an alternate for IFR flights. If a non-US military airport is used as a weather alternate and requires a PPR, the PPR must be requested and confirmed before the flight departs. The purpose of PPR is to control volume and flow of traffic rather than to prohibit it. Prior permission is required for all aircraft requiring transient alert service outside the published transient alert duty hours. All aircraft carrying hazardous materials must obtain prior permission as outlined in AFJI 11-204, AR 95-27, OPNAVINST 3710.7.

Note: OFFICIAL BUSINESS ONLY AND PPR restrictions are not applicable to Special Air Mission (SAM) or Special Air Resource (SPAR) aircraft providing person or persons on board are designated Code 6 or higher as explained in AFJMAN 11-213, AR 95-11, OPNAVINST 3722-8J. Official Business Only or PPR do not preclude the use of the airport as an alternate for IFR flights.

31 WEATHER DATA SOURCES

Weather data sources will be listed alphabetically followed by their assigned frequencies and/or telephone number and hours of operation.

ASOS—Automated Surface Observing System. Reports the same as an AWOS-3 plus precipitation identification and intensity, and freezing rain occurrence (future enhancement).

AWOS—Automated Weather Observing System

AWOS-A—reports altimeter setting (all other information is advisory only).

AWOS-1—reports altimeter setting, wind data and usually temperature, dewpoint and density altitude.

AWOS-2—reports the same as AWOS-1 plus visibility.

AWOS-3—reports the same as AWOS-1 plus visibility and cloud/ceiling data.

See AIM, Basic Flight Information and ATC Procedures for detailed description of AWOS.

HIWAS—See RADIO AIDS TO NAVIGATION

LAWSR—Limited Aviation Weather Reporting Station where observers report cloud height, weather, obstructions to vision, temperature and dewpoint (in most cases), surface wind, altimeter and pertinent remarks.

LLWAS—indicates a Low Level Wind Shear Alert System consisting of a center field and several field perimeter anemometers.

SAWSR—identifies airports that have a Supplemental Aviation Weather Reporting Station available to pilots for current weather information.

SWSL—Supplemental Weather Service Location providing current local weather information via radio and telephone.

TDWR—indicates airports that have Terminal Doppler Weather Radar.

WSP—indicates airports that have Weather System Processor.

When the automated weather source is broadcast over an associated airport NAVAID frequency (see NAVAID line), it shall be indicated by a bold ASOS, AWOS, or HIWAS followed by the frequency, identifier and phone number, if available.

32 COMMUNICATIONS

Airport terminal control facilities and radio communications associated with the airport shall be shown. When the call sign is not the same as the airport name the call sign will be shown. Frequencies shall normally be shown in descending order with the primary frequency listed first. Frequencies will be listed, together with sectorization indicated by outbound radials, and hours of operation. Communications will be listed in sequence as follows:

Single Frequency Approach (SFA), Common Traffic Advisory Frequency (CTAF), Automatic Terminal Information Service (ATIS) and Aeronautical Advisory Stations (UNICOM) or (AUNICOM) along with their frequency is shown, where available, on the line following the heading "COMMUNICATIONS." When the CTAF and UNICOM frequencies are the same, the frequency will be shown as CTAF/UNICOM 122.8.

The FSS telephone nationwide is toll free 1-800-WX-BRIEF (1-800-992-7433). When the FSS is located on the field it will be indicated as "on arpt". Frequencies available at the FSS will follow in descending order. Remote Communications Outlet (RCO) providing service to the airport followed by the frequency and FSS RADIO name will be shown when available.

FSS's provide information on airport conditions, radio aids and other facilities, and process flight plans. Airport Advisory Service (AAS) is provided on the CTAF by FSS's for select non-tower airports or airports where the tower is not in operation.

(See AIM, Para 4-1-9 Traffic Advisory Practices at Airports Without Operating Control Towers or AC 90-42C.)

Aviation weather briefing service is provided by FSS specialists. Flight and weather briefing services are also available by calling the telephone numbers listed.

Remote Communications Outlet (RCO)—An unmanned air/ground communications facility that is remotely controlled and provides UHF or VHF communications capability to extend the service range of an FSS.

Civil Communications Frequencies—Civil communications frequencies used in the FSS air/ground system are operated on 122.0, 122.2, 123.6; emergency 121.5; plus receive-only on 122.1.

- a. 122.0 is assigned as the Enroute Flight Advisory Service frequency at selected FSS RADIO outlets.
- b. 122.2 is assigned as a common enroute frequency.
- c. 123.6 is assigned as the airport advisory frequency at select non-tower locations. At airports with a tower, FSS may provide airport advisories on the tower frequency when tower is closed.
- d. 122.1 is the primary receive-only frequency at VOR's.
- e. Some FSS's are assigned 50 kHz frequencies in the 122-126 MHz band (eg. 122.45). Pilots using the FSS A/G system should refer to this directory or appropriate charts to determine frequencies available at the FSS or remotized facility through which they wish to communicate.

Emergency frequency 121.5 and 243.0 are available at all Flight Service Stations, most Towers, Approach Control and RADAR facilities.

Frequencies published followed by the letter "T" or "R", indicate that the facility will only transmit or receive respectively on that frequency. All radio aids to navigation (NAVAID) frequencies are transmit only.

TERMINAL SERVICES

SFA—Single Frequency Approach.

CTAF—A program designed to get all vehicles and aircraft at airports without an operating control tower on a common frequency.

ATIS—A continuous broadcast of recorded non-control information in selected terminal areas.

D-ATIS—Digital ATIS provides ATIS information in text form outside the standard reception range of conventional ATIS via landline & data link communications and voice message within range of existing transmitters.

AUNICOM—Automated UNICOM is a computerized, command response system that provides automated weather, radio check capability and airport advisory information selected from an automated menu by microphone clicks.

UNICOM—A non-government air/ground radio communications facility which may provide airport information.

PTD—Pilot to Dispatcher.

APP CON—Approach Control. The symbol ® indicates radar approach control.

TOWER—Control tower.

GCA—Ground Control Approach System.

GND CON—Ground Control.

GCO—Ground Communication Outlet—An unstaffed, remotely controlled, ground/ground communications facility. Pilots at uncontrolled airports may contact ATC and FSS via VHF to a telephone connection to obtain an instrument clearance or close a VFR or IFR flight plan. They may also get an updated weather briefing prior to takeoff. Pilots will use four "key clicks" on the

VHF radio to contact the appropriate ATC facility or six “key clicks” to contact the FSS. The GCO system is intended to be used only on the ground.

DEP CON—Departure Control. The symbol **(R)** indicates radar departure control.

CLNC DEL—Clearance Delivery.

PRE TAXI CLNC—Pre taxi clearance.

VFR ADVSY SVC—VFR Advisory Service. Service provided by Non-Radar Approach Control.

Advisory Service for VFR aircraft (upon a workload basis) ctc APP CON.

COMD POST—Command Post followed by the operator call sign in parenthesis.

PMSV—Pilot-to-Metro Service call sign, frequency and hours of operation, when full service is other than continuous.

PMSV installations at which weather observation service is available shall be indicated, following the frequency and/or hours of operation as “Wx obsn svc 1900-0000Z+” or “other times” may be used when no specific time is given. PMSV facilities manned by forecasters are considered “Full Service”. PMSV facilities manned by weather observers are listed as “Limited Service”.

OPS—Operations followed by the operator call sign in parenthesis.

CON

RANGE

FLT FLW—Flight Following

MEDIVAC

NOTE: Communication frequencies followed by the letter “X” indicate frequency available on request.

(33) AIRSPACE

Information concerning Class B, C, and part-time D and E surface area airspace shall be published with effective times.

Class D and E surface area airspace that is continuous as established by Rulemaking Docket will not be shown.

CLASS B—Radar Sequencing and Separation Service for all aircraft in CLASS B airspace.

CLASS C—Separation between IFR and VFR aircraft and sequencing of VFR arrivals to the primary airport.

TRSA—Radar Sequencing and Separation Service for participating VFR Aircraft within a Terminal Radar Service Area.

Class C, D, and E airspace described in this publication is that airspace usually consisting of a 5 NM radius core surface area that begins at the surface and extends upward to an altitude above the airport elevation (charted in MSL for Class C and Class D). Class E surface airspace normally extends from the surface up to but not including the overlying controlled airspace.

When part-time Class C or Class D airspace defaults to Class E, the core surface area becomes Class E. This will be formatted as:

AIRSPACE: CLASS C svc “times” ctc **APP CON** other times CLASS E:

or

AIRSPACE: CLASS D svc “times” other times CLASS E.

When a part-time Class C, Class D or Class E surface area defaults to Class G, the core surface area becomes Class G up to, but not including, the overlying controlled airspace. Normally, the overlying controlled airspace is Class E airspace beginning at either 700’ or 1200’ AGL. This will be formatted as:

AIRSPACE: CLASS C svc “times” ctc **APP CON** other times CLASS G, with CLASS E 700’ (or 1200’) AGL & abv:

or

AIRSPACE: CLASS D svc “times” other times CLASS G with CLASS E 700’ (or 1200’) AGL & abv:

or

AIRSPACE: CLASS E svc “times” other times CLASS G with CLASS E 700’ (or 1200’) AGL & abv.

NOTE: AIRSPACE SVC “TIMES” INCLUDE ALL ASSOCIATED ARRIVAL EXTENSIONS. Surface area arrival extensions for instrument approach procedures become part of the primary core surface area. These extensions may be either Class D or Class E airspace and are effective concurrent with the times of the primary core surface area. For example, when a part-time Class C, Class D or Class E surface area defaults to Class G, the associated arrival extensions will default to Class G at the same time. When a part-time Class C or Class D surface area defaults to Class E, the arrival extensions will remain in effect as Class E airspace.

NOTE: CLASS E AIRSPACE EXTENDING UPWARD FROM 700 FEET OR MORE ABOVE THE SURFACE, DESIGNATED IN CONJUNCTION WITH AN AIRPORT WITH AN APPROVED INSTRUMENT PROCEDURE.

Class E 700’ AGL (shown as magenta vignette on sectional charts) and 1200’ AGL (blue vignette) areas are designated when necessary to provide controlled airspace for transitioning to/from the terminal and enroute environments. Unless otherwise specified, these 700’/1200’ AGL Class E airspace areas remain in effect continuously, regardless of airport operating hours or surface area status. These transition areas should not be confused with surface areas or arrival extensions.

(See Chapter 3, AIRSPACE, in the Aeronautical Information Manual for further details)

34 RADIO AIDS TO NAVIGATION

The Airport/Facility Directory lists, by facility name, all Radio Aids to Navigation that appear on National Aeronautical Navigation Services Visual or IFR Aeronautical Charts and those upon which the FAA has approved an Instrument Approach Procedure, with exception of selected TACANs. Military TACAN information will be published for Military facilities contained in this publication. All VOR, VORTAC, TACAN, ILS and MLS equipment in the National Airspace System has an automatic monitoring and shutdown feature in the event of malfunction. Unmonitored, as used in this publication, for any navigational aid, means that monitoring personnel cannot observe the malfunction or shutdown signal. The NAVAID NOTAM file identifier will be shown as "NOTAM FILE IAD" and will be listed on the Radio Aids to Navigation line. When two or more NAVAIDS are listed and the NOTAM file identifier is different from that shown on the Radio Aids to Navigation line, it will be shown with the NAVAID listing. NOTAM file identifiers for ILSs and its components (e.g., NDB (LOM) are the same as the associated airports and are not repeated. Automated Surface Observing System (ASOS), Automated Weather Observing System (AWOS), and Hazardous Inflight Weather Advisory Service (HIWAS) will be shown when this service is broadcast over selected NAVAIDS.

NAVAID information is tabulated as indicated in the following sample:

NAME (L) **ABVORTAC** 117.55 **ABE** Chan 122(Y) N40°43.60' W75°27.30' 180°4.1 NM to fld. 1110/8E. **AWOS. HIWAS.**

↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑

Class Frequency Identifier TACAN/DME Channel Geographical Position Site Elevation Bearing and distance facility to center of airport Magnetic Variation Automated Weather Observing System Hazardous Inflight Weather Advisory Service

VOR unusable 020°-060° byd 26 NM blo 3,500'

Restriction within the normal altitude/range of the navigational aid (See primary alphabetical listing for restrictions on VORTAC and VOR/DME).

Note: Those DME channel numbers with a (Y) suffix require TACAN to be placed in the "Y" mode to receive distance information.

HIWAS—Hazardous Inflight Weather Advisory Service is a continuous broadcast of inflight weather advisories including summarized SIGMETs, convective SIGMETs, AIRMETs and urgent PIREPs. HIWAS is presently broadcast over selected VOR's throughout the U.S.

ASR/PAR—Indicates that Surveillance (ASR) or Precision (PAR) radar instrument approach minimums are published in the U.S. Terminal Procedures. Only part-time hours of operation will be shown.

RADIO CLASS DESIGNATIONS

VOR/DME/TACAN Standard Service Volume (SSV) Classifications

SSV Class	Altitudes	Distance (NM)
(T) Terminal	1000' to 12,000'	25
(L) Low Altitude	1000' to 18,000'	40
(H) High Altitude	1000' to 14,500'	40
	14,500' to 18,000'	100
	18,000' to 45,000'	130
	45,000' to 60,000'	100

NOTE: Additionally, (H) facilities provide (L) and (T) service volume and (L) facilities provide (T) service. Altitudes are with respect to the station's site elevation. Coverage is not available in a cone of airspace directly above the facility.

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

The term VOR is, operationally, a general term covering the VHF omnidirectional bearing type of facility without regard to the fact that the power, the frequency protected service volume, the equipment configuration, and operational requirements may vary between facilities at different locations.

AB _____	Automatic Weather Broadcast.
DF _____	Direction Finding Service.
DME _____	UHF standard (TACAN compatible) distance measuring equipment.
DME(Y) _____	UHF standard (TACAN compatible) distance measuring equipment that require TACAN to be placed in the "Y" mode to receive DME.
GS _____	Glide slope.
H _____	Non-directional radio beacon (homing), power 50 watts to less than 2,000 watts (50 NM at all altitudes).
HH _____	Non-directional radio beacon (homing), power 2,000 watts or more (75 NM at all altitudes).
H-SAB _____	Non-directional radio beacons providing automatic transcribed weather service.
ILS _____	Instrument Landing System (voice, where available, on localizer channel).
IM _____	Inner marker.
ISMLS _____	Interim Standard Microwave Landing System.
LDA _____	Localizer Directional Aid.
LMM _____	Compass locator station when installed at middle marker site (15 NM at all altitudes).
LOM _____	Compass locator station when installed at outer marker site (15 NM at all altitudes).
MH _____	Non-directional radio beacon (homing) power less than 50 watts (25 NM at all altitudes).
MLS _____	Microwave Landing System.
MM _____	Middle marker.
OM _____	Outer marker.
S _____	Simultaneous range homing signal and/or voice.
SABH _____	Non-directional radio beacon not authorized for IFR or ATC. Provides automatic weather broadcasts.
SDF _____	Simplified Direction Facility.
TACAN _____	UHF navigational facility-omnidirectional course and distance information.
VOR _____	VHF navigational facility-omnidirectional course only.
VOR/DME _____	Collocated VOR navigational facility and UHF standard distance measuring equipment.
VORTAC _____	Collocated VOR and TACAN navigational facilities.
W _____	Without voice on radio facility frequency.
Z _____	VHF station location marker at a LF radio facility.

ILS FACILITY PERFORMANCE CLASSIFICATION CODES

Codes define the ability of an ILS to support autoland operations. The two portions of the code represent Official Category and farthest point along a Category I, II, or III approach that the Localizer meets Category III structure tolerances.

Official Category: I, II, or III; the lowest minima on published or unpublished procedures supported by the ILS.

Farthest point of satisfactory Category III Localizer performance for Category I, II, or III approaches: A – 4 NM prior to runway threshold, B – 3500 ft prior to runway threshold, C – glide angle dependent but generally 750–1000 ft prior to threshold, T – runway threshold, D – 3000 ft after runway threshold, and E – 2000 ft prior to stop end of runway.

ILS information is tabulated as indicated in the following sample:

ILS/DME 108.5 I-ORL Chan 22 Rwy 18. Class IIE. LOM HERNY NDB.

ILS Facility Performance
Classification Code

FREQUENCY PAIRING PLAN AND MLS CHANNELING

MLS CHANNEL	VHF FREQUENCY	TACAN CHANNEL	MLS CHANNEL	VHF FREQUENCY	TACAN CHANNEL	MLS CHANNEL	VHF FREQUENCY	TACAN CHANNEL
500	108.10	18X	568	109.45	31Y	636	114.15	88Y
502	108.30	20X	570	109.55	32Y	638	114.25	89Y
504	108.50	22X	572	109.65	33Y	640	114.35	90Y
506	108.70	24X	574	109.75	34Y	642	114.45	91Y
508	108.90	26X	576	109.85	35Y	644	114.55	92Y
510	109.10	28X	578	109.95	36Y	646	114.65	93Y
512	109.30	30X	580	110.05	37Y	648	114.75	94Y
514	109.50	32X	582	110.15	38Y	650	114.85	95Y
516	109.70	34X	584	110.25	39Y	652	114.95	96Y
518	109.90	36X	586	110.35	40Y	654	115.05	97Y
520	110.10	38X	588	110.45	41Y	656	115.15	98Y
522	110.30	40X	590	110.55	42Y	658	115.25	99Y
524	110.50	42X	592	110.65	43Y	660	115.35	100Y
526	110.70	44X	594	110.75	44Y	662	115.45	101Y
528	110.90	46X	596	110.85	45Y	664	115.55	102Y
530	111.10	48X	598	110.95	46Y	666	115.65	103Y
532	111.30	50X	600	111.05	47Y	668	115.75	104Y
534	111.50	52X	602	111.15	48Y	670	115.85	105Y
536	111.70	54X	604	111.25	49Y	672	115.95	106Y
538	111.90	56X	606	111.35	50Y	674	116.05	107Y
540	108.05	17Y	608	111.45	51Y	676	116.15	108Y
542	108.15	18Y	610	111.55	52Y	678	116.25	109Y
544	108.25	19Y	612	111.65	53Y	680	116.35	110Y
546	108.35	20Y	614	111.75	54Y	682	116.45	111Y
548	108.45	21Y	616	111.85	55Y	684	116.55	112Y
550	108.55	22Y	618	111.95	56Y	686	116.65	113Y
552	108.65	23Y	620	113.35	80Y	688	116.75	114Y
554	108.75	24Y	622	113.45	81Y	690	116.85	115Y
556	108.85	25Y	624	113.55	82Y	692	116.95	116Y
558	108.95	26Y	626	113.65	83Y	694	117.05	117Y
560	109.05	27Y	628	113.75	84Y	696	117.15	118Y
562	109.15	28Y	630	113.85	85Y	698	117.25	119Y
564	109.25	29Y	632	113.95	86Y			
566	109.35	30Y	634	114.05	87Y			

FREQUENCY PAIRING PLAN AND MLS CHANNELING

The following is a list of paired VOR/ILS VHF frequencies with TACAN channels and MLS channels.


TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL	TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL	TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL
2X	134.5	-	19Y	108.25	544	25X	108.80	-
2Y	134.55	-	20X	108.30	502	25Y	108.85	556
11X	135.4	-	20Y	108.35	546	26X	108.90	508
11Y	135.45	-	21X	108.40	-	26Y	108.95	558
12X	135.5	-	21Y	108.45	548	27X	109.00	-
12Y	135.55	-	22X	108.50	504	27Y	109.05	560
17X	108.00	-	22Y	108.55	550	28X	109.10	510
17Y	108.05	540	23X	108.60	-	28Y	109.15	562
18X	108.10	500	23Y	108.65	552	29X	109.20	-
18Y	108.15	542	24X	108.70	506	29Y	109.25	564
19X	108.20	-	24Y	108.75	554	30X	109.30	512

2								
2								
TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL	TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL	TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL
30Y	109.35	566	63X	133.60	-	95Y	114.85	650
31X	109.40	-	63Y	133.65	-	96X	114.90	-
31Y	109.45	568	64X	133.70	-	96Y	114.95	652
32X	109.50	514	64Y	133.75	-	97X	115.00	-
32Y	109.55	570	65X	133.80	-	97Y	115.05	654
33X	109.60	-	65Y	133.85	-	98X	115.10	-
33Y	109.65	572	66X	133.90	-	98Y	115.15	656
34X	109.70	516	66Y	133.95	-	99X	115.20	-
34Y	109.75	574	67X	134.00	-	99Y	115.25	658
35X	109.80	-	67Y	134.05	-	100X	115.30	-
35Y	109.85	576	68X	134.10	-	100Y	115.35	660
36X	109.90	518	68Y	134.15	-	101X	115.40	-
36Y	109.95	578	69X	134.20	-	101Y	115.45	662
37X	110.00	-	69Y	134.25	-	102X	115.50	-
37Y	110.05	580	70X	112.30	-	102Y	115.55	664
38X	110.10	520	70Y	112.35	-	103X	115.60	-
38Y	110.15	582	71X	112.40	-	103Y	115.65	666
39X	110.20	-	71Y	112.45	-	104X	115.70	-
39Y	110.25	584	72X	112.50	-	104Y	115.75	668
40X	110.30	522	72Y	112.55	-	105X	115.80	-
40Y	110.35	586	73X	112.60	-	105Y	115.85	670
41X	110.40	-	73Y	112.65	-	106X	115.90	-
41Y	110.45	588	74X	112.70	-	106Y	115.95	672
42X	110.50	524	74Y	112.75	-	107X	116.00	-
42Y	110.55	590	75X	112.80	-	107Y	116.05	674
43X	110.60	-	75Y	112.85	-	108X	116.10	-
43Y	110.65	592	76X	112.90	-	108Y	116.15	676
44X	110.70	526	76Y	112.95	-	109X	116.20	-
44Y	110.75	594	77X	113.00	-	109Y	116.25	678
45X	110.80	-	77Y	113.05	-	110X	116.30	-
45Y	110.85	596	78X	113.10	-	110Y	116.35	680
46X	110.90	528	78Y	113.15	-	111X	116.40	-
46Y	110.95	598	79X	113.20	-	111Y	116.45	682
47X	111.00	-	79Y	113.25	-	112X	116.50	-
47Y	111.05	600	80X	113.30	-	112Y	116.55	684
48X	111.10	530	80Y	113.35	620	113X	116.60	-
48Y	111.15	602	81X	113.40	-	113Y	116.65	686
49X	111.20	-	81Y	113.45	622	114X	116.70	-
49Y	111.25	604	82X	113.50	-	114Y	116.75	688
50X	111.30	532	82Y	113.55	624	115X	116.80	-
50Y	111.35	606	83X	113.60	-	115Y	116.85	690
51X	111.40	-	83Y	113.65	626	116X	116.90	-
51Y	111.45	608	84X	113.70	-	116Y	116.95	692
52X	111.50	534	84Y	113.75	628	117X	117.00	-
52Y	111.55	610	85X	113.80	-	117Y	117.05	694
53X	111.60	-	85Y	113.85	630	118X	117.10	-
53Y	111.65	612	86X	113.90	-	118Y	117.15	696
54X	111.70	536	86Y	113.95	632	119X	117.20	-
54Y	111.75	614	87X	114.00	-	119Y	117.25	698
55X	111.80	-	87Y	114.05	634	120X	117.30	-
55Y	111.85	616	88X	114.10	-	120Y	117.35	-
56X	111.90	538	88Y	114.15	636	121X	117.40	-
56Y	111.95	618	89X	114.20	-	121Y	117.45	-
57X	112.00	-	89Y	114.25	638	122X	117.50	-
57Y	112.05	-	90X	114.30	-	122Y	117.55	-
58X	112.10	-	90Y	114.35	640	123X	117.60	-
58Y	112.15	-	91X	114.40	-	123Y	117.65	-
59X	112.20	-	91Y	114.45	642	124X	117.70	-
59Y	112.25	-	92X	114.50	-	124Y	117.75	-
60X	133.30	-	92Y	114.55	644	125X	117.80	-
60Y	133.35	-	93X	114.60	-	125Y	117.85	-
61X	133.40	-	93Y	114.65	646	126X	117.90	-
61Y	133.45	-	94X	114.70	-	126Y	117.95	-
62X	133.50	-	94Y	114.75	648			
62Y	133.55	-	95X	114.80	-			


(35) COMM/NAV/WEATHER REMARKS:
 These remarks consist of pertinent information affecting the current status of communications, NAVAIDs and weather.

AIR PARK SOUTH (See OZARK)**ALBANY MUNICIPAL** (K19) 1 N UTC-6(-5DT) N40°15.73' W94°20.34'

886 B FUEL 100LL NOTAM FILE COU

RWY 01-19: H3300X50 (CONC) LIRL**RWY 01:** APAP(PNIL). Trees.**RWY 19:** APAP(PNIL). Trees. Rgt tfc.**AIRPORT REMARKS:** Unattended. Self fueller—24 hrs. Wildlife on and in/ovf arpt. Rwy 01-19 various thld and edge lgts are broken or missing. Rwy 01 PNIL OTS indef. Rwy 19 PNIL OTS indef.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE FOD.**LAMONI (H) VORTAC** 116.7 LMN Chan 114 N40°35.81'W93°58.06' 213° 26.3 NM to fld. 1140/7E **HIWAS.****ALGOA** N38°32.89' W92°04.32' NOTAM FILE JEF.**NDB (MHW/LOM)** 397 JE 300° 4.7 NM to Jefferson City Mem.**KANSAS CITY****L-27B****AMAZON** N39°53.04' W94°54.49' NOTAM FILE STJ.**NDB (MHW)** 233 AZN 175° 6.7 NM to Rosecrans Mem.**KANSAS CITY****L-10J****AURORA****JERRY SUMNERS SR AURORA MUNI** (2H2) 2 SE UTC-6(-5DT) N36°57.74' W93°41.72'

1434 B S4 FUEL 100LL NOTAM FILE COU

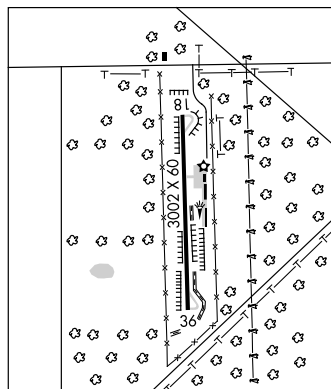RWY 18-36: H3002X60 (ASPH) MIRL 0.3% up N**RWY 18:** Trees.**RWY 36:** Trees. Rgt tfc.**AIRPORT REMARKS:** Attended Mon-Sat 1400Z†-dusk. For after hrs svc call 417-236-4118. Mechanic on duty Mon thru Sat, major power plant repairs avbl call 417-678-3000. ACTIVATE MIRL Rwy 18-36—CTAF.**COMMUNICATIONS:** CTAF/UNICOM 122.8**® SPRINGFIELD APP/DEP CON** 124.95**RADIO AIDS TO NAVIGATION:** NOTAM FILE SGF.**SPRINGFIELD (H) VORTAC** 116.9 SGF Chan 116 N37°21.36'W93°20.04' 212° 29.3 NM to fld. 1240/4E. **HIWAS.****KANSAS CITY****L-16F****IAP**

AVA BILL MARTIN MEM (AOV) 2 NW UTC-6(-5DT) N36°58.31' W92°40.92'

KANSAS CITY

1311 B NOTAM FILE COU

L-16G

RWY 13-31: H3634X50 (ASPH) MIRL 0.9% up SE

IAP

RWY 13: SAVASI(S2L)—GA 3.0° TCH 34'. Trees.

RWY 31: Trees.

AIRPORT REMARKS: Unattended. Ultralight activity on and invof arpt. Rwy

13-31 numerous cracks with grass and weeds growing. NSTD rwy

safety area byd Rwy 13 end, insufficient length and large drop off,

Rwy 13 VASI OTs indef. ACTIVATE MIRL Rwy 13-31—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.7

® **SPRINGFIELD APP/DEP CON** 126.35


RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

DOGWOOD (L) VORTAC 109.4 DGD Chan 31 N37°01.41'

W92°52.62' 102° 9.9 NM to fld. 1600/6E.

BILMART NDB (MHW) 341 AOV N36°58.19' W92°40.64' at fld.

SHUTDOWN.

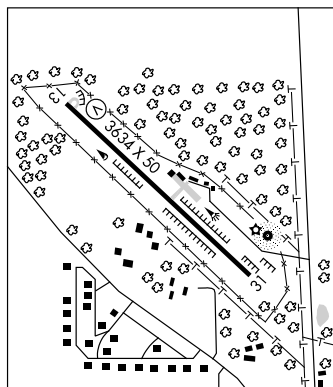

BATES CITY

HARRY S. TRUMAN RGNL (2M1) 2 NW UTC-6(-5DT) N39°01.18' W94°05.19'

KANSAS CITY

860 NOTAM FILE COU

RWY 03-21: 4400X70 (GRVL)

RWY 03: Trees. RWY 21: Tree.

AIRPORT REMARKS: Attended Mon-Fri 1400-0000Z. After 0000Z all gates are locked. Migratory birds on and invof

arpt during fall and winter. Rwy 03-21 insufficient rwy safety area lengths beyond each rwy end. Rwy 03 end has

steep slope with fence, trees, and road. Rwy 21 end has fence, trees and road. Rwy 03-21 width variance

70-80'.

COMMUNICATIONS: CTAF/UNICOM 122.8

BETHANY MEM (75K) 2 NE UTC-6(-5DT) N40°16.61' W94°00.45'

OMAHA

1035 B NOTAM FILE COU

RWY 03-21: H2255X48 (ASPH) LIRL (NSTD)

RWY 03: Ground. Rgt tfc. RWY 21: Thld dspld 143'. Trees.

AIRPORT REMARKS: Unattended. Rwy 03-21 has multiple open cracks, pavement raveling and producing foreign object

damage. Rwy 03 NSTD basic markings, rwy centerline incorrect spacing of stripes and gaps at designation

marking. Rwy 21 NSTD basic markings, rwy centerline incorrect spacing of stripes and gaps at designation

markings and incorrect lateral spacing of designation numbers. NSTD rwy safety areas byd each rwy end, Rwy 03

incorrect terrain gradients, Rwy 21 large drop off, brush, small trees, fence and road. Rwy 03-21 NSTD

LIRL—thld lgts for Rwy 03 located 40' SW of thld; Rwy end lgts for Rwy 21 located 15-18' NE of rwy end.

COMMUNICATIONS: CTAF 122.9

BILMART N36°58.19' W92°40.64' NOTAM FILE COU.

KANSAS CITY

NDB (MHW) 341 AOV at Ava Bill Martin Mem. SHUTDOWN.

L-16G

BISMARCK MEM (H57) 1 SE UTC-6(-5DT) N37°45.53' W90°37.01'

ST LOUIS

1038 B NOTAM FILE STL

RWY 17-35: H2050X50 (ASPH) LIRL (NSTD)

RWY 17: Trees. RWY 35: Tree. Rgt tfc.

AIRPORT REMARKS: Attended irregularly. Wildlife on and invof arpt. Rwy 17-35 NSTD LIRL, 2 thld lgts 3-7' down rwy at

each thld.

COMMUNICATIONS: CTAF 122.9

BOLIVAR MUNI (M17) 4 E UTC-6(-5DT) N37°35.77' W93°20.86'

1092 B S6 FUEL 100LL, JET A NOTAM FILE COU

RWY 18-36: H4000X75 (ASPH) S-12.5 MIRL

RWY 18: PAPI(P2L)—GA 3.0° TCH 38'. Trees.

RWY 36: PAPI(P2L)—GA 3.0° TCH 35'. Trees.

AIRPORT REMARKS: Attended Mon-Sat 1400-2300Z±. Fuel avbl 24 hrs.

Extensive student pilot training invof arpt. Wildlife and birds on

and invof arpt. Rwy 18-36 MIRL dusk-0530Z±; after 0530Z±

ACTIVATE—CTAF. PAPI Rwy 18 and Rwy 36 on continuously.

COMMUNICATIONS: CTAF/UNICOM 123.0

® **SPRINGFIELD APP/DEP CON** 124.95

RADIO AIDS TO NAVIGATION: NOTAM FILE SGF.

SPRINGFIELD (H) VORTAC 116.9 SGF Chan 116 N37°21.36'


W93°20.04' 353° 14.4 NM to fld.

1240/4E. HIWAS

KANSAS CITY

L-16F

IAP

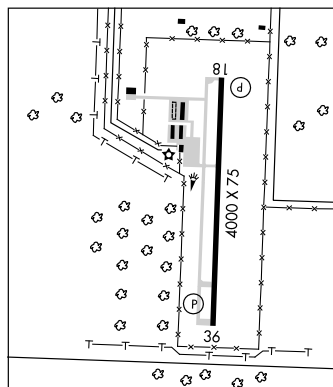

BOLLINGER-CRASS MEM (See VAN BUREN)

BOONVILLE

JESSE VIERTEL MEM (VER) 3 SE UTC-6(-5DT) N38°56.80' W92°40.96'

715 B S4 FUEL 100LL, JET A, MOGAS NOTAM FILE COU

RWY 18-36: H4000X75 (ASPH) S-12.5 MIRL

RWY 18: REIL. PAPI(P4L)—GA 3.0° TCH 27'. Tree.

RWY 36: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Tree.

AIRPORT REMARKS: Attended 1400-0200Z±. Self svc fuel after 0200Z±.

Extensive student pilot training invof arpt. Noise abatement, for
Rwy 36 fly rwy centerline to 1500' before turning on course.

ACTIVATE MIRL Rwy 18-36, PAPI Rwy 18 and 36 REIL Rwy 18
and 36—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.7

® **MIZZU APP/DEP CON** 124.375

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.


HALLSVILLE (L) VORTAC 114.2 HLV Chan 89 N39°06.81'

W92°07.69' 243° 27.8 NM to fld. 920/6E.

KANSAS CITY

L-27A

IAP

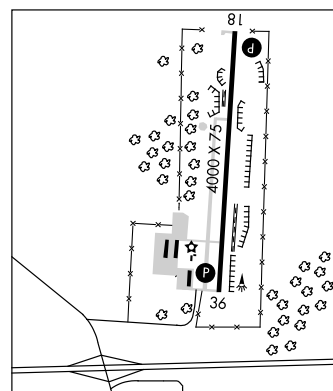

BOWLING GREEN MUNI (H19) 2 NW UTC-6(-5DT) N39°22.20' W91°13.16'

KANSAS CITY

886 B NOTAM FILE STL

L-27B

RWY 13-31: H3204X50(ASPH) S-12.5 LIRL (NSTD) 0.4% up SE

IAP

RWY 13: Trees.

RWY 31: Trees.

AIRPORT REMARKS: Attended continuously. Arpt lgts opr dusk-0300Z‡.

ACTIVATE LIRL Rwy 13-31 after 0600Z‡—CTAF.


COMMUNICATIONS: CTAF/UNICOM 122.8 UNICOM not monitored on regular basis.

KANSAS CITY CENTER APP/DEP CON 135.525

RADIO AIDS TO NAVIGATION: NOTAM FILE UIN.

QUINCY (H) VORTAC 113.6 UIN Chan 83 N39°50.88'

W91°16.74' 169° 28.8 NM to fld. 710/5E. HIWAS.

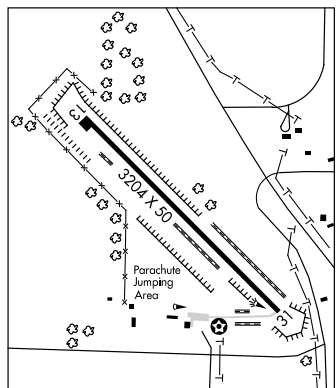**BRANSON** (BBG) 8 SSE UTC-6(-5DT) N36°31.92' W93°12.03'

KANSAS CITY

1302 B FUEL 100LL, JET A ARFF Index—See Remarks NOTAM FILE BBG

H-6I, L-16F

RWY 14-32: H7140X150 (CONC-GRVD) S-75, D-200, 2S-175, 2D-350, 2D/2D2-700 HIRL

IAP, AD

0.7% up SE

RWY 14: REIL. PAPI(P4L)—GA 3.0° TCH 51'. Rgt tfc.

RWY 32: MALSF. PAPI(P4L)—GA 3.0° TCH 50'.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 14: TORA-7140 TODA-7140 ASDA-7140 LDA-7140

RWY 32: TORA-7140 TODA-7140 ASDA-7140 LDA-7140

AIRPORT REMARKS: Attended continuously. Self svc fuel avbl with credit card. 100LL avbl at general aviation apron. Birds invof arpt.

Taxilane between commercial apron and general aviation apron unlit, retro-reflective markers in place. Class I, ARFF Index B. ARFF Index C firefighting equipment avbl upon request. Rwy 32 calm wind rwy. Arpt located in hilly terrain. Aft equipped with a terrain avoidance warning system may experience system activation on final approach. When twr clsd ACTIVATE HIRL Rwy 14-32, MALSF Rwy 32, REIL Rwy 14, PAPI Rwy 14 and Rwy 32—CTAF.

WEATHER DATA SOURCES: AWOS-3 124.625 (417) 334-0218.

COMMUNICATIONS: CTAF 128.15 ATIS 124.625 UNICOM 122.95

® SPRINGFIELD APP/DEP CON 126.35

TOWER 128.15 (1300-0300Z‡) GND CON 118.4

CLNC DEL 118.4 (126.35 Provided by SPRINGFIELD APP CON


when twr clsd)

AIRSPACE: CLASS D svc 1300-0300Z‡ other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE HRO

HARRISON (L) VORW/DME 112.5 HRO Chan 72 N36°19.10' W93°12.80' 359° 12.8 NM to fld. 1400/4E.

ILS/DME 111.35 I-BBG Chan 50(Y) Rwy 32. ILS unmonitored when twr clsd.

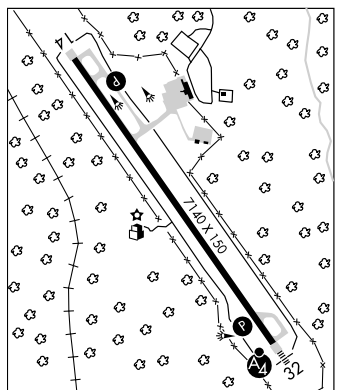**BRANSON WEST MUNI—EMERSON FIELD** (FWB) 2 W UTC-6(-5DT) N36°41.91' W93°24.13'

KANSAS CITY

1348 B FUEL 100LL, JET A NOTAM FILE FWB Not insp.

H-6I, L-16F

RWY 03-21: H5000X75 (CONC) S-30 MIRL RWY 03: REIL. PAPI(P4R)—GA 3.0° TCH 40'.

RWY 21: REIL. PAPI(P4L)—GA 3.0° TCH 40'.

AIRPORT REMARKS: Attended Apr-Nov 1300-0200Z‡, Dec-Mar 1300-2300Z‡. Self svc 100LL avbl with credit card 24 hrs. Birds invof arpt. ACTIVATE MIRL Rwy 03-21, PAPI Rwy 03 and Rwy 21—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.725 (417) 272-3922.

COMMUNICATIONS: UNICOM 123.0

RADIO AIDS TO NAVIGATION: NOTAM FILE HRO

HARRISON (L) VORW/DME 112.5 HRO Chan 72 N36°19.10' W93°12.80' 334° 24.5 NM to fld. 1400/4E.

BRAYMER N39°37.83' W93°52.52' NOTAM FILE COU.

KANSAS CITY

(L) VORW/DME 111.2 BQS Chan 49 230° 23.3 NM to Cameron Mem. 930/3E.

H-5C, L-27A

BROOKFIELD N39°45.85' W93°06.55' NOTAM FILE COU.

KANSAS CITY

NDB (MHW) 383 BZK 271° 17.9 NM to Chillicothe Muni. NDB OTS indef. SHUTDOWN.

L-27A

BROOKFIELD**NORTH CENTRAL MISSOURI RGNL** (M08) 2 E UTC-6(-5DT) N39°46.20' W93°00.77'

KANSAS CITY

843 B FUEL 100LL, JET A NOTAM FILE COU

L-27A

RWY 18-36: H4003X75 (CONC) S-12.5 MIRL

IAP

RWY 18: REIL. PAPI(P4L)—GA 3.5° TCH 47'. Tree.

RWY 36: REIL. PAPI(P4L)—GA 3.0° TCH 37'. Trees.

AIRPORT REMARKS: Attended irregularly. Self-svc fuel avbl 24 hrs. For svc after hrs, call phone numbers posted on arpt management office door. Numerous waterfowl and deer on and invof arpt. Tower 319' AGL, 3500' north, 1925' east of Rwy 18 end. ACTIVATE MIRL Rwy 18-36; PAPI Rwy 18 and Rwy 36; REIL Rwy 18 and Rwy 36—CTAF.

COMMUNICATIONS: CTAF 122.9

KANSAS CITY CENTER APP/DEP CON 125.25

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

MACON (L) VOR/DME 112.9 MCM Chan 76 N39°39.24' W92°28.93' 280° 25.5 NM to fld. 870/6E.

BUCKHORN N37°41.85' W92°06.23' NOTAM FILE TBN.

KANSAS CITY

NDB (MH) 391 BHN 323° 3.2 NM to Waynesville ST. Robert Rgnl Forney Fld. NDB unmonitored

L-16F

Mon-Fri 0300-1200Z±, 24 hrs holidays and weekends.

BUFFALO MUNI (H17) 1 N UTC-6(-5DT) N37°39.25' W93°05.22'

KANSAS CITY

1154 B NOTAM FILE COU

L-16F

RWY 03-21: H3220X50 (ASPH) LIRL

RWY 03: Thld dsplcd 272'. Trees.

RWY 21: Tree.

AIRPORT REMARKS: Unattended. Wildlife on and invof arpt. Ultralight acft on and invof apt. Rwy 03-21 width variance 50-52'.

Insufficient rwy safety area length byd each rwy end, fences, brush, trees. ACTIVATE LIRL Rwy 03-21—CTAF.


COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE SGF.

SPRINGFIELD (H) VORTAC 116.9 SGF Chan 116 N37°21.36'

W93°20.04' 029° 21.4 NM to fld. 1240/4E. HIWAS.

HELIPAD H1: H40X40 (ASPH)

HELIPORT REMARKS: Helipad H1 perimeter lights. 5 landing direction lights extending NE. Apch slope 8 to 1 to helipad, from northeast, arpt bcn 260' south of helipad, 5 to 1 aprch slope. ACTIVATE H1 perimeter lights—CTAF.

**BUTLER** N38°16.33' W94°29.29' NOTAM FILE COU.

KANSAS CITY

(H) VORTAC 115.9 BUM Chan 106 074° 7.1 NM to Butler Mem. 890/7E. HIWAS.

H-5C, L-10J, 16F

BUTLER MEM (BUM) 2 N UTC-6(-5DT) N38°17.39' W94°20.41'

892 B S2 FUEL 100LL NOTAM FILE COU

RWY 18-36: H4000X75 (ASPH-RFSC) S-12 MIRL 0.6% up S.

RWY 18: PAPI(P2L)—GA 3.0° TCH 37'. Trees.

RWY 36: PAPI(P2L)—GA 3.0° TCH 36'. Trees.

AIRPORT REMARKS: Attended continuously. Parachute Jumping. Major power plant repairs avbl. Ultralights on and invof arpt. Two twrs +195' and +411', approximately 7,000' and 14,000' S of Rwy 36 thld. PAPI Rwy 18 and Rwy 36 operates 24 hrs.

WEATHER DATA SOURCES: HIWAS 115.9 BUM.

COMMUNICATIONS: CTAF 122.9

RCO 122.1R 115.9T (COLUMBIA RADIO)

® KANSAS CITY CENTER APP/DEP CON 125.55

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.


(H) VORTAC 115.9 BUM Chan 106 N38°16.33' W94°29.29'

074° 7.1 NM to fld. 890/7E. HIWAS.

KANSAS CITY

L-16F

IAP



CABOOL MEM (TVB) 1 NE UTC-6(-5DT) N37°07.95' W92°05.04'

1220 B FUEL 100LL, MOGAS NOTAM FILE COU

RWY 03-21: H3002X50 (ASPH-AFSC) S-4 MIRL 0.5% up SW

RWY 03: Road. Rgt tfc. RWY 21: Trees.

AIRPORT REMARKS: Unattended. For fuel call phone numbers posted at terminal. Ultralight activity on and invof arpt. Birds invof rwy. Insufficient rwy safety area length byd Rwy 21 end. Bcn located .9 of mile W/NW of arpt on top of water twr. ACTIVATE MIRL Rwy 03-21—CTAF.

COMMUNICATIONS: CTAF 122.9

KANSAS CITY CENTER APP/DEP CON 128.35

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.


MAPLES (L) VORTAC 113.4 MAP Chan 81 N37°35.45'

W91°47.32' 201° 30.9 NM to fld. 1370/6E. HIWAS.

KANSAS CITY

L-16G

IAP

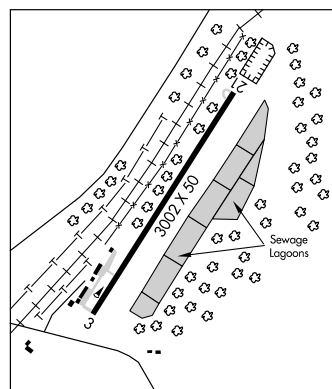

CAMDENTON MEM (H21) 3 SE UTC-6(-5DT) N37°58.44' W92°41.47'

KANSAS CITY

1062 B S4 FUEL 100LL, JET A NOTAM FILE COU
RWY 15-33: H4000X75 (ASPH) S-12.5 MIRL 0.3% up SE

L-16G

RWY 15: REIL. PAPI(P4L)—GA 3.0° TCH 41'. Trees.

IAP

RWY 33: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Trees.

AIRPORT REMARKS: Attended Oct-Mar 1400-2300Z†, Apr-Sep

1400-0100Z†. For fuel after hrs call number on terminal door.

When landing Rwy 33, be alert to possible low level wind shear when winds are out of east or west. Be alert to banner towing on and in/ovf arpt. CAUTION: Ultralight activity on and in/ovf arpt.

Wildlife on and in/ovf arpt. MIRL Rwy 15-33 dusk-0530Z†. After

0530Z† ACTIVATE MIRL Rwy 15-33 and REIL Rwy 15 and Rwy

33—CTAF. PAPI Rwy 15 and Rwy 33 24 hrs.


COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ MIZZU APP/DEP CON 124.1

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

SUNSHINE (L) VORW/DME 108.4 SHY Chan 21 N38°02.44'

W92°36.15' 222° 5.8 NM to fld. 910/5E.

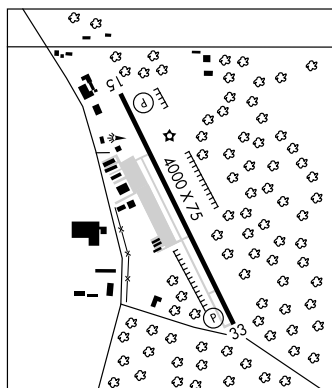**CAMERON MEM** (EZZ) 2 SW UTC-6(-5DT) N39°43.65' W94°16.58'

KANSAS CITY

1040 B FUEL 100LL NOTAM FILE COU

L-27A

RWY 17-35: H4000X75 (CONC) S-30 MIRL 0.4% up N

IAP

RWY 17: REIL. PAPI(P4L)—GA 3.0° TCH 21'.

RWY 35: REIL. PAPI(P4L)—GA 3.0° TCH 22'. Trees.

AIRPORT REMARKS: Attended Mon-Fri 1500-2300Z†, Sat irregularly.

Automated self fuel avbl 24 hrs. MIRL Rwy 17-35, PAPI Rwy 17

and Rwy 35, REIL Rwy 17 and Rwy 35 opr dusk-0600Z†, after

0600Z† ACTIVATE and incr ints—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ KANSAS CITY APP/DEP CON 118.4 CLNC DEL 121.6


RADIO AIDS TO NAVIGATION: NOTAM FILE STJ.

ST JOSEPH (H) VORTAC 115.5 STJ Chan 102 N39°57.64'

W94°55.51' 107° 33.1 NM to fld. 1160/8E.

NDB (MHW) 394 EZZ N39°43.76' W94°16.34' at fld.

NOTAM FILE COU.

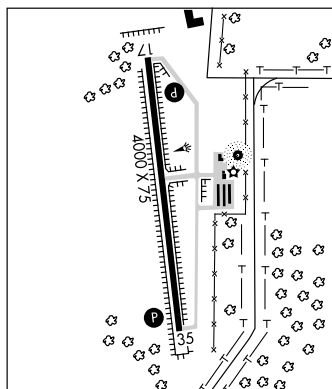

CAMPBELL MUNI (34M) 3 E UTC-6(-5DT) N36°29.16' W90°00.94'

ST. LOUIS
L-16H

284 NOTAM FILE STL

RWY 10-28: H3000X50 (ASPH) LIRL (NSTD)


RWY 18: Road.

AIRPORT REMARKS: Attended 1400-2300Z±. Crop dusting acft on and invof arpt. Rwy 18-36 NSTD LIRL, Rwy 18 thld lgts incorrectly spaced. All apron and twy pavement in poor condition with numerous cracks, loose aggregate, fod.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE STL.

MALDEN (L) VORTAC 111.2 MAW Chan 49 N36°33.31'
W89°54.69' 228° 6.5 NM to fld. 280/3E.



CAPE GIRARDEAU RGNL (CGI) 5 SW UTC-6(-5DT) N37°13.52' W89°34.25'

ST LOUIS
H-5D, L-16H
IAP, AD

342 B S4 FUEL 100LL, JET A OX 3 Class III, ARFF Index A NOTAM FILE CGI

RWY 10-28: H6499X150 (CONC-GRVD) S-93, D-125, 2S-159, 2D-215 HIRL

RWY 10: MALSR.

RWY 28: ODALS. VASI(V4L)—GA 3.0° TCH 38'. Tree.

RWY 02-20: H3996X100 (ASPH-CONC) S-45, D-60, 2D-100 MIRL

RWY 02: VASI(V4L)—GA 4.0° TCH 52'. Tree.

RWY 20: VASI(V4L)—GA 3.0° TCH 45'.

AIRPORT REMARKS: Attended Mon-Sat 1100-0400Z±, Sun 1200-0400Z±. For svc after hrs call 573-335-6631 Mon-Sat, 573-335-6632 Sun. Northern 100' Twy C not visible fm twr. As a Class III arpt, CLOSED to air carrier ops with more than 30 passenger seats. Ctc arpt manager 573-334-6230 for information. ACTIVATE MALSR Rwy 10 and ODALS Rwy 28—CTAF.

WEATHER DATA SOURCES: ASOS 120.55 (573) 335-3811.

COMMUNICATIONS: CTAF 125.525 UNICOM 122.95

RCO 122.1R 112.9T (ST LOUIS RADIO)

RCO 122.4 (ST LOUIS RADIO)

MEMPHIS CENTER APP/DEP CON 133.65

TOWER 125.525 (1300-2300Z±) GND CON 121.6

AIRSPACE: CLASS D svc 1300-2300Z± other times CLASS E.


RADIO AIDS TO NAVIGATION: NOTAM FILE CGI.

(L) VOR/DME 112.9 CGI Chan 76 N37°13.65' W89°34.34' at fld. 340/1E.

DUTCH NDB (LOM) 248 CG N37°15.21' W89°42.04' 103° 6.5 NM to fld.

ILS/DME 109.5 I-CGI Chan 32 Rwy 10 LOM DUTCH NDB. ILS unmonitored when twr clsd. LOC back course unusable byd 20° left of course.

COMM/NAV/WEATHER REMARKS: Cape Girardeau RCO frequency 121.5 unmonitored 0000-1200Z±.

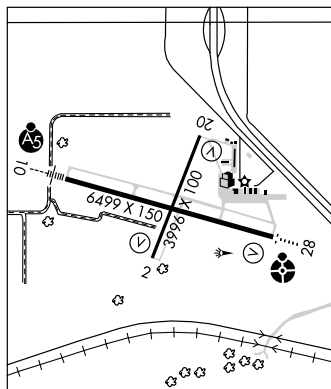

CAPT BEN SMITH AIRFIELD—MONROE CITY (See MONROE CITY)

CARDINAL N38°45.16' W90°21.65' NOTAM FILE STL

ST. LOUIS

(H)VOR/DME 116.45 CSX Chan 111(Y) at Lambert-St Louis Intl. 530/OE.

H-5D, L-27B, A

VOR/DME unusable 164°-234° byd 15 NM blo 3,000', 164°-234° byd 24NM blo 4,500'.

DME portion unusable:

027°-033° byd 30 NM blo 4,500'

164°-234° byd 15 NM blo 4,500'

041°-138° byd 25 NM blo 4,500'

300°-016° byd 33 NM blo 4,500'.

CARROLLTON MEM (K26) 3 S UTC-6(-5DT) N39°18.73' W93°30.39'

KANSAS CITY

670 B FUEL 100LL NOTAM FILE COU

RWY 18-36: H2600X50 (ASPH-AFSC) MIRL

RWY 18: Brush. RWY 36: P-line.

AIRPORT REMARKS: Unattended. Fuel self-serve fuel with credit card. Low level crops within 60' of rwy centerline.

MIRL Rwy 18-36 preset on low ints.

COMMUNICATIONS: CTAF 122.9

CARUTHERSVILLE MEM (M05) 1 SW UTC-6(-5DT) N36°10.15' W89°40.59'

ST LOUIS

268 B FUEL 100LL, JET A NOTAM FILE STL

RWY 18-36: H4005X75 (ASPH) MIRL

RWY 18: Trees. Rgt tfc. RWY 36: Trees.

AIRPORT REMARKS: Attended Mon-Fri 1400-2230Z+. 100LL fuel avbl 24 hrs. Crop dusting acct on and invof arpt. Rough ground in rwy safety area on sides and both ends of runway. ACTIVATE MIRL Rwy 18-36—CTAF.


COMMUNICATIONS: CTAF 122.9

MEMPHIS CENTER APP/DEP CON 134.65

RADIO AIDS TO NAVIGATION: NOTAM FILE DYR.

DYERSBURG (L) VORTACW 116.8 DYR Chan 115 N36°01.11'

W89°19.06' 294° 19.6 NM to fld. 380/3E. HIWAS.

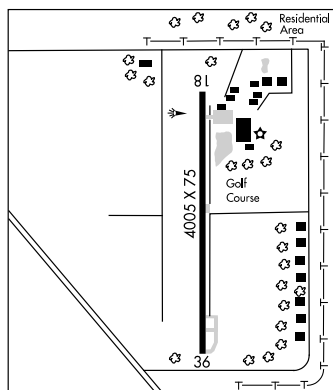

CASSVILLE MUNI (94K) 2 NW UTC-6(-5DT) N36°41.85' W93°54.03'

KANSAS CITY

1482 B S2 FUEL 100LL NOTAM FILE COU

RWY 09-27: H3600X60 (ASPH) S-8 MIRL 0.3% up W

RWY 09: Tree. RWY 27: P-line.

AIRPORT REMARKS: Unattended. 100LL self svc avbl with credit card only. For fuel call phone number on terminal building. ACTIVATE MIRL Rwy 09-27 —CTAF.


COMMUNICATIONS: CTAF 122.9

® SPRINGFIELD APP/DEP CON 124.95

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

NEOSHO (H) VOR/DME 117.3 EOS Chan 120 N36°50.55'

W94°26.14' 101° 27.2 NM to fld. 1200/7E.

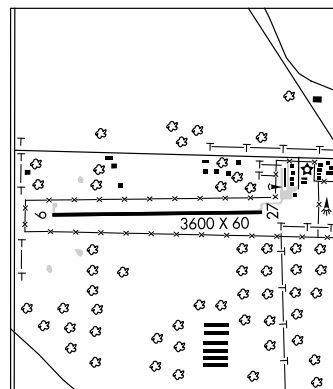

CHARLES B WHEELER DOWNTOWN (See KANSAS CITY)

CHARLESTON N36°50.70' W89°21.41' NOTAM FILE STL.

ST LOUIS

NDB (MHW) 208 CHQ at Mississippi Co.

L-16H

CHARLESTON**MISSISSIPPI CO** (CHQ) 4 S UTC-6(-5DT) N36°50.53' W89°21.58'

ST LOUIS

L-16H

IAP

313 B NOTAM FILE STL


RWY 18-36: H3196X60 (ASPH-AFSC) S-12.5 MIRL (NSTD)**RWY 18:** VASI(V2L)—GA 3.0° TCH 25'. Road.**RWY 36:** VASI(V2L)—GA 3.0° TCH 25'. Tree.

AIRPORT REMARKS: Attended irregularly. Parachute Jumping. Ultralight and crop dusting acft on and invof arpt. Crops within rwy primary surface and rwy safety area at Rwy 36 end. Rwy 18-36 numerous cracks with + 1-2 ft tall weeds on all edges of rwy pavement. Rwy 18-36 NSTD MIRL, 6 thld lgts Rwy 36. Thld lights located too close to rwy ends. No yellow edge lgts last 1600' Rwy 36. Rwy 18 and Rwy 36 VASI OTS indef. Rotating bcn OTS indef. MIRL Rwy 18-36 preset on med ints; to increase ints—CTAF.

COMMUNICATIONS: CTAF 122.9**MEMPHIS CENTER APP/DEP CON** 133.65**RADIO AIDS TO NAVIGATION:** NOTAM FILE PAH.

CUNNINGHAM (L) VORTACW 113.1 CNG Chan 78 N37°00.52'
W88°50.22' 246° 27.1 NM to fld. 480/3E.

CHARLESTON NDB (MHW) 208 CHQ N36°50.70' W89°21.41'
at fld. NOTAM FILE STL.

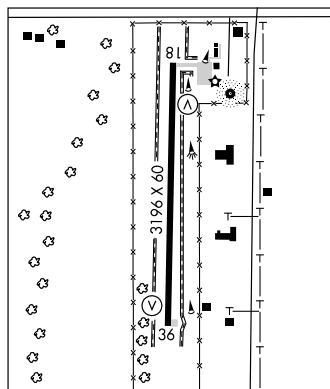**CHILLICOTHE MUNI** (CHT) 3 E UTC-6(-5DT) N39°46.92' W93°29.78'

KANSAS CITY

L-27A

IAP

783 B FUEL 100LL NOTAM FILE COU


RWY 14-32: H3899X75 (ASPH) S-15 MIRL 0.5% up NW**RWY 14:** Trees. **RWY 32:** PAPI(P4R)—GA 3.5° TCH 44'. Road.**RWY 02-20:** 3595X110 (TURF) 0.4% up NE**RWY 02:** Thld dsplcd 190'. Pole.**RWY 20:** Thld dsplcd 390'. Trees.

AIRPORT REMARKS: Attended Mon-Sat 1400-2300Z±, Sun 1900-2300Z±. Ultralight acft on and invof arpt. Wildlife and geese on and invof arpt. NSTD rwy safety area byd both ends of Rwy 02-20, incorrect terrain grades and crops. Rwy 14-32 restricted to acft 12,500 lbs maximum gross weight or less; PPR for acft exceeding 12,500 lbs call arpt manager on 660-646-5270. Rwy 02-20 surface rolling and uneven. Rwy 02-20 marked with large yellow cones. Dsplcd thlds marked with 3 large yellow cones on each side of rwy. ACTIVATE PAPI Rwy 32—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.175 (660) 646-0713.**COMMUNICATIONS:** CTAF/UNICOM 122.8**RCO** 122.25 (COLUMBIA RADIO)**KANSAS CITY CENTER APP/DEP CON** 125.25**RADIO AIDS TO NAVIGATION:** NOTAM FILE IRK.

KIRKSVILLE (H) VORTAC 114.6 IRK Chan 93 N40°08.10' W92°35.50' 237° 46.8 NM to fld.
985/6E. HIWAS.

NDB (MHW) 375 CHT N39°46.63' W93°29.65' at fld. NOTAM FILE COU.



CLINTON MEM (GLY) 4 E UTC-6(-5DT) N38°21.40' W93°41.05'

KANSAS CITY

822 B S3 FUEL 100LL, JET A NOTAM FILE COU

L-27A

RWY 04-22: H4001X60 (ASPH) S-12.5, D-16 MIRL

IAP

RWY 04: REIL. PAPI(P4L)—GA 3.5° TCH 39'. Trees.

RWY 22: REIL. PAPI(P4L)—GA 3.5° TCH 39'. Trees.

AIRPORT REMARKS: Attended May-Oct Wed-Mon 1400-0100Z†,

Nov-Apr Wed-Mon 1400-0000Z†. Fuel avbl 24 hrs. MIRL Rwy

04-22 dusk-0300Z†, after 0300Z† ACTIVATE MIRL Rwy

04-22—CTAF. ACTIVATE REIL Rwy 04 and Rwy 22, PAPI Rwy 04

and Rwy 22—CTAF. Bcn avbl after 0600Z† by prior request—Call

660-885-8889.

WEATHER DATA SOURCES: AWOS-3 120.475 (660) 885-3851.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.4 (COLUMBIA RADIO)

Ⓡ WHITEMAN APP/DEP CON 127.45 (Opr 24 hr from Mon 1300Z† thru Sat 0500Z†, Sat-Sun 1400-2300Z†, clsd holidays) other times ctc

Ⓡ KANSAS CITY CENTER APP/DEP CON 135.575

Ⓡ WHITEMAN DEP CON 125.925 (Opr 24 hr from Mon 1300Z† thru Sat 0500Z†, Sat-Sun 1400-2300Z†, clsd holidays) other times ctc

Ⓡ KANSAS CITY CENTER APP/DEP CON 135.575


RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

BUTLER (H) VORTAC 115.9 BUM Chan 106 N38°16.33'

W94°29.29' 075° 38.3 NM to fld. 890/7E.

HIWAS.

GOLDEN VALLEY NDB (MHW) 388 GLY N38°21.54' W93°41.08' at fld.

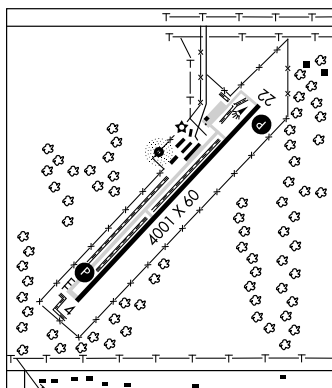**COLUMBIA RGNL** (COU) 10 SE UTC-6(-5DT) N38°49.09' W92°13.18'

KANSAS CITY

889 B S4 FUEL 100LL, JET A OX 2 ARFF Index—See Remarks NOTAM FILE COU

H-5D, L-27B

RWY 02-20: H6501X150 (CONC-GRVD) S-92, D-125, 2S-159, 2D-215 HIRL

IAP, AD

RWY 02: MALSR.

RWY 20: ODALS. REIL. VASI(V4L)—GA 3.0° TCH 39'.

RWY 13-31: H4401X75 (ASPH) S-24, D-24 MIRL

RWY 13: REIL. VASI(V2L)—GA 3.0° TCH 44'. Road.

RWY 31: REIL. VASI(V2L)—GA 3.15° TCH 33'.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 02	13-31	6050
RWY 13	02-20	3500

AIRPORT REMARKS: Attended continuously. Class I, ARFF Index A. 48 hrs

PPR for unscheduled air carrier ops with more than 30 passenger

seats, call safety officer (573) 817-5061 or (573) 817-5064.

ARFF Index B is provided. ARFF Index C level equipment avbl upon request with 48 hrs PPR call (573) 817-5061 or (573) 817-5064.

RVR touchdown Rwy 02 avbl. When twr clsd ACTIVATE HIRL Rwy

02-20 MIRL Rwy 13-31, MALSR Rwy 02 and ODALS Rwy

20—119.3.

WEATHER DATA SOURCES: ASOS (573) 499-1400. HIWAS 110.2 COU.

COMMUNICATIONS: CTAF 119.3 ATIS 128.45 UNICOM 122.95

RCO 122.65 122.2 (COLUMBIA RADIO)

Ⓡ MIZZU APP/DEP CON 124.375

TOWER 119.3 (1300-0300Z†) GND CON 121.6

AIRSPACE: CLASS D svc 1300-0300Z† other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.


HALLSVILLE (L) VORTAC 114.2 HLV Chan 89 N39°06.81' W92°07.69' 188° 18.2 NM to fld. 920/6E.

(L) VORW/DME 110.2 COU Chan 39 N38°48.65' W92°13.10' at fld. 883/3E. HIWAS.

ZODIA NDB (LOM) 407 CO N38°43.00' W92°16.10' 018° 6.5 NM to fld. Unmonitored when twr clsd.

ILS/DME 110.7 I-COU Chan 44 Rwy 02 LOM ZODIA NDB. LOM unmonitored when twr clsd. Back course unusable byd 10 NM below 3500'.

COMM/NAV/WEATHER REMARKS: Ctc Columbia Radio for airport advisory service on 119.3 when twr is clsd.

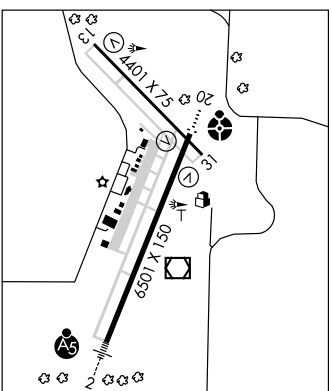**COOLE** N37°10.81' W93°25.03' NOTAM FILE SGF.

KANSAS CITY

NDB (LOM) 404 SG 016° 4.2 NM to Springfield-Branson Natl. Unmonitored.

COUNTY MEM (See NEW MADRID)

CREVE COEUR (See ST LOUIS)**CUBA MUNI** (UBX) 1 NW UTC-6(-5DT) N38°04.13' W91°25.73'

KANSAS CITY

1023 B S4 FUEL 100LL NOTAM FILE STL

L-16G

RWY 18-36: H3420X61 (ASPH) S-12.5 MIRL

RWY 18: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Tree.

RWY 36: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Trees.

AIRPORT REMARKS: Attended Sun 1830-2230Z†, Mon-Wed

1430-2230Z†, Fri-Sat 1430-2230Z†. Fuel avbl 24 hrs a day, call number posted at fueling area. Powerplant and airframe repairs

irregular schedule. Rwy 36 CLOSED to touch and go lds. Rwy 18 REIL OTS indef. Rwy 36 REIL OTS indef. MIRL Rwy 18-36 preset on low ints, to increase ints ACTIVATE REIL Rwy 18 and Rwy 36—CTAF.


COMMUNICATIONS: CTAF/UNICOM 122.8 UNICOM unmonitored.

KANSAS CITY CENTER APP/DEP CON 128.35

RADIO AIDS TO NAVIGATION: NOTAM FILE VIH.

VICHY (L) VOR/DME 117.7 VIH Chan 124 N38°09.25'

W91°42.41' 105° 14.1 NM to fld. 1110/6E.

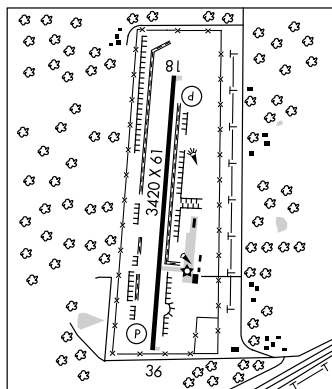**DEARBORN****TRIPLE R** (ØC1) 2 S UTC-6(-5DT) N39°29.27' W94°46.87'

KANSAS CITY

1000 S4 FUEL 100LL NOTAM FILE COU

RWY 02-20: 2375X35 (ASPH-TRTD) LIRL (NSTD)

RWY 02: Tower.

AIRPORT REMARKS: Attended irregularly. Call arpt manager to verify attendance. Rwy 02-20 pavement broken with loose rocks on rwy. NSTD rwy safety areas byd each rwy end, terrain grades and insufficient length and width.

Rwy 02-20 NSTD LIRL, and thld lgts; thld lgts not aligned with edge lgts. Thld lgts OTS indef. ACTIVATE LIRL Rwy 02-20—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.7**DEXTER MUNI** (DXE) 2 SE UTC-6(-5DT) N36°46.53' W89°56.48'

ST LOUIS

304 B S2 FUEL 100LL, JET A NOTAM FILE STL

H-6J, L-16H

RWY 18-36: H5000X100 (ASPH) S-30 MIRL

IAP

RWY 18: PAPI(P2L)—GA 3.0° TCH 40'. Trees.

RWY 36: PAPI(P2L)—GA 3.0° TCH 40'. Rgt tfc.


AIRPORT REMARKS: Attended irregularly. 24-hr automatic credit card for fuel. Ultralight activity on and invof arpt. Model airplane activity on and invof arpt. Crop dusting acct on and invof arpt. Rwy 18-36 various areas with cracks and grass and weeds growing in them. ACTIVATE MIRL Rwy 18-36 and PAPI Rwy 18 and Rwy 36—CTAF.**COMMUNICATIONS:** CTAF/UNICOM 122.8 UNICOM unmonitored.

MEMPHIS CENTER APP/DEP CON 133.65.

RADIO AIDS TO NAVIGATION: NOTAM FILE STL.

MALDEN (L) VORTAC 111.2 MAW Chan 49 N36°33.31'

W89°54.69' 351° 13.3 NM to fld. 280/3E.

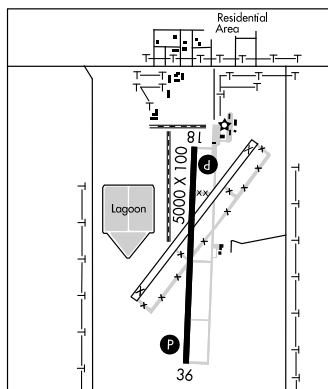**DOGWOOD** N37°01.41' W92°52.62' NOTAM FILE COU.

KANSAS CITY

(L) VORTAC 109.4 DGD Chan 31 102° 9.9 NM to Ava Bill Martin Mem. 1600/6E.

L-16G

RCO 122.1R 109.4T (COLUMBIA RADIO)

DONIPHAN MUNI (X33) 5 NNE UTC-6(-5DT) N36°41.63' W90°47.07'

ST LOUIS

635 S2 NOTAM FILE STL

RWY 07-25: H2560X57 (ASPH) LIRL

RWY 07: Thld dplcd 457'. Trees.

RWY 25: Trees. Rgt tfc.

AIRPORT REMARKS: Attended irregularly. Wildlife may be on rws morning and evening hrs. Rwy 07-25 width variance 57-60'. ACTIVATE LIRL Rwy 07-25—CTAF.

COMMUNICATIONS: CTAF 122.9 UNICOM 123.0 OTS indef.

DOTTE N39°13.25' W94°45.00' NOTAM FILE MCI.

KANSAS CITY

NDB (MHW/LOM) 359 DO 015° 4.9 NM to Kansas City Intl.

L-10J, A

DOWNTOWN (See SPRINGFIELD)

DOWNTOWN N39°07.40' W94°35.56'

KANSAS CITY

RC0 122.6 (COLUMBIA RADIO)

H-5C, L-10J, A

DUTCH N37°15.21' W89°42.04' NOTAM FILE CGI.

ST LOUIS

NDB (LOM) 248 CG 103° 6.5 NM to Cape Girardeau Rgnl.

EARLI N36°40.14' W90°19.70' NOTAM FILE POF.

ST LOUIS

NDB (MHW/LOM) 278 FD 359° 6.3 NM to Poplar Bluff Muni. Unmonitored.

L-16H

EAST KANSAS CITY (See GRAIN VALLEY)

EAVES N38°40.62' W90°32.86' NOTAM FILE SUS.

ST LOUIS

NDB (LOM) 227 FZ 258° 5.0 NM to Spirit of St Louis. Unmonitored.

EL DORADO SPRINGS MEM (87K) 2 SE UTC-6(-5DT) N37°51.43' W93°59.86'

KANSAS CITY

931 B NOTAM FILE COU

L-16F

RWY 04-22: H3295X50 (ASPH) MIRL

RWY 04: Trees.

RWY 22: Trees.

RWY 18-36: 2430X50 (TURF)

RWY 18: Trees.

RWY 36: Trees.

AIRPORT REMARKS: Attended continuously. Wildlife on and invof arpt.

Insufficient rwy safety area length byd each end of Rwy 18-36.

Trees within rwy safety area at each end of Rwy 18-36. ACTIVATE


MIRL Rwy 04-22—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

BUTLER (H) VORTAC 115.9 BUM Chan 106 N38°16.33'

W94°29.29' 130° 34.0 NM to fld. 890/7E. HIWAS.

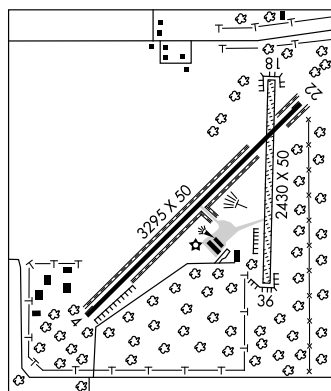

ELDON MODEL AIRPARK (H79) 1 NE UTC-6(-5DT) N38°21.64' W92°34.28'

KANSAS CITY

909 B FUEL 100LL NOTAM FILE COU

L-27A

RWY 18-36: H3300X75 (CONC) S-30 MIRL

RWY 18: REIL. Ground.

RWY 36: REIL. Trees. Rgt tfc.

AIRPORT REMARKS: Unattended. Automatic credit card fueling system 24 hrs a day. Geese and other wildlife on and invof arpt. Ultralights on and in vicinity of arpt. Rwy 18 REIL OTS indef. ACTIVATE MIRL Rwy 18-36 REIL Rwy 18 and Rwy 36—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

SUNSHINE (L) VOR/DME 108.4 SHY Chan 21 N38°02.44' W92°36.15' 359° 19.2 NM to fld. 910/5E.

ELTON HENSLEY MEM (See FULTON)**EMVILLE** N40°20.90' W94°54.93' NOTAM FILE COU.

OMAHA

NDB (MHW) 317 EVU at Northwest Missouri Rgnl. Unmonitored. Unusable byd 15 NM.

L-10J

EXCELSIOR SPRINGS MEM (3EX) 1 E UTC-6(-5DT) N39°20.23' W94°11.86'

KANSAS CITY

997 B NOTAM FILE COU

L-27A, A

RWY 01-19: H2000X47 (ASPH-AFSC) S-4 LIRL (NSTD)

IAP

RWY 01: Tree. RWY 19: Trees.

AIRPORT REMARKS: Attended 1600Z±-dusk. Wildlife on and invof arpt.


Rwy 01-19 isolated areas with grass and weeds growing in cracks. Insufficient rwy safety area at Rwy 01 end. Trees, brush, fence, NSTD grade, golf course. Rwy 19 rwy thld markings not 150' long, located too close to rwy end. Loose gravel length of twy. Rwy 01-19 NSTD LIRL; incorrect spacing of thld lgts.

COMMUNICATIONS: CTAF/UNICOM 122.7

Ⓡ KANSAS CITY APP/DEP CON 118.4

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

NAPOLEON (L) VORTACW 114.0 ANX Chan 87 N39°05.73' W94°07.73' 341° 14.9 NM to fld. 878/7E.

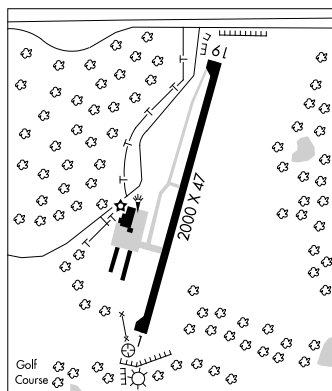**FARMINGTON** N37°40.41' W90°14.04' NOTAM FILE FAM.

ST LOUIS

(H) VORTAC 115.7 FAM Chan 104 299° 10.7 NM to Farmington Rgnl. 1220/1E. HIWAS.

H-5D, L-16H

HIWAS out of svc indefinitely.

RCO 122.1R 115.7T (ST LOUIS RADIO)

RCO 122.3 (ST LOUIS RADIO)

FARMINGTON RGNL (FAM) 1 S UTC-6(-5DT) N37°45.66' W90°25.72'

ST. LOUIS

946 B S4 FUEL 100LL, JET A NOTAM FILE FAM

L-16H

RWY 02-20: H4222X75 (CONC) S-30 MIRL 0.8% up N

IAP

RWY 02: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Thld dsplcd 223'.

Trees. Rgt tfc. RWY 20: Tree.

AIRPORT REMARKS: Attended 1330-2300Z±. Helicopter activity on and invof airfield. 100' x 75' full strength conc safety area southwest end, 590' by 16' asph safety area northeast end, not full strength. Crane unknown 50' AGL adjacent to apron. Rwy 02-20 restricted to acft 12,500 lbs maximum gross weight or less; PPR for acft exceeding 12,500 lbs call arpt manager on 573-756-4502. Rwy 02 560' overrun unusable. ACTIVATE MIRL Rwy 02-20 and REIL Rwy 02—CTAF. PAPI Rwy 02 on 24 hrs.

WEATHER DATA SOURCES: AWOS-3 119.275 (573) 756-6042. HIWAS 115.7 FAM.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.1R 115.7T (ST LOUIS RADIO)


RCO 122.3 (ST LOUIS RADIO)

KANSAS CITY CENTER APP/DEP CON 127.47

RADIO AIDS TO NAVIGATION: NOTAM FILE FAM.

(H) VORTAC 115.7 FAM Chan 104 N37°40.41' W90°14.04' 299° 10.6 NM to fld. 1220/1E. HIWAS.

PERRINE NDB (MHW) 367 PRI N37°45.84' W90°25.72' at fld. Unmonitored.

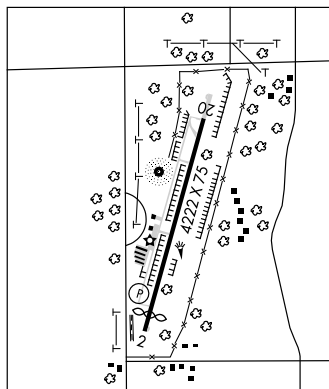

FESTUS MEM (FES) 2 S UTC-6(-5DT) N38°11.70' W90°23.13'

433 B S6 FUEL 100LL NOTAM FILE STL

RWY 18-36: H2202X49 (ASPH-AFSC) S-8 MIRL (NSTD)

RWY 18: SAVASI(S2L). Trees.

RWY 36: REIL. SAVASI(S2L). Trees.

AIRPORT REMARKS: Attended 1400-2300Z±. Fuel available 24 hr with credit card. NSTD rwy safety area byd each rwy end, Rwy 18 has large drop off 118' from rwy end, Rwy 36 has rolling and steep terrain. Rwy 18 NSTD npi markings, incorrect spacing of markings. Obstructed by grass and weeds. Rwy 36 NSTD npi markings, incorrect spacing of markings. Rwy 18-36 pavement has grass growing in cracks and loose aggregate. Rwy 18-36 NSTD MIRL; incorrect spacing of thld lgts and edge lgts in middle section of rwy. Rwy 18 VASI OTS indef. Rwy 36 VASI OTS indef. Rwy 36 REIL too close to rwy edge. ACTIVATE NSTD MIRL Rwy 18-36, REIL Rwy 36—CTAF. VASI Rwy 18 and Rwy 36 opr 24 hrs.

COMMUNICATIONS: CTAF/UNICOM 122.7

® **KANSAS CITY CENTER APP/DEP CON** 128.35


RADIO AIDS TO NAVIGATION: NOTAM FILE FAM.

FARMINGTON (H) VORTAC 115.7 FAM Chan 104 N37°40.41'

W90°14.04' 346° 32.1 NM to fld. 1220/1E. **HIWAS.**

NDB (MHW) 269 FES N38°11.75' W90°23.26' at fld.

NOTAM FILE STL. Monitored 1400-0200Z±, by prior arrangement with Multi-Aero Inc.

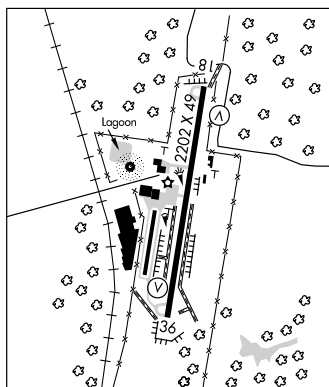

ST LOUIS

L-16H

IAP

FLOYD W JONES LEBANON (See LEBANON)

FLYING BAR H RANCH (See SPRINGFIELD)

FORISTELL N38°41.66' W90°58.27' NOTAM FILE STL.

(L) **VORTACW** 110.8 FTZ Chan 45 184° 6.5 NM to Washington Rgnl 818/5E.

ST LOUIS

H-5D, L-27B, A

FORNEY N37°44.55' W92°08.34' NOTAM FILE TBN.

(L) **VOR** 110.0 TBN at Waynesville ST. Robert Rgnl Forney Fld. VOR unmonitored Mon-Fri 0300-1200Z±, 24 hrs holidays and weekends.

KANSAS CITY

L-16G

FORT LEONARD WOOD**WAYNESVILLE—ST ROBERT RGNL FORNEY FLD**

(TBN)(KTBN) CIV/MIL

O SW

UTC-6(-5DT)

KANSAS CITY**H-5D, L-16G****IAP, AD**

N37°44.50' W92°08.44'

1159 B FUEL 100LL, JET A NOTAM FILE TBN

RWY 14-32: H6038X150 (ASPH) S-50 HIRL**RWY 14:** MALSR. REIL. VASI(V2L)—GA 2.9° TCH 36'.

Thld dsplcd 501'. Pole.

RWY 32: MALSR. REIL. VASI(V2R)—GA 2.9° TCH 36'.


Thld dsplcd 526'. Road. Rgt tfc.

MILITARY SERVICE: FUEL PPR rqr Mil JP8 avbl Mon-Fri 1230-2130Z†

except holidays, operating time for Code 6 and above. (NC-100LL, Jet A avbl 1400-2300Z† C573-329-4216.) 24 hr self svc with credit card.

AIRPORT REMARKS: Attended Mon-Fri 1200-0300Z† excluding holidays.


Rwy 32 touchdown rwy visual range avbl. Surface visibility limited by tree line from E to S to W. Rwy 14 MALSR OTS indef. When twr clsd ACTIVATE HIRL Rwy 14-32, MALSR and VASI and REIL Rwy 14 and MALSR, VASI and REIL Rwy 32—125.4.

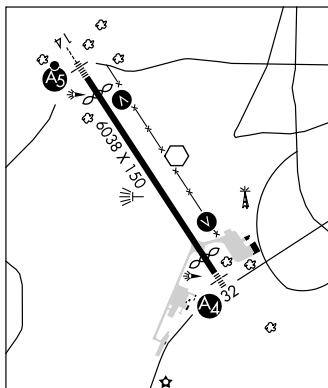MILITARY REMARKS: RSTD PPR for all transient military acft DSN581-0165/4819, C573-596-0165/4819. **MISC** Weather observer augmented, edited or manual as required Mon-Fri 1200-0300Z†, Sat 1300-2100Z†, Sun 1700-0100Z†. Weather forecast not avbl local. Remote briefing svc avbl 26 OWS Barksdale AFB DSN781-4775, C318-456-4775, C866-223-2398 (toll free), fax DSN 781-3493 or C318-456-3493, web site <https://ows.barksdale.af.mil/>.**WEATHER DATA SOURCES:** ASOS (C573) 596-6959.**COMMUNICATIONS:** CTAF 125.4 ATIS 118.7 229.4 (Mon-Fri 1200-0300Z† except holidays)**FORNEY TOWER** 125.4 268.7 (Mon-Fri 1200-0300Z† except holidays) **FORNEY OPS** 40.95 237.5**(R) KANSAS CITY CENTER APP/DEP CON** 128.35 284.67**AIRSPACE:** CLASS D svc Mon-Fri 1200-0300Z† except holidays other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE TBN.**FORNEY (LVOR** 110.0 TBN N37°44.55' W92°08.34' at fld. VOR unmonitored Mon-Fri 0300-1200Z†, 24 hrs holidays and weekends.**MAPLES (L) VORTAC** 113.4 MAP Chan 81 N37°35.45' W91°47.31' 292° 19.1 NM to fld. 1370/6E. **HIWAS.** NOTAM FILE COU.**BUCKHORN NDB (MH)** 391 BHN N37°41.85' W92°06.23' 323° 3.2 NM to fld. Unmonitored Mon-Fri 0300-1200Z†, 24 hrs holidays and weekends.**ILS/DME** 110.9 I-TBN Chan 46 Rwy 14. Unmonitored when twr clsd (Mon-Fri 1200-0300Z†, weekends and holidays.)**FREDERICKTOWN RGNL** (H88) 3 N UTC-6(-5DT) N37°36.35' W90°17.24'

880 B S3 FUEL 100LL, JET A, MOGAS NOTAM FILE STL

RWY 01-19: H4000X75 (ASPH) S-12.5 MIRL**RWY 01:** PAPI (P4L)—GA 3.0° TCH 40'.**RWY 19:** PAPI(P4L)—GA 3.0° TCH 42'. Trees.**AIRPORT REMARKS:** Attended Mon-Fri 1330-2200Z†. For svc after hrs call number posted on terminal door. Wildlife on and invof arpt.

ACTIVATE MIRL Rwy 01-19 and PAPI Rwy 01 and Rwy 19—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8**KANSAS CITY CENTER APP/DEP CON** 127.47**RADIO AIDS TO NAVIGATION:** NOTAM FILE FAM.**FARMINGTON (H) VORTAC** 115.7 FAM Chan 104 N37°40.41' W90°14.04' 211° 4.8 NM to fld. 1220/1E. **HIWAS.****ST LOUIS****L-16H****IAP**

FULTON

ELTON HENSLEY MEM (FTT) 3 SW UTC-6(-5DT) N38°50.29' W92°00.16'

KANSAS CITY

886 B S4 FUEL 100LL NOTAM FILE COU

RWY 18-36: H4000X75 (CONC) S-12.5 MIRL

RWY 18: REIL. PAPI(P4L)—GA 3.0° TCH 42'. Road.

RWY 36: REIL. PAPI(P4L)—GA 3.0° TCH 39'. Trees.

RWY 06-24: H3203X47 (ASPH) S-30 MIRL

RWY 06: REIL. SAVASI(S2L)—GA 3.9° TCH 19'. Tree.

RWY 24: REIL. SAVASI(S2L)—GA 3.9° TCH 19'. Road.

RWY 12-30: 2464X100 (TURF) 0.5% up NW

RWY 12: Tree. RWY 30: P-line.

AIRPORT REMARKS: Attended 1400Z-dusk. Parachute Jumping.

Ultralight activity on and in/ov arpt. Insufficient rwy safety area length byd Rwy 06 end, large drop off. Rwy 06-24 width variance 47-50'. Rwy 12-30 marked with large yellow cones. Rwy 18-36 limited by arpt manager to 12,500 pounds single wheel gear. For acft exceeding 12,500 pounds single wheel gear, ctc arpt manager on 573-642-6222. Rwy 24 VASI OTS indef. Rwy 18 and Rwy 36 PAPI OTS indef. REIL Rwy 06 and Rwy 24 OTS indef.

COMMUNICATIONS: CTAF/UNICOM 122.7

Ⓡ MIZZU APP/DEP CON 124.375


RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

COLUMBIA (L) VORW/DME 110.2 COU Chan 39 N38°48.65'

W92°13.10' 078° 10.2 NM to fld. 883/3E.

HALLSVILLE (L) VORTAC 114.2 HLV Chan 89 N38°48.65' W92°13.10' 154° 17.5 NM to fld. 920/6E.

GUTHRIE NDB (MHW) 317 FTT N38°50.57' W92°00.28' at fld. OTS indef. SHUTDOWN

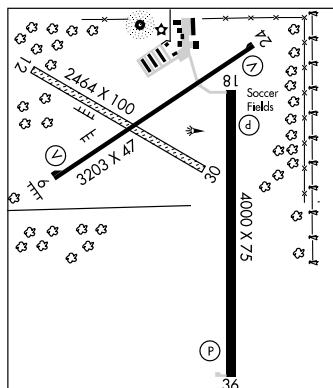

GAINESVILLE MEM (H27) 2 NE UTC-6(-5DT) N36°36.75' W92°23.99'

KANSAS CITY

1070 B NOTAM FILE COU

RWY 01-19: 1895X100 (TURF) LIRL

RWY 01: Thld dspcd 640'. Trees.

RWY 19: Thld dspcd 400'. Trees.

RWY 16-34: 1645X60 (TURF)

RWY 16: Thld dspcd 945'. Trees.

RWY 34: Thld dspcd 400'. Trees.

AIRPORT REMARKS: Unattended. Ultralight and crop dusting acft on and in/ov arpt. Rwy 01-19 and Rwy 16-34 marked with large yellow cones. Dspcd thlds marked with 3 large yellow cones on each side of rwy for Rwy 01-19.

Dspcd thld marked with 3 large yellow cones on west side for Rwy 16-34. All rwys have brush, trees, roads, buildings, utility poles and many other objects in apch areas and rwy safety areas. Very short roll out distances from dspcd thlds to rwy ends. Mobile home trailers and +4' metal fence posts along east rwy edge for the first half of Rwy 16-34. Rotating bcn located 3700' SW of Rwy 34 thld. Rwy 01-19 boundary lgts. Rwy 16-34 restricted to ldg ops only. ACTIVATE LIRL Rwy 01-19—CTAF.

COMMUNICATIONS: CTAF 122.9

GIDEON MEM (M85) 1 SE UTC-6(-5DT) N36°26.63' W89°54.23'

ST LOUIS

268 NOTAM FILE STL

RWY 15-33: H4504X58 (ASPH)

RWY 15: Pole. RWY 33: Road.

AIRPORT REMARKS: Unattended. Rwy N-S CLOSED, used for flying of model planes. North twy to Rwy 15 thld closed, S Twy N of Rwy 33 thld CLOSED. Crop dusting and ultralight acft on and in/ov arpt. Hazardous pavement conditions exist at this airport and farming operations are very close to pavement edges. Exercise caution when using this facility. Rwy 15-33 has areas of uneven asph where rwy is rolling and uneven, loose aggregate, and grass growing in cracks. Rwy 15 NSTD npi markings, centerline continous line. Rwy 33 NSTD basic markings centerline continous line. Rwy 15-33 width varies from 58-60'.


COMMUNICATIONS: CTAF 122.9

Ⓡ MEMPHIS CENTER APP/DEP CON 133.65

RADIO AIDS TO NAVIGATION: NOTAM FILE STL.

MALDEN (L) VORTAC 111.2 MAW Chan 49 N36°33.31'

W89°54.69' 174° 6.7 NM to fld. 280/3E.

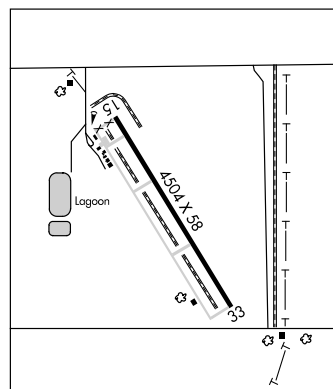

GOLDEN VALLEY N38°21.54' W93°41.08' NOTAM FILE COU
NDB (MHW) 388 GLY at Clinton Mem.

KANSAS CITY
L-27A

GOULD PETERSON MUNI (See TARKIO)

GRAIN VALLEY

EAST KANSAS CITY (3GV) 0 N UTC-6(-5DT) N39°00.93' W94°12.80'

KANSAS CITY
L-27A, A
IAP

835 B S2 FUEL 100LL, JET A NOTAM FILE COU

RWY 09-27: H4501X44 (ASPH-AFSC) S-11 RWY LGTS (NSTD)

RWY 09: REIL. VASI(V4L)—GA 3.5° TCH 46'. Thld dsplcd 300'.

Railroad. Rgt tfc.

RWY 27: VASI(V4L)—GA 3.5° TCH 46'. Railroad.

RWY 05-23: H2200X20 (ASPH) S-11 0.7% up NE

RWY 05: Railroad. **RWY 23:** Tree. Rgt tfc.


AIRPORT REMARKS: Attended 1400Z†-dusk. Numerous objects affecting navigable airspace around each rwy. Exercise caution when using this facility. NSTD rwy safety area lengths byd each rwy end. Insufficient lengths, incorrect terrain grades. No rwy safety area byd Rwy 27 and Rwy 05 ends. Migratory waterfowl on and invof arpt. Rwy 09-27 cracks with grass and weeds growing in them. Rwy 05-23 steep slope 60-235' NE of Rwy 05 thld. Rwy 05 and Rwy 23 NSTD npi markings; small numbers; no thld bars and incorrect size and spacing of centerline. Rwy 05 NSTD basic markings; small numbers; incorrect size and spacing of centerline. Rwy 05-23 width variance 20-25'. Rwy 09 NSTD dsplcd thld markings; small arrow head; incorrect spacing of arrows and thld bar. Rwy 09-27 NSTD precision instrument rwy markings; no aiming point; small rwy thld; touchdown and centerline markings and incorrect spacing. Rwy 09-27 NSTD MIRL; no yellow edge lgts last 2000' Rwy 09 and Rwy 27 all edge lgts located 13-15' from pavement edge; only 6 thld lgts Rwy 27 and located 18-20' East of thld. Rwy 09-27 width variance 44-45'. ACTIVATE MIRL Rwy 09-27, VASI Rwy 09 and Rwy 27, REIL Rwy 09—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

® KANSAS CITY APP/DEP CON 118.4 CLNC DEL 121.3

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

NAPOLEON (L) VORTACW 114.0 ANX Chan 87 N39°05.73' W94°07.73' 213° 6.2 NM to fld. 878/7E.

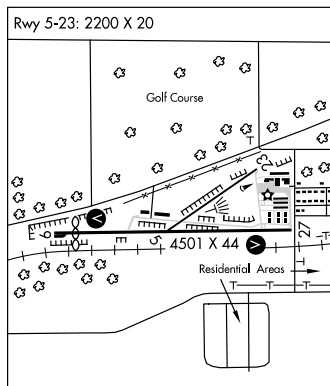

GRAND GLAIZE—OSAGE BEACH (See OSAGE BEACH)

GREENSFIELD (See MOSCOW MILLS)

GUTHRIE N38°50.57' W92°00.28' NOTAM FILE COU.

KANSAS CITY
L-27B

NDB (MHW) 317 FTT at Elton Hensley Mem. OTS indef. SHUTDOWN

HALLSVILLE N39°06.81' W92°07.69' NOTAM FILE COU.

KANSAS CITY
H-5D, L-27B

(L) VORTAC 114.2 HLV Chan 89 074° 14.7 NM to Mexico Mem. 920/6E.

RCO 122.1R 114.2T (COLUMBIA RADIO)

HANNIBAL RGNL (HAE) 4 NW UTC-6(-5DT) N39°43.51' W91°26.63'

KANSAS CITY

769 B S4 FUEL 100LL, JET A NOTAM FILE STL

L-27B

RWY 17-35: H4400X100 (CONC) S-12 MIRL

IAP

RWY 17: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Trees.

RWY 35: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Trees.

AIRPORT REMARKS: Attended 1400Z±-dusk. Maintain clear of hospital area when departing Rwy 17. ACTIVATE MIRL Rwy 17-35, REIL

Rwy 17 and Rwy 35, PAPI Rwy 17 and Rwy 35—CTAF.

WEATHER DATA SOURCES: AWOS-3 120.775 (573) 221-2584.

COMMUNICATIONS: CTAF/UNICOM 122.8

KANSAS CITY CENTER APP/DEP CON 135.525


RADIO AIDS TO NAVIGATION: NOTAM FILE UIN.

QUINCY (H) VORTAC 113.6 UIN Chan 83 N39°50.88'

W91°16.74' 221° 10.6 NM to fld. 710/5E. HIWAS.

NDB (MHW) 411 HAE N39°43.64' W91°26.91' at fld.

NOTAM FILE STL.



HARRISONVILLE

LAWRENCE SMITH MEM (LRY) 3 S UTC-6(-5DT) N38°36.61' W94°20.61'

KANSAS CITY

915 B FUEL 100LL NOTAM FILE COU

L-27A

RWY 17-35: H4000X75 (ASPH) S-12.5, MIRL 1.0% up N

IAP

RWY 17: PAPI(P4L)—GA 4.0° TCH 27'. Tree. Rgt tfc.

RWY 35: PAPI(P4L)—GA 3.0° TCH 25'. Tree.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 17: TORA-4000 TODA-4000 ASDA-4000 LDA-4000

RWY 35: TORA-4000 TODA-4000 ASDA-4000 LDA-4000

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z±, Sat-Sun irregularly. 24-hr self svc fuel. Be alert to parachute ops on and invof arpt. Air ambulance helicopter ops on and invof arpt.

Ultralights on and invof arpt. ACTIVATE MIRL Rwy 17-35 and PAPI Rwy 17 and Rwy 35—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.975 (816) 380-5936.


COMMUNICATIONS: CTAF/UNICOM 123.0

KANSAS CITY CENTER APP/DEP CON 125.55

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

BUTLER (H) VORTAC 115.9 BUM Chan 106 N38°16.33'

W94°29.29' 012° 21.4 NM to fld. 890/7E. HIWAS.



HARRY S TRUMAN DAM AND RESERVOIR SPB (See WARSAW)

HARRY S. TRUMAN RGNL (See BATES CITY)

HAYTI

MID CONTINENT (M28) 2 E UTC-6(-5DT) N36°13.46' W89°43.73'

ST LOUIS

268 S4 NOTAM FILE STL

RWY 18-36: 3420X175 (TURF)

RWY 18: Thld dsplcd 305'. Sign.

RWY 36: Thld dsplcd 80'. Road.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z±, Sat 1400-1800Z±. Crop dusting acft on and invof arpt. Farm road crosses middle of rwy. NSTD rwy safety area byd each rwy end, insufficient length, roads, and crops. Rwy 18-36 north 475' of rwy 155' wide. Rwy 18-36 625' by 20' asph 450' south of Rwy 18 thld 20' to 5' east of centerline. Rwy 18-36 white non-frangible reflectors mark edge of rwy, rwy ends not marked.

COMMUNICATIONS: CTAF 122.9

HERMANN MUNI (63M) 3 NW UTC-6(-5DT) N38°42.31' W91°29.43'

KANSAS CITY
L-27B

507 B NOTAM FILE STL

RWY 07-25: H3198X50 (ASPH) MIRL

RWY 25: PAPI(P2L)—GA 3.0° TCH 20'. P-line. Rgt tfc.

AIRPORT REMARKS: Unattended. Birds on and invof arpt. Be alert to large agricultural irrigation system during spring and summer months, approximately 300'-400' from Rwy 25 end. NSTD rwy safety area clearing beyond each rwy end, road and crops at Rwy 25 end, crops at Rwy 07 end. ACTIVATE MIRL Rwy 07-25 and PAPI Rwy 25—CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE STL.

FORISTELL (L) VORTACW 110.8 FTZ Chan 45 N38°41.66' W90°58.27' 267° 24.4 NM to fld. 818/5E.

HIGGINSVILLE INDUSTRIAL MUNI (HIG) 2 E UTC-6(-5DT) N39°04.35' W93°40.64'

KANSAS CITY
L-27A
IAP

840 B S4 FUEL 100LL NOTAM FILE COU

RWY 16-34: H4400X75 (ASPH) S-12.5, D-16 MIRL

1.0% up NW

RWY 16: REIL. PAPI(P4L)—GA 3.0° TCH 31'. Ground.

RWY 34: REIL. PAPI(P4L)—GA 3.0° TCH 39'. Tree.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 16: TORA-4400 TODA-4400 ASDA-4400 LDA-4400


RWY 34: TORA-4400 TODA-4400 ASDA-4400 LDA-4400

AIRPORT REMARKS: Attended Sep-Apr 1400-2300Z†, May-Aug 1300-0100Z†. For svc after hrs, call numbers posted on terminal door. Wildlife on and invof arpt. ACTIVATE MIRL RWY 16-34, PAPI Rwy 16 and Rwy 34, and REIL Rwy 16 and Rwy 34—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

NAPOLEON (L) VORTACW 114.0 ANX Chan 87 N39°05.73' W94°07.73' 087° 21.1 NM to fld. 878/7E.



HORNERSVILLE MEM (37M) 2 W UTC-6(-5DT) N36°02.46' W90°09.05'

ST LOUIS

248 B NOTAM FILE STL

RWY 18-36: H2648X47 (ASPH)

RWY 18: P-line. **RWY 36:** Trees.

AIRPORT REMARKS: Unattended. Rwy 18-36 daytime ops only. Night ops not recommended at this arpt. Be alert to large irrigation system on west side of rwy. Crop dusting operations on and invof arpt. Rwy 18-36 width variance 47-50'. Rotating beacon OTS indefinitely.

COMMUNICATIONS: CTAF 122.9

HOUSTON MEM (M48) 1 NW UTC-6(-5DT) N37°19.81' W91°58.39'

KANSAS CITY

1196 B S2 FUEL 100LL NOTAM FILE COU

L-166

RWY 16-34: H3500X60 (CONC) S-12.5 MIRL 0.8% up NW

RWY 16: REIL. PAPI(P2L)—GA 4.0° TCH 43'. Trees.


RWY 34: REIL. PAPI(P2L)—GA 4.0° TCH 39'. Trees.

AIRPORT REMARKS: Attended irregularly. For attendant from 1400-2300Z† call 417-967-3348, after 2300Z† call 417-967-4165. For fuel Mon-Fri call 417-967-3348; Sat-Sun and evenings call 417-967-4165. Wildlife on and in/ovf arpt. Crop dusting acft and ultralight activity on and in/ovf arpt. NSTD rotating bcn, lens not green and clear. MIRL Rwy 16-34 preset on low ints. ACTIVATE REIL Rwy 16 and Rwy 34—CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

MAPLES (L) VORTAC 113.4 MAP Chan 81 N37°35.45' W91°47.32' 204° 17.9 NM to fld. 1370/6E. HIWAS.



HUGGY N39°18.12' W94°51.07' NOTAM FILE UNO.

KANSAS CITY

NDB (LOM) 416 RN 087° 6.4 NM to Kansas City Intl. Unmonitored.

HUTTON N36°52.28' W91°54.00' NOTAM FILE UNO.

KANSAS CITY

(L) VORW/DME 111.6 HUW Chan 53 at West Plains Muni. 1220/2E.

L-166

JEFFERSON CITY MEM (JEF) 2 NE UTC-6(-5DT) N38°35.47' W92°09.37'

KANSAS CITY

549 B S4 FUEL 100LL, JET A NOTAM FILE JEF

H-5D, L-27B

RWY 12-30: H6001X100 (ASPH) S-45, D-58 HIRL

IAP, AD

RWY 12: REIL. VASI(V4L)—GA 3.5° TCH 55'. Tree.

RWY 30: MALSR. VASI(V4L)—GA 3.0° TCH 50'.

RWY 09-27: H3401X75 (CONC) S-30, D-38 MIRL

RWY 09: REIL. PAPI(P4L)—GA 3.0° TCH 25'. Tree.

RWY 27: REIL. PAPI(P4L)—GA 3.0° TCH 43'. Tree.

AIRPORT REMARKS: Attended 1230-0230Z†. Light to moderate bird activity in/ovf arpt. Entrances to E and S hangers, not visible by twr. Twy A1, A2 connectors open. Rwy 27 REIL OTS indef. REIL Rwy 12 unavbl when twr clsd. When twr clsd ACTIVATE HIRL Rwy 12-30, VASI Rwy 12 and Rwy 30 and MALSR Rwy 30 and Twy A lgts—CTAF.

WEATHER DATA SOURCES: ASOS 133.625 (573) 635-9266.

COMMUNICATIONS: CTAF 125.6 UNICOM 122.95

RCO 122.25 (COLUMBIA RADIO)

® MIZZU APP/DEP CON 124.375

TOWER 125.6 (1200-0330Z†) GND CON 121.7

AIRSPACE: CLASS D svc 1200-0330Z† other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

COLUMBIA (L) VORW/DME 110.2 COU Chan 39 N38°48.65'


W92°13.10' 164° 13.5 NM to fld. 883/3E. HIWAS.

NOAH NDB (MHW) 515 ONH N38°38.23' W92°14.69' 120° 5.0 NM to fld. NOTAM FILE JEF.

ALGOA NDB (MHW/LOM) 397 JE N38°32.89' W92°04.32' 300° 4.7 NM to fld. NOTAM FILE JEF.

ILS/DME 110.5 I-JEF Chan 42 Rwy 30. Class IE. LOM ALGOA NDB. Unmonitored when twr clsd.

Back course marker co-located with NDB ONH.



JERRY SUMNERS SR AURORA MUNI (See AURORA)

JESSE VIERTEL MEM (See BOONVILLE)

JOPLIN RGNL (JLN) 4 N UTC-6(-5DT) N37°09.11' W94°29.90'

KANSAS CITY

981 B S4 FUEL 100LL, JET A OX 2 Class II, ARFF Index A NOTAM FILE JLN

H-61, L-16F

RWY 13-31: H6502X150 (ASPH-GRVD) S-80, D-105, 2S-133, 2D-170 HIRL 0.5% up SE

IAP, AD

RWY 13: MALSF. Thld dspcd 387'. Tree.

RWY 31: ODALS. PAPI(P4L)—GA 3.0° TCH 47'. Thld dspcd 300'. Tree.

RWY 18-36: H6500X100 (ASPH) S-30, D-60 HIRL 0.3% up S

RWY 18: MALSR. PAPI(P4L)—GA 3.0° TCH 45'. Pole.

RWY 36: PAPI(P4L)—GA 3.0° TCH 45'.

RWY 05-23: H3604X75 (ASPH) S-20 MIRL

RWY 05: Tree. RWY 23: Tree.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 13	18-36	3250
RWY 18	13-31	4900

RUNWAY DECLARED DISTANCE INFORMATION

RWY 13: TORA-6502 TODA-6502 ASDA-6102 LDA-5802

RWY 31: TORA-6502 TODA-6502 ASDA-6102 LDA-5802

AIRPORT REMARKS: Attended 1100-0600Z. Birds on and invof arpt, spring and fall. PPR 48 hrs for acft carrying hazardous or explosive cargo. PPR 48 hrs for unscheduled air carrier ops with more than 30 passenger seats call arpt manager 417-623-0262. When twr clsd ACTIVATE MIRL Rwy 05-23, HIRL Rwy 13-31 and Rwy 18-36, MALSR Rwy 18, and MALSF Rwy 13, PAPI Rwy 18 and Rwy 36, PAPI and ODALS Rwy 31—CTAF.

WEATHER DATA SOURCES: ASOS (417)623-8892. LAWRS.

COMMUNICATIONS: CTAF 119.8 ATIS 120.85 UNICOM 122.95

RCO 122.6 (COLUMBIA RADIO)

KANSAS CITY CENTER APP/DEP CON 128.6

TOWER 119.8 (1200-0300Z) GND CON 121.6

AIRSPACE: CLASS D svc 1200-0300Z other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.


NEOSHO (H) VOR/DME 117.3 EOS Chan 120 N36°50.55' W94°26.14' 344° 18.8 NM to fld. 1200/7E.

LUNNS NDB (LOM) 344 JL N37°12.19' W94°33.51' 133° 4.2 NM to fld. Unmonitored.

ILS 110.3 I-JLN Rwy 13 LOM LUNNS NDB. Outer marker unmonitored.

ILS/DME 108.9 I-JQX Chan 26 Rwy 18. Class IE. LOC unusable byd 25° W of course blo 2800'. ILS unmonitored 0300-1200Z.

COMM/NAV/WEATHER REMARKS: Freq 121.5 not avbl at twr.



KAHOKA MUNI (ØH7) 1 E UTC-6(-5DT) N40°25.30' W91°42.40'

CHICAGO

700 NOTAM FILE COU

RWY 10-28: 2680X115 (TURF)

RWY 10: Thld dspcd 318' Road. RWY 28: Road.

AIRPORT REMARKS: Unattended. Numerous tall objects within transitional surface along the entire south edge of Rwy 10-28. Rwy 10-28 soft after heavy rains. Call 660-727-3711 for rwy conditions. Use caution during spring and summer months due to farm irrigation system along north rwy edge. Rwy 10-28 from E thld to 800' W of S edge rwy is 1'-2' higher than N edge. Dspcd thld marked with three large yellow cones on each side of rwy.

COMMUNICATIONS: CTAF 122.9

KAISER N38°05.80' W92°33.19' NOTAM FILE COU.

KANSAS CITY

NDB (MHW) 377 AIZ at Lee C Fine Mem. Unmonitored 0100-1300Z. SHUTDOWN

L-16G

KAISER (LAKE OZARK)**LEE C FINE MEM** (AIZ) 3 SE UTC-6(-5DT) N38°05.76' W92°32.97'

869 B FUEL 100LL JET A NOTAM FILE AIZ

RWY 03-21: H6497X100 (ASPH-AFSC) S-55, D-70, 2S-89, 2D-215 MIRL**RWY 03:** VASI(V4L)—GA 3.0° TCH 55'. Trees.**RWY 21:** VASI(V4L)—GA 3.0° TCH 42'. Trees.


AIRPORT REMARKS: Attended Oct-Apr 1400-0000Z†, May-Sep Mon-Wed 1400-0000Z†. Thu-Sun 1400-0200Z†. Birds on and in/ov arpt. Arpt in state park. Rwy 03-21 various areas with grass and weeds growing in cracks. Banner towing on weekends from May-Sep. Parallel twy and Rwy 21 turnaround limited to acft weighing only 12,500 lbs or less. Acft over 12,500 lbs use Twys B and C only. ACTIVATE MIRL Rwy 03-21 and VASI Rwy 03 and Rwy 21—CTAF.

WEATHER DATA SOURCES: AWOS-3 135.325 (573) 348-0847.**COMMUNICATIONS:** CTAF/UNICOM 122.8® **MIZZU APP/DEP CON** 124.1**RADIO AIDS TO NAVIGATION:** NOTAM FILE COU.

SUNSHINE (L) VORW/DME 108.4 SHY Chan 21 N38°02.44' W92°36.15' 032° 4.2 NM to fld. 910/5E.

KAISER NDB (MHW) 377 AIZ N38°05.80' W92°33.19' at fld.
Unmonitored 0100-1300Z†. SHUTDOWN

ILS/DME 111.5 I-AIZ Chan 21 Rwy 21 LOC only LOC
unmonitored 0100-1300Z†.

**KANSAS CITY**

H-5D, L-16G

IAP, AD

KANSAS CITY N39°17.12' W94°44.22' NOTAM FILE MCI.(H) **VORTAC** 113.25 MCI Chan 79Y 051° 1.3 NM to Kansas City Intl. 1017/5E.**RCO** 122.65 122.1R, 113.25T (COLUMBIA RADIO)**KANSAS CITY**

H-5C, L-10J, A

KANSAS CITY**CHARLES B. WHEELER DOWNTOWN**

(MKC) 0 NW UTC-6(-5DT) N39°07.39' W94°35.57'

KANSAS CITY

759 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 LRA Class IV, ARFF Index A

H-5C, L-10J, A

NOTAM FILE MKC

IAP, AD**Rwy 01-19:** H7101X150 (CONC) S-86, D-171, 2S-175, 2D-342
HIRL**Rwy 01:** REIL. VASI(V4L)—GA 3.7° TCH 66'. Thld dspcd 300'. Tree.**Rwy 19:** MALSF. VASI(V4L)—GA 3.0° TCH 46'. Thld dspcd 200'.
Road.**Rwy 03-21:** H5050X100 (ASPH-GRVD) S-48, D-73, 2S-93,
2D-136 HIRL.**Rwy 03:** VASI(V4L)—GA 3.0° TCH 50'. Thld dspcd 500'. Levee.**Rwy 21:** REIL. VASI(V4L)—GA 3.3° TCH 57'. Thld dspcd 699'. Railroad.**LAND AND HOLD SHORT OPERATIONS**

LANDING	HOLD SHORT POINT	DIST AVBL
Rwy 19	03-21	3850

RUNWAY DECLARED DISTANCE INFORMATION


Rwy 01: TORA-7101	TODA-7101	ASDA-6101	LDA-5801
Rwy 03: TORA-5050	TODA-5050	ASDA-5050	LDA-4550
Rwy 19: TORA-7101	TODA-7101	ASDA-7101	LDA-6901
Rwy 21: TORA-5050	TODA-5050	ASDA-5050	LDA-4351

ARRESTING GEAR/SYSTEM**Rwy 19:** EMAS

AIRPORT REMARKS: Attended continuously. 100LL self svc avbl 24 hrs with credit card only. Waterfowl on and invof arpt. Flocks of pigeons invof departure end of Rwy 03. Crane 98' AGL 3300' S AER Twy 3 daylight hrs Mon-Fri. Category C/D operations not allowed Rwy 03-21. Arpt CLOSED to air carrier ops with more than 30 passenger seats except 24 hr PPR call arpt manager 816-513-0800. Air carrier ops not authorized in excess of 15 minutes before or after scheduled arrival or departure times without prior coordination with arpt manager confirming ARFF avbl prior to landing or takeoff. VFR E traffic pattern Rwy 03-21: departing Rwy 03 right traffic attain traffic pattern altitude prior to turning crosswind. Landing Rwy 21 maintain traffic pattern altitude until passing N of Missouri river. Sun glare may interfere with sign and pavement markings on E/W twys. Twr has ltd visibility of T-hanger aprons N of Twy D and W of Twy L. Aprons at hangar 6A clsd to air carrier ops. Flight Notification Service (ADCUS) avbl.

WEATHER DATA SOURCES: ASOS (816) 471-2549. LAWRS.**COMMUNICATIONS:** ATIS 120.75 (816) 329-2850 **UNICOM** 122.95**RCO** 122.65 (COLUMBIA RADIO)**RCO** 122.1R 113.25T (COLUMBIA RADIO)**DOWNTOWN RCO** 122.6 (COLUMBIA RADIO)® **KANSAS CITY APP/DEP CON** 118.4**DOWNTOWN TOWER** 133.3 **GND CON** 121.9 **CLNC DEL** 121.9 **PRE-TAXI CLNC** 121.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE MKC.**RIVERSIDE (T) VORW/DME** 111.4 **RIS** Chan 51 N39°07.22' W94°35.80' at fld. 740/5E.**KENZY NDB (LOM)** 344 **MK** N39°13.25' W94°33.86' 188° 6.0 NM to fld.**ILS** 109.9 **I-MKC** Rwy 19 Class IE. **LOM KENZY NDB.****ILS** 111.75 **I-GQR** Rwy 03

COMM/NAV/WEATHER REMARKS: Interference from FM radio station may affect communication in the immediate vicinity of arpt. Freq 121.5 not avbl at twr or FSS.



KANSAS CITY INTL (MCI) 15 NW UTC-6(-5DT) N39°17.86' W94°42.84'

KANSAS CITY

1026 B **FUEL** 100LL, JET A LRA Class I, ARFF Index C NOTAM FILE MCI

H-5C, L-10J, A

RWY 01L-19R: H10801X150 (CONC-GRVD) S-75, D-204, 2S-175, 2D-400, 2D/2D2-450

HIRL CL IAP, AD

RWY 01L: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 71'. 0.3% down.

RWY 19R: ALSF2. TDZL. PAPI(P4R)—GA 3.0° TCH 69'. Rgt ttc.

0.3% up.

RWY 01R-19L: H9500X150 (CONC-GRVD) S-75, D-204, 2S-175,

2D-400, 2D/2D2-450 HIRL CL

RWY 01R: ALSF2. TDZL. PAPI(P4R)—GA 3.0° TCH 74'.

RWY 19L: MALSR. TDZL. 0.6% up.

RWY 09-27: H9500X150 (ASPH-GRVD) S-75, D-125, 2S-159,

2D-180, 2D/2D2-260 HIRL

RWY 09: MALSR.

RWY 27: MALSR. PAPI(P4L)—GA 3.0° TCH 72'. Rgt ttc.

AIRPORT REMARKS: Attended continuously. CTL twr has limited visibility on numerous gates at all 3 terminals. Waterfowl on and in/ov arpt.

Coyote on and in/ov arpt. Windshear alert system on arpt.

Pushback clearance required at gates 45 thru 52 in terminal B

and gates 72, 73 and 76 in terminal C, pushback from these

gates enters Twy D. Noise abatement procedures in effect

0400-1200Z† with landing on Rwy 01L and 19L; takeoffs on

Rwys 01R and 19R. When using hi-speed exits C5 and C6

continue until first parallel twy and use extreme caution when turning in excess of 90 degrees. PPR to park at

airline gates ctc respective airline. No acft parking on postal apron. Flight Notification Service (ADCUS) avbl at

gate 90. Military acft may be charged ramp/parking fees. NOTE: See Special Notices—Continuous Power

Facilities.

WEATHER DATA SOURCES: ASOS (816) 243-6415. HIWAS 113.25 MCI. LLWAS.

COMMUNICATIONS: D-ATIS 128.375 (816) 329-2725 **UNICOM** 122.95

RCO 122.65 122.1R 113.25T (COLUMBIA RADIO)

Ⓡ **APP CON** 120.95

INTERNATIONAL TOWER 128.2 125.75 **GND CON** 121.8 121.65 **CLNC DEL** 135.7

Ⓡ **DEP CON** 124.7 (191°-009°) 123.95 (010°-190°)

AIRSPACE: CLASS B See VFR Terminal Area Chart.

RADIO AIDS TO NAVIGATION: NOTAM FILE MCI.

(H) **VORTAC** 113.25 MCI Chan 79Y N39°17.12' W94°44.22' 051° 1.3 NM 1017/5E. **HIWAS.**

DOTTE NDB (MHW/LOM) 359 DO N39°13.25' W94°45.00' 015° 4.9 NM to fld.

HUGGY NDB (LOM) 416 RN N39°18.12' W94°51.07' 087° 6.4 NM to fld. Unmonitored.

LEXEY NDB (LOM) 275 DY N39°23.22' W94°40.62' 193° 5.6 NM to fld.

ILS/DME 109.7 I-RNI Chan 34 Rwy 09. Class IB. LOM HUGGY NDB. LOM unmonitored.


ILS/DME 110.75 I-PVL Chan 44(Y) Rwy 01R. Class IIIE.

ILS 110.5 I-DOT Rwy 01L. LOM DOTTE NDB.

ILS/DME 109.1 I-PAJ Chan 28 Rwy 19R. Class IIIE.

ILS 109.55 I-DYH Rwy 19L. Class IE. LOM LEXEY NDB.

ILS/DME 109.7 I-UQY Chan 34 Rwy 27. Class IE. LOC only.



KENNETT MEM (TKX) 1 SE UTC-6(-5DT) N36°13.55' W90°02.20'

262 B S4 FUEL 100LL JET A NOTAM FILE STL

RWY 02-20: H5000X75 (CONC) MIRL

RWY 02: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Tree. Rgt tfc.

RWY 20: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Trees.

RWY 18-36: H3012X75 (ASPH) S-10 MIRL (NSTD)

RWY 18: Tree. RWY 36: REIL. Trees.

AIRPORT REMARKS: Attended Mon-Sat 1400-2300Z†, Sun

1900-2300Z†. Rwy 18-36 NSTD MIRL, incorrect spacing of Rwy

36 thld lghts. NSTD REIL Rwy 36, too close to rwy edge. MIRL Rwy

18-36 OTS indef. MIRL Rwy 18-36 and Rwy 02-20 on low ints

dusk-0900Z†, to incr ints and ACTIVATE MIRL Rwy 18-36 and

Rwy 02-20 and REIL Rwy 02, Rwy 20 and Rwy 36 from

0500Z†-dawn—CTAF. PAPI Rwy 02 and Rwy 20 on 24 hrs.


COMMUNICATIONS: CTAF/UNICOM 122.8

MEMPHIS CENTER APP/DEP CON 120.075

RADIO AIDS TO NAVIGATION: NOTAM FILE STL.

MALDEN (L) VORTAC 111.2 MAW Chan 49 N36°33.31'

W89°54.69' 194° 20.6 NM to fld. 280/3E.



KENZY N39°13.25' W94°33.86' NOTAM FILE MKC.

NDB (LOM) 344 MK 188° 6.0 NM to Charles B. Wheeler Downtown.

KANSAS CITY

A

KIRKSVILLE RGNL (IRK) 6 SE UTC-6(-5DT) N40°05.61' W92°32.70'

966 B S4 FUEL 100LL JET A Class III, ARFF Index A NOTAM FILE IRK

RWY 18-36: H6005X100 (CONC) S-30, D-48, 2D-85 MIRL

RWY 18: REIL. VASI(V4L)—GA 3.0° TCH 33'. Tree.

RWY 36: MALSR. VASI(V4L)—GA 3.0° TCH 54'.

RWY 09-27: 1393X100 (TURF)

RWY 09: Trees.

RWY 27: Trees.

AIRPORT REMARKS: Attended 1130-0200Z†. 24 hr self-serve credit card

for fuel (100LL only). Rwy 09-27 marked with yellow cones.

ACTIVATE MIRL Rwy 18-36, VASI Rwy 18 and Rwy 36, REIL Rwy

18, and MALSR Rwy 36—CTAF.

WEATHER DATA SOURCES: ASOS 121.125 (660) 665-9153. HIWAS 114.6

IRK.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.2 122.1R 114.6T (COLUMBIA RADIO)

® KANSAS CITY CENTER APP/DEP CON 132.6


AIRSPACE: CLASS E svc 1300-0300Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE IRK.

(H) VORTAC 114.6 IRK Chan 93 N40°08.10' W92°35.50'

133° 3.3 NM to fld. 985/6E. HIWAS.

ILS/DME 111.5 I-IRK Chan 52 Rwy 36. Class IE.



CHICAGO

H-5D, L-27A

IAP, AD

LAMAR MUNI (LLU) 2 SW UTC-6(-5DT) N37°29.37' W94°18.69'

KANSAS CITY

1009 B FUEL 100LL, MOGAS NOTAM FILE COU

L-16F

RWY 03-21: H2902X60 (ASPH-AFSC) MIRL 0.4% up SW

IAP

RWY 03: P-line. RWY 21: Trees.

AIRPORT REMARKS: Unattended. For fuel etc number posted at fueling area. Ultralgt activity on and in vicinity of arpt. ACTIVATE MIRL Rwy 03-21—CTAF.

COMMUNICATIONS: CTAF 122.9


KANSAS CITY CENTER APP/DEP CON 128.6

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

NEOSHO (H) VOR/DME 117.3 EOS Chan 120 N36°50.55'

W94°26.14' 002° 39.2 NM to fld. 1200/7E.

SPRING RIVER NDB (MHW) 356 LLU N37°29.22' W94°18.61' at fld.

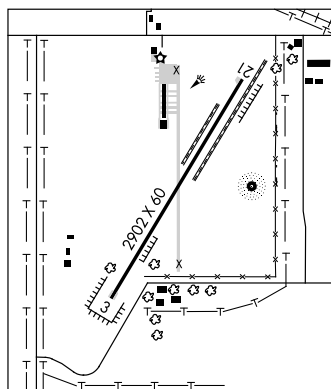

LAMBERT-ST LOUIS INTL (See ST LOUIS)

LAWRENCE SMITH MEM (See HARRISONVILLE)

LEBANON N37°34.28' W92°39.47'. NOTAM FILE COU.

KANSAS CITY

NDB (MHW) 414 IEB 360° 4.6 NM to Floyd W Jones Lebanon. Unmonitored.

L-16G

RCO 122.5 (COLUMBIA RADIO)

LEBANON

FLOYD W JONES LEBANON (LBO) 3 S UTC-6(-5DT) N37°38.90' W92°39.15'

KANSAS CITY

1321 B FUEL 100LL, JET A1+ NOTAM FILE COU

H-5D, L-16G

RWY 18-36: H5000X75 (ASPH) S-33, D-54 MIRL 0.3% up S

IAP

RWY 18: PVASI(P SIL)—GA 3.0° TCH 37'. Trees.

RWY 36: REIL. PVASI(P SIL)—GA 3.0° TCH 27'. Pline.

AIRPORT REMARKS: Attended 1300-0000Z+. For fuel after hrs, call number posted on terminal door. Birds, deer and wildlife on and in vicinity of arpt. Sprayer acft on and in vicinity of arpt during spring and summer months. Rwy 18 PVASI OTS indef. MIRL Rwy 18-36 preset low ints, to increase ints and ACTIVATE REIL Rwy 36—CTAF. PVASI Rwy 18 and Rwy 36 operate 24 hrs.

WEATHER DATA SOURCES: AWOS-3 118.975 (417) 533-3419.

COMMUNICATIONS: CTAF/UNICOM 122.8

LEBANON RCO 122.5 (COLUMBIA RADIO)

® SPRINGFIELD APP/DEP CON 121.1 CLNC DEL 123.725

RADIO AIDS TO NAVIGATION: NOTAM FILE SGF.


SPRINGFIELD (H) VORTAC 116.9 SGF Chan 116 N37°21.36'

W93°20.04' 057° 37 NM to fld. 1240/4E. HIWAS.

LEBANON NDB (MHW) 414 IEB N37°34.28' W92°39.47' 360°

4.6 NM to fld. NOTAM FILE COU. Unmonitored.

SDF/DME 109.1 I-LBO Chan 28 Rwy 36 Unmonitored.



LEE C FINE MEM (See KAISER (LAKE OZARK))

LEE'S SUMMIT MUNI (LXT) 3 N UTC-6(-5DT) N38°57.58' W94°22.28'

KANSAS CITY

1004 B S4 FUEL 100LL, JET A, MOGAS OX 4 TPA—See Remarks NOTAM FILE LXT

L-10J, A

RWY 18-36: H4016X75 (CONC) S-30, D-30 MIRL

IAP, AD

RWY 18: REIL. VASI(V4L)—GA 3.5° TCH 31'.

RWY 36: REIL. VASI(V4L)—GA 3.5° TCH 31'. Rgt tfc.

RWY 11-29: H3800X75 (CONC) S-30, D-30 MIRL

RWY 11: REIL. PAPI(P4L)—GA 3.0° TCH 45'. Rgt tfc.

RWY 29: REIL. PAPI(P4R)—GA 3.0° TCH 40'.

AIRPORT REMARKS: Attended 1130Z†-dusk; attended 1 hr after sunset. Wildlife on and in/ovf arpt. When winds are less than 5 knots use Rwy 18. Apxh ends of Rwy 18, Rwy 36 and Rwy 29 are not mutually visible due to terrain and trees. No rgt turns under 2500' or within 3 miles of the arpt when departing on Rwy 29. No left turns under 1500' or within ½ mile of the end of the rwy when departing on Rwy 18. No left turns under 2500' or within 3 miles of the arpt departing on Rwy 36. For acft under 6,000 lbs TPA 1804(800); acft over 6,000 lbs TPA 2504(1500). MIRL Rwy 11-29 and Rwy 18-36 preset on low ints dusk-0400Z†, for higher ints after 0400Z† ACTIVATE—CTAF. For REIL Rwy 18, Rwy 36, Rwy 11 and Rwy 29—CTAF. PAPI Rwy 11 and Rwy 29 and VASI Rwy 18 and Rwy 36 on continuously.


WEATHER DATA SOURCES: ASOS 124.175 (816) 347-9807.

COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ KANSAS CITY APP/DEP CON 118.4 CLNC DEL 118.45

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

NAPOLEON (L) VORTACW 114.0 ANX Chan 87 N39°05.73' W94°07.73' 227° 14.0 NM to fld. 878/7E.



LEWIS CO RGNL (See MONTICELLO)

LEXEY N39°23.22' W94°40.62' NOTAM FILE MCI.

KANSAS CITY

NDB (LOM) 275 DY 193° 5.6 NM to Kansas City Intl.

A

LEXINGTON MUNI (4K3) 3 NW UTC-6(-5DT) N39°12.59' W93°55.66'

KANSAS CITY

691 B NOTAM FILE COU

L-27A

RWY 13-31: 3100X125 (TURF)

IAP

RWY 13: P-line. RWY 31: Road.

RWY 04-22: H2925X40 (ASPH) LIRL (NSTD)

RWY 04: P-line. RWY 22: Trees.

RWY 18-36: 2250X125 (TURF)

RWY 18: Trees. RWY 36: Road.


AIRPORT REMARKS: Attended Mon-Fri 1500Z†-dusk, Sat-Sun 1400Z†-dusk. Parachute Jumping. Birds in/ovf arpt during spring rains and flooding. Ultralight activity and radio controlled airplanes on and in/ovf arpt. Trees in rwy visibility zone between Rwy 22 end and Rwy 13 end. NSTD rwy safety area byd Rwy 22, Rwy 13, Rwy 18, and Rwy 31 ends, incorrect terrain grades, insufficient length, ditch, brush, trees, pole, crops. Rwy 22 +1-50' tall trees and brush first 1,000' of Rwy 22, 86-250' N of rwy pavement edge and 100-250' S of rwy pavement edge. Rwy 04-22 rough large pits in surface cracks. Rwy 18-36 multiple pot holes entire length of rwy marked by small survey flags. Rwy 04-22 NSTD LIRL, spacing of rwy lgts varies from 240-250', 6 thld lgts located 20' NE of Rwy 22 thld, all thld lgts incorrect spacing. Sport aviation activities in progress on weekends. ACTIVATE LIRL Rwy 04-22—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.7

KANSAS CITY CENTER APP/DEP CON 135.575

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

NAPOLEON (L) VORTACW 114.0 ANX Chan 87 N39°05.73' W94°07.73' 047° 11.6 NM to fld. 878/7E.



LIBERTY**ROOSTERVILLE** (ØNØ) 3 NW UTC-6(-5DT) N39°17.39' W94°26.55'**KANSAS CITY**1004 **FUEL** 100LL, MOGAS NOTAM FILE COU**RWY 18-36:** H2780X20 (ASPH) MIRL (NSTD)**RWY 18:** Trees. **RWY 36:** Trees.

AIRPORT REMARKS: Attended 1400Z+—dusk. For attendant other hrs call 816-781-4326. Wildlife on and invof rwy especially early morning hrs. Rwy 18-36 first 50' on N end steep slope, rwy alignment crooked. Rwy 18-36 NSTD MIRL, lgts 40-50' left and right of centerline at 100' distances on W side, various distances on E side, 2 red thld lgts at each thld. NSTD rwy safety areas beyond both rwy ends, Rwy 18 end large drop off, Rwy 36 has 4' fence 15' from rwy end. Rwy 18 NSTD non-precision instrument markings, small number designations and thld markings, dashed centerline, Rwy 36 NSTD basic markings, small number designations and dashed centerline. ACTIVATE MIRL Rwy 18-36—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8**LINCOLN MUNI** (ØR2) 0 N UTC-6(-5DT) N38°24.14' W93°19.94'**KANSAS CITY**

940 NOTAM FILE COU

RWY 18-36: 2940X125 (TURF)**RWY 18:** Thld dsplcd 340'. Trees. **RWY 36:** Thld dsplcd 240' Fence.

AIRPORT REMARKS: Unattended. Wildlife on and invof arpt. 109' grain elevators 2185-2270' from Rwy 36 30-60' L. +50' treeline 125' west of rwy centerline full length. NSTD rwy safety areas beyond each rwy end, insufficient length, fences, brush, trees and large rwy end markers. Rwy 18-36 soft at thld ends after heavy rain. Rwy 18-36 marked with large yellow cones, dsplcd thlds marked with 3 large yellow cones on both sides of rwy. Rwy 18 dsplcd thld 7' higher than rwy end elevation; Rwy 36 dsplcd thld 4' higher than rwy end elevation.

COMMUNICATIONS: CTAF 122.9**LINN****LINN STATE TECHNICAL COLLEGE** (1H3) 2 SE UTC-6(-5DT) N38°28.30' W91°49.04'**KANSAS CITY**952 B S2 **FUEL** 100LL NOTAM FILE COU**RWY 09-27:** H3400X60 (CONC) S-12.5 MIRL**RWY 09:** REIL. PAPI(P4L)—GA 3.3° TCH 45'. Tower. **RWY 27:** REIL. PAPI(P4L)—GA 3.0° TCH 37'. Trees.

AIRPORT REMARKS: Attended Mon-Fri irregularly. Fuel self svc 24 hrs. Deer on and invof arpt. Waterfowl on and invof arpt. Airframe repair and power plant repair emergency only. MIRL Rwy 09-27 preset on medium ints, to increase ints and ACTIVATE REIL and PAPI Rwy 09 and Rwy 27 and windsock—CTAF.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE V1H.**VICHY (L) VOR/DME** 117.7 **VIH** Chan 124 N38°09.25' W91°42.41' 339° 19.7 NM to fld. 1110/6E.**LUNNS** N37°12.19' W94°33.51' NOTAM FILE JLN.**KANSAS CITY****NDB (LOM)** 344 **JL** 133° 4.2 NM to Joplin Rgnl. LOM unmonitored.**M. GRAHAM CLARK-TANEY CO** (See POINT LOOKOUT)

MACON—FOWER MEM (K89) 1 SE UTC-6(-5DT) N39°43.72' W92°27.87'

KANSAS CITY

874 B FUEL 100LL NOTAM FILE COU

L-27A

RWY 02-20: H3300X60 (ASPH) S-12.5 MIRL

IAP

RWY 02: P-line. Rgt tfc.

RWY 20: Trees.

AIRPORT REMARKS: Attended 1400-2300Z \pm . For svc after hrs call 660-676-2339 or 660-676-4664. Crop dusting acft on and invof arpt. Apr-Oct. Ultralight activity on and invof arpt. Deer on rwy at early and late hrs. **ACTIVATE MIRL Rwy 02-20—CTAF.**


COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.1R 112.9T (COLUMBIA RADIO)

KANSAS CITY CENTER APP/DEP CON 125.25

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

(L) **VOR/DME 112.9 MCM Chan 76** N39°39.24' W92°28.93' 009° 4.6 NM to fld. 870/6E.

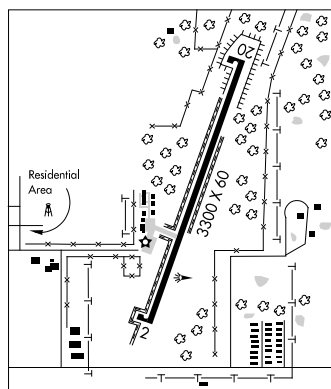

MALDEN RGNL (MAW) 3 N UTC-6(-5DT) N36°35.89' W89°59.55'

ST LOUIS

294 B S2 FUEL 100LL, JET A+ NOTAM FILE STL

H-6J, L-16H

RWY 18-36: H5011X75 (ASPH) S-33, D-48 MIRL

IAP

RWY 18: Rgt tfc.

RWY 14-32: H4999X80 (ASPH) S-33, D-48 MIRL

RWY 14: REIL. Rgt tfc.

RWY 32: REIL. PAPI(P4R)—GA 3.0° TCH 41'. Road.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z \pm . 100LL 24hr card reader. Jet A full svc fuel truck. After hrs call for Jet A FBO cell phone 573-776-4406. Crop dusting acft on and invof arpt. Model acft activity on old CLSD rwys. 24 hr access to pilots lounge. Enter UNICOM on lock for access. Irrigation system may be operating within 300' of Rwy 18 and Rwy 32 ends and sides. **ACTIVATE MIRL Rwy 14-32 and Rwy 18-36, REIL Rwy 14 and Rwy 32 and PAPI Rwy 32—CTAF.**

WEATHER DATA SOURCES: AWOS-3 119.825 (573) 276-9970.


COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.1R 111.2T (ST LOUIS RADIO)

MEMPHIS CENTER APP/DEP CON 133.65

RADIO AIDS TO NAVIGATION: NOTAM FILE STL.

(L) **VORTAC 111.2 MAW Chan 49** N36°33.31' W89°54.69' 300° 4.7 NM to fld. 280/3E.



MANSFIELD MUNI (Ø3B) 2 NW UTC-6(-5DT) N37°07.61' W92°37.30'**KANSAS CITY**
L-166

1500 B NOTAM FILE COU

RWY 07-25: H3000X50 (ASPH) S-12.5 MIRL (NSTD)

RWY 07: VASI(V2L)—GA 3.0° TCH 31'. Trees.

RWY 25: VASI(V2L)—GA 3.0° TCH 25'. Trees.

AIRPORT REMARKS: Unattended. Deer and other wildlife on and in/ov arpt. Rwy 07 VASI OTS indef. Rwy 25 VASI OTS indef. NSTD MIRL, incorrect spacing of thld lgts at each rwy end. Rwy 07-25 NSTD MIRL OTS indef.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE COU.**DOGWOOD (L) VORTAC** 109.4 DGD Chan 31 N37°01.41' W92°52.62' 057° 13.7 NM to fld. 1600/6E.**MAPLES** N37°35.45' W91°47.32'. NOTAM FILE COU.**KANSAS CITY**
HIWAS-166(L) **VORTAC** 113.4 MAP Chan 81 292° 19.1 to Waynesville-ST. Robert Rgnl Forney Fld. 1370/6E.

RCO 122.1R 113.4T (COLUMBIA RADIO)

MARBLE HILL**TWIN CITY AIRPARK** (ØT3) 1 W UTC-6(-5DT) N37°18.79' W89°59.68'**ST LOUIS**

421 NOTAM FILE STL

RWY 12-30: 2600X70 (TURF) LIRL (NSTD)

RWY 12: Trees. RWY 30: Trees.

AIRPORT REMARKS: Unattended. Wildlife on and in/ov arpt. Crops are located very close to rwy edges. NSTD rwy safety areas byd each rwy end, insufficient length, incorrect terrain grades, fence, ditch, brush, small trees. Rwy 12-30 marked with large yellow cones between lgts. Rwy 12-30 NSTD rwy lgts, incorrect spacing and insufficient number of edge and thld lgts. ACTIVATE LIRL Rwy 12-30—122.8.**COMMUNICATIONS:** CTAF 122.9**MARSHALL MEM MUNI** (MHL) 2 S UTC-6(-5DT) N39°05.73' W93°12.17'**KANSAS CITY**
H-5D, L-27A
IAP

779 B FUEL 100LL, JET A1+ NOTAM FILE COU


RWY 18-36: H5006X75 (ASPH-AFSC) S-12.5, D-15.6 MIRL (NSTD)

RWY 18: PAPI(P4R)—GA 3.0° TCH 39'. Thld dsplcd 199'. Trees.

RWY 36: PAPI(P4R)—GA 3.0° TCH 36'.

RWY 09-27: 3320X150 (TURF)

RWY 09: P-line. Rgt tfc.

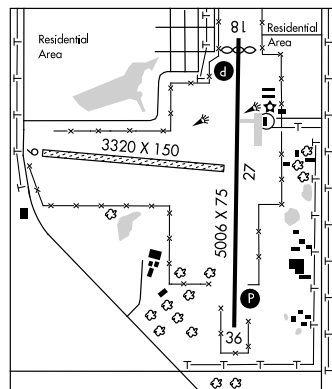AIRPORT REMARKS: Attended Apr-Sep 1200-2300Z†, Oct-Mar 1300-2300Z†. Fuel 100LL and JET A1+ avbl 24 hrs. Sprayer acft on and in/ov arpt. Rwy 18-36 NSTD MIRL—incorrect color of dsplcd thld lights at Rwy 18 end. Rwy 09-27 marked with large yellow cones. ACTIVATE MIRL Rwy 18-36, PAPI Rwy 18 and Rwy 36—CTAF.**WEATHER DATA SOURCES:** AWOS-3 118.675 (660) 886-9130.**COMMUNICATIONS:** CTAF/UNICOM 122.8Ⓡ **WHITEMAN APP CON** 127.45 (Opr 24 hrs from Mon 1300Z† thru Sat 0500Z†, Sat-Sun 1400-2300Z†, clsd holiday) other times ctc.Ⓡ **KANSAS CITY CENTER APP/DEP CON** 135.575Ⓡ **DEP CON** 125.925 (Opr 24 hrs from Mon 1300Z† thru Sat 0500Z†, Sat-Sun 1400-2300Z†, clsd holidays) other times ctc.Ⓡ **KANSAS CITY CENTER APP/DEP CON** 135.575**RADIO AIDS TO NAVIGATION:** NOTAM FILE COU.**NAPOLEON (L) VORTACW** 114.0 ANX Chan 87 N39°05.73' W94°07.73' 083° 43.3 NM to fld. 878/7E.**NDB (MHW)** 371 PUR N39°02.52' W93°11.75' 351° 3.2 NM to fld.

MARYVILLE

NORTHWEST MISSOURI RGNL (EVU) 2 W UTC-6(-5DT) N40°21.20' W94°55.00'

OMAHA

1145 B S4 FUEL 100LL NOTAM FILE COU

L-10J

RWY 14-32: H4600X75 (CONC) S-12.5 MIRL

IAP

RWY 14: REIL. PAPI(P4L)—GA 3.0° TCH 34'.

RWY 32: REIL. PAPI(P4L)—GA 3.0° TCH 34'.

AIRPORT REMARKS: Attended 1400-0100Z+. NSTD wind tee, OTS indef.

MIRL Rwy 14-32 preset on low ints, to increase ints and

ACTIVATE REIL and PAPI Rwy 14 and Rwy 32—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.225 (660) 562-9980.

COMMUNICATIONS: CTAF/UNICOM 122.8

MINNEAPOLIS CENTER APP/DEP CON 119.6


RADIO AIDS TO NAVIGATION: NOTAM FILE STJ.

ST JOSEPH (H) VORTAC 115.5 STJ Chan 102 N39°57.64'

W94°55.51' 353° 23.5 NM to fld. 1160/8E.

EMVILLE NDB (MHW) 317 EVU N40°20.90' W94°54.93' at

fld. Unmonitored. Unusable by 15 NM. NOTAM FILE COU.



RANKIN (78Y) 3 SE UTC-6(-5DT) N40°20.90' W94°50.08'

OMAHA

976 S4 FUEL 100LL TPA—1776(800) NOTAM FILE COU

RWY 17-35: 3050X25 (CONC-GRVL-TURF-ASPH CHIPS) LIRL (NSTD)

RWY 17: Thld dsplcd 735'. P-line.

RWY 35: Road.

AIRPORT REMARKS: Attended 1400Z+—dark. Ultralight activity on and invof arpt. Rwy 17-35 width variance 25'-60'.

Rwy 17-35 first 630' of Rwy 17 grvl/turf 60' wide, next 1300' conc/turf, conc 14' wide, 18' turf on each side, last 1120' grvl/turf/asph chips 15-25' wide, 12.5'-17.5' turf on each side. Rwy 17-35 NSTD LIRL, rwy lgts on part of E and W side at various distances, no thld or dsplcd thld lgts. For LIRL Rwy 17-35 call 660-582-3791.

Rwy 17 dsplcd thld marked with 5 tires on each side of rwy.

COMMUNICATIONS: CTAF/UNICOM 122.8

MEMPHIS MEM (Ø3D) 3 SW UTC-6(-5DT) N40°26.83' W92°13.62'

CHICAGO

813 B FUEL 100LL NOTAM FILE COU

L-27B

RWY 12-30: H3300X60 (CONC) S-12.5 LIRL

RWY 12: Pole.

RWY 30: Trees.

AIRPORT REMARKS: Unattended. For fuel call 660-465-2611. Rwy 12-30 isolated areas with longitudinal cracking. Radio controlled model planes on and invof arpt.


COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE IRK.

KIRKSVILLE (H) VORTAC 114.6 IRK Chan 93 N40°08.10'

W92°35.50' 036° 25.1 NM to fld. 985/6E.

HIWAS.

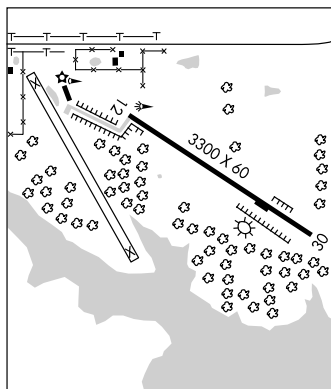

MEXICO MEM (MYJ) 3 E UTC-6(-5DT) N39°09.45' W91°49.10'

823 B S4 FUEL 100LL, JET A, MOGAS NOTAM FILE STL

RWY 06-24: H5501X100 (CONC) S-30, D-37 MIRL 0.3% up SW

RWY 06: Pole.

RWY 24: MALS. PAPI(P4L)—GA 3.0° TCH 40'. Dsplcd thld 371'.

Antenna.

RWY 18-36: H3199X50 (ASPH-CONC) S-10 LIRL

RWY 18: REIL. Pole.

RWY 36: Tree.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z, Sat

1400-2100Z, Sun 1600-2000Z. 24 hr credit card fuel system.

For Jet A fuel after hrs call arpt manager 573-473-7758.

Cropdusting acft on and invof arpt. MIRL Rwy 06-24 and LIRL Rwy

18-36 preset on low ints dusk-0200Z, after 0200Z ACTIVATE

LIRL Rwy 18-36, MIRL Rwy 06-24, PAPI Rwy 24, MALS Rwy 24,

and REIL Rwy 18—CTAF.

WEATHER DATA SOURCES: AWOS-3 120.575 (573) 581-7868.

COMMUNICATIONS: CTAF 122.9


MIZZU APP/DEP CON 124.375

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

HALLSVILLE (L) VORTAC 114.2 HLV Chan 89 N39°06.81'

W92°07.69' 074° 14.7 NM to fld. 920/6E.

LOC/DME 109.5 I-EYR Chan 32 Rwy 24.



KANSAS CITY

H-5D, L-27B

IAP

MID CONTINENT (See HAYTI)

MIDWEST NATIONAL AIR CENTER (See MOSBY)

MISSISSIPPI CO (See CHARLESTON)

MOBERLY

OMAR N BRADLEY (MBY) 3 N UTC-6(-5DT) N39°27.81' W92°25.58'

867 B FUEL 100LL, JET A NOTAM FILE COU

RWY 13-31: H5001X100 (ASPH) S-30, D-38 MIRL

RWY 13: REIL. PAPI (P4L)—GA 3.0° TCH 40'. Thld dsplcd 310'.
Tree.

RWY 31: REIL. PAPI (P4L)—GA 3.0° TCH 37'.

RWY 05-23: H3349X60 (ASPH) S-4 MIRL

RWY 05: Thld dsplcd 239'. Pole. RWY 23: Road.

AIRPORT REMARKS: Attended 1400-2300Z. Sprayer and ultralight acft

on and invof arpt. Rwy 05-23 numerous large cracks length of

rwy. Rwy 13 VASI OTS indef. Rwy 31 VASI OTS indef. Rwy 13 REIL

OTS indef. Rwy 31 REIL OTS indef. MIRL Rwy 05-23 and 13-31

preset on low ints, to increase ints and ACTIVATE REIL Rwy 13

and 31—CTAF.

WEATHER DATA SOURCES: AWOS-3 120.025 (660) 269-8028.


COMMUNICATIONS: CTAF/UNICOM 122.7

MACON RCO 122.1R 112.9T (COLUMBIA RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

MACON (L) VOR/DME 112.9 MCM Chan 76 N39°39.24'

W92°28.93' 161° 11.7 NM to fld. 870/6E.



KANSAS CITY

H-5D, L-27A

IAP

MONETT MUNI (HFJ) 5 W UTC-6(-5DT) N36°54.37' W94°00.77'

KANSAS CITY

1314 B FUEL 100LL, JET A NOTAM FILE COU

H-61, L-16F

Rwy 18-36: H5000X75 (CONC) S-30 MIRL 0.3% up N

IAP

Rwy 18: REIL. PAPI(P4L)—GA 3.0°. TCH 40'. Ground.

Rwy 36: MALS F. REIL. PAPI(P4L)—GA 3.0°. TCH 39'. Trees.

AIRPORT REMARKS: Attended continuously. Self svc fuel avbl 24 hrs.

Wildlife and ultralights on and in vol arpt. Rwy 18-36—60' x 475'

asph safety area N of Rwy 18 thld. Asph twy sections not full strength. Rwy 36 REIL. OTS indef. ACTIVATE MIRL Rwy 18-36,

REIL Rwy 18 and Rwy 36, MALS F Rwy 36—CTAF. PAPI Rwy 18 and Rwy 36 on 24 hrs.

WEATHER DATA SOURCES: AWOS-3 118.275 (417) 476-2613.

COMMUNICATIONS: CTAF/UNICOM 123.075


® SPRINGFIELD APP/DEP CON 124.95 CLNC DEL 121.85

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

NEOSHO (H) VOR/DME 117.3 EOS Chan 120 N36°50.55'

W94°26.14' 072° 20.7 NM to fld. 1200/7E.

COMM/NAV/WEATHER REMARKS: UNICOM unmonitored approximately 50% during daylight hrs.



MONROE CITY

CAPT. BEN SMITH AIRFIELD-MONROE CITY (K52) 1 S UTC-6(-5DT) N39°38.07' W91°43.62' **KANSAS CITY**

737 B S2 FUEL 100LL TPA—See Remarks NOTAM FILE STL

L-27B

Rwy 09-27: H3516X50 (ASPH-RFSC) S-16 MIRL (NSTD)

IAP

Rwy 09: PAPI(P2L)—GA 3.0° TCH 35'. Road.

Rwy 27: REIL. PAPI(P2L)—GA 3.0° TCH 36'. Trees.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z, Sat

1400-1800Z. Ultralight acft on and in vol arpt. TPA for lgt acft

1537(800), turbo prop and jets 2237(1500). NSTD MIRL, split lenses of amber and white missing last 1,758' of Rwy 27. Rwy 09

VASI OTS indef. Rwy 27 VASI OTS indef. MIRL Rwy 09-27 preset low ints; to increase ints and ACTIVATE PAPI Rwy 09 and Rwy

27—CTAF.


COMMUNICATIONS: CTAF/UNICOM 122.8

KANSAS CITY CENTER APP/DEP CON 135.525

RADIO AIDS TO NAVIGATION: NOTAM FILE UIN.

QUINCY (H) VORTAC 113.6 UIN Chan 83 N39°50.88'

W91°16.74' 233° 24.4 NM to fld. 710/5E. HIWAS.



MONTGOMERY CITY

MONTGOMERY-WEHRMAN (4MO) 4 NE UTC-6(-5DT) N39°00.75' W91°25.16'

KANSAS CITY

778 S6 FUEL 100LL NOTAM FILE STL

Rwy 03-21: 2360X75 (TURF-GRVL) LIRL (NSTD)

Rwy 03: Trees. Rwy 21: Trees.

AIRPORT REMARKS: Attended Mon-Sat continuously, Sun 1900-0600Z. For LIRL Rwy 03-21 call arpt manager. Night

operations not recommended. Rwy 03-21 gravel portion 1360'X10'. Rwy 03-21 uneven sfc. NSTD rwy safety

area byd each rwy end, incorrect grade and length, ditch at Rwy 21 thld, fence and trees at Rwy 03 thld. Rwy

03-21, old tanks, trees and brush at various distances along east and west rwy edges in rwy object free area and primary surface. Numerous tall trees in approach and transitional surfaces at each rwy end. Rwy 03-21

NSTD LIRL, mounted on fence at various distances, no thld lgts.

COMMUNICATIONS: CTAF 122.9.

MONTGOMERY-WEHRMAN (See MONTGOMERY CITY)

MONTICELLO**LEWIS CO RGNL** (6M6) 2 NE UTC-6(-5DT) N40°07.75' W91°40.70'**KANSAS CITY**
L-27B, L-27A, A
IAP

675 B FUEL 100LL NOTAM FILE STL

RWY 18-36: H3500X60 (CONC) S-30 MIRL 0.3% up S


RWY 18: PAPI(P2L)—GA 3.0° TCH 40'. Tree.

RWY 36: PAPI(P2L)—GA 3.0° TCH 40'. Road.

AIRPORT REMARKS: Unattended. Ultralight activity on and invof arpt.
Crop dusting acft on and invof arpt. ACTIVATE MIRL Rwy 18-36
—CTAF. PAPI Rwy 18 and Rwy 36 on 24 hrs.**COMMUNICATIONS:** CTAF/UNICOM 122.7 UNICOM unmonitored.® **KANSAS CITY CENTER APP/DEP CON** 135.525**RADIO AIDS TO NAVIGATION:** NOTAM FILE UIN.

QUINCY (H) VORTAC 113.6 UIN Chan 83 N39°50.88'

W91°16.74' 308° 24.9 NM to fld. 710/5E. HIWAS.

**MOSBY****MIDWEST NATIONAL AIR CENTER** (GPH) 1 N UTC-6(-5DT) N39°19.95' W94°18.58'**KANSAS CITY**
H-5C, L-27A, A
IAP

777 B S2 FUEL 100LL, JET A, MOGAS NOTAM FILE COU

RWY 18-36: H5504X100 (ASPH) S-30, D-60 HIRL

RWY 18: REIL. PAPI(P4L)—GA 3.5° TCH 59'. Tree.

RWY 36: REIL. PAPI(P4L)—GA 3.0° TCH 45'. Trees.

AIRPORT REMARKS: Attended Mon-Fri 1300-0100Z†, Sat-Sun 1300-0000Z†. 24 hour credit card fueling system avbl for JET A, 100LL and MOGAS. For after hours full svc fueling call 816-407-3390. After hours call out fee waived with 200 gallon or more fuel purchase. Wildlife on and invof arpt. Confirm snow removal and winter conditions during Nov-Mar, call 816-407-3390. Arpt terminal bldg open 24 hours. ACTIVATE HIRL Rwy 18-36; PAPI Rwy 18 and Rwy 36; REIL Rwy 18 and Rwy 36—CTAF.**COMMUNICATIONS:** CTAF/UNICOM 122.7® **KANSAS CITY APP/DEP CON** 118.4 **KANSAS CITY CLNC DEL** 118.2**RADIO AIDS TO NAVIGATION:** NOTAM FILE MKC.

RIVERSIDE (T) VORW/DME 111.4 RIS Chan 51 N39°07.22' W94°35.80' 041° 18.5 NM to fld. 740/5E.

ILS/DME 110.55 I-CUE Chan 42(Y) Rwy 18. ILS unmonitored.

MOSCOW MILLS**GREENSFIELD** (M71) 4 SW UTC-6(-5DT) N38°54.11' W90°57.62'**KANSAS CITY**
L-27B, A

549 NOTAM FILE STL

RWY 09-27: H3227X50 (ASPH)

RWY 09: Trees. RWY 27: Trees.

AIRPORT REMARKS: Unattended. Wildlife on and invof arpt. NSTD rwy safety area byd each end and along rwy edges. Rwy 09 end has large drop-off, Rwy 27 incorrect terrain grades with brush and trees, small trees, excessive edge drops and ditches along pavement edges. Large areas of high ground, brush, trees and bldgs within primary and transitional surfaces and close to rwy edges. Rwy 09-27 designation markings incorrectly spaced from rwy thld.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE STL.

FORISTELL (L) VORTACW 110.8 FTZ Chan 45 N38°41.66' W090°58.27' 357° 12.4 to fld. 818/5E.

MOUNTAIN GROVE MEM (1M0) 3 SW UTC-6(-5DT) N37°07.24' W92°18.67'

KANSAS CITY

1476 B S6 **FUEL** 100LL, JET A1+, MOGAS NOTAM FILE COU

L-16G

RWY 08-26: H3590X50 (ASPH-RFSC) LIRL (NSTD) 0.5% up E


IAP

RWY 08: Trees.**RWY 26:** Trees.

AIRPORT REMARKS: Attended continuously. Crop dusting acft on and in/ov arpt. NSTD rwy safety areas around entire rwy, incorrect grades, insufficient length byd rwy ends and sides of rwy, numerous trees and obstructions near pavement edges. Exercise caution when using this facility. Numerous Part 77 obstructions in primary, approach, and transitional surfaces around entire rwy. Rwy 08-26 numerous cracks with grass and weeds growing in them. Rwy 08-26 NSTD LIRL, 6 thld lgts at Rwy 26 thld. Rwy lighting system in poor condition.

COMMUNICATIONS: CTAF 122.9**KANSAS CITY CENTER APP/DEP CON** 128.35**RADIO AIDS TO NAVIGATION:** NOTAM FILE COU.**DOGWOOD (L) VORTAC** 109.4 DGD Chan 31 N37°01.41'

W92°52.62' 072° 27.8 NM to fld. 1600/6E.

**MOUNTAIN VIEW** (MNF) 1 SW UTC-6(-5DT) N36°59.57' W91°42.87'

KANSAS CITY

1181 B S1 **FUEL** 100LL, JET A1+ NOTAM FILE COU


H-6J, L-16G

RWY 10-28: H5005X75 (ASPH) MIRL 0.8% up NW

IAP

RWY 10: Thld displcd 320'.**RWY 28:** PAPI (P4L)—GA 3.0° TCH 52'. Pole.

AIRPORT REMARKS: Attended 1400-2300Z+. After hrs phone numbers posted on terminal door. Major powerplant repairs avbl. Wildlife on and in/ov arpt. Rwy 10-28 many cracks with grass and weeds growing in them. NSTD rwy safety areas byd each rwy end, incorrect terrain grades, brush and small trees.

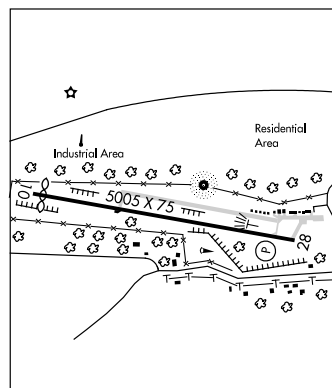COMMUNICATIONS: CTAF/UNICOM 122.8**KANSAS CITY CENTER APP/DEP CON** 128.35**RADIO AIDS TO NAVIGATION:** NOTAM FILE COU.**MAPLES (L) VORTAC** 113.4 MAP Chan 81 N37°35.45'W91°47.32' 168° 36.0 NM to fld. 1370/6E. **HIWAS.****NDB (MHW)** 365 MNF N36°59.64' W91°42.76' at fld.

MT VERNON MUNI (2M0) 3 SW UTC-6(-5DT) N37°04.10' W93°53.10'

KANSAS CITY

1244 S4 NOTAM FILE COU

L-16F


Rwy 18-36: H3195X60 (ASPH) MIRL**Rwy 18:** Road. **Rwy 36:** Brush.**AIRPORT REMARKS:** Attended irregularly. Parachute Jumping. User fee.

Insufficient rwy safety area length byd Rwy 36 end. Rwy 18-36

MIRL OTS indef. ACTIVATE MIRL Rwy 18-36—CTAF.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE COU.**NEOSHO (H) VOR/DME** 117.3 EOS Chan 120 N36°50.55'

W94°26.14' 056° 29.8 NM to fld. 1200/7E.

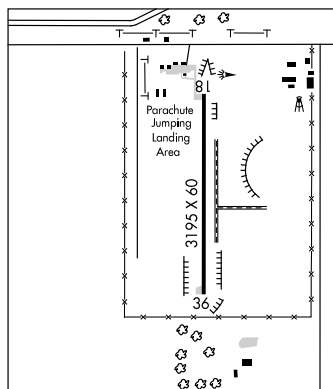**NAPOLEON** N39°05.73' W94°07.73' NOTAM FILE COU.

KANSAS CITY

(L) VORTACW 114.0 ANX Chan 87 213° 6.2 NM to East Kansas City. 878/7E.

H-5C, L-27A, A

NEOSHO HUGH ROBINSON (EOS) 3 S UTC-6(-5DT) N36°48.65' W94°23.50'

KANSAS CITY

1255 B S6 FUEL 100LL, JET A1+ NOTAM FILE COU

H-61, L-16F

Rwy 01-19: H5001X100 (ASPH-AFSC) S-30, D-43 MIRL 0.7% up S

IAP

Rwy 01: REIL. PAPI(P4L)—GA 3.0° TCH 31'.**Rwy 19:** REIL. PAPI(P4L)—GA 3.0° TCH 40'. Trees.**AIRPORT REMARKS:** Attended 1400-2200Z±. For svc after hrs call

417-592-1499. 24 hr self service 100LL fuel pump. Wildlife on

and invof arpt. Ground hazard Camp Crowder Firing Range

activity—stay above pattern altitude till base leg, weekdays and

weekends indef. Rwy 01-19 line of sight obstructed by grade

change on north end. ACTIVATE MIRL Rwy 01-19 and REIL Rwy 01

and Rwy 19—CTAF. PAPI Rwy 01 and Rwy 19 opr 24 hrs.

COMMUNICATIONS: CTAF/UNICOM 122.8**RCO** 122.1R 117.3T (COLUMBIA RADIO)

® KANSAS CITY CENTER APP/DEP CON 128.6

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

(H) VOR/DME 117.3 EOS Chan 120 N36°50.55' W94°26.14'

125° 2.8 NM to fld. 1200/7E.



NEVADA MUNI (NVD) 3 NE UTC-6(-5DT) N37°51.12' W94°18.29'

892 B S2 FUEL 100LL, JET A NOTAM FILE COU

RWY 02-20: H5000X75 (CONC) S-35, D-48 MIRL

RWY 02: REIL. PAPI(P4L)—GA 3.0° TCH 34'.

RWY 20: REIL. PAPI(P4L)—GA 3.0° TCH 38'. Trees.

RWY 13-31: H2581X40 (ASPH-DIRT) S-19

RWY 13: Tree. RWY 31: Trees.

AIRPORT REMARKS: Attended 1330Z±-dusk. Crop dusting and ultralight acft on and invof arpt. Wildlife on and in vicinity of rwy dusk-dawn.

Rwy 13-31 pavement cracked with loose asph chips and vegetation growing in cracks. Rwy 13-31 limited by arpt manager to 8000 pounds single wheel gear. Rwy 02-20 various locations with grass and weeds growing through cracks. **ACTIVATE MIRL** Rwy 02-20, PAPI Rwy 02 and Rwy 20, REIL Rwy 02 and Rwy 20—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.175 (417) 448-1635.

COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ **KANSAS CITY CENTER APP/DEP CON** 125.55


RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

BUTLER (H) VORTAC 115.9 BUM Chan 106 N38°16.33'

W94°29.29' 154° 26.6 NM to fld. 890/7E. **HIWAS.**

NDB (MHW) 209 EAD N37°51.54' W94°18.16' at fld.

NDB unusable byd 15 NM.



KANSAS CITY

H-5C, L-16F

IAP

NEW MADRID

COUNTY MEM (EIW) 4 SW UTC-6(-5DT) N36°32.12' W89°35.98'

296 B FUEL 100LL NOTAM FILE STL

RWY 18-36: H3200X60 (ASPH) MIRL

AIRPORT REMARKS: Attended Apr-Sep, Mon-Fri, 1400-2330Z±, Oct-Mar, Mon-Fri, 1400-2230Z±, Jan-Dec, Sat-Sun, 1500-2230Z±. For svc after hrs, call arpt manager at 573-688-5058 or 573-934-3734. Crop dusting acft on and in vicinity of arpt. MIRL Rwy 18-36 preset on med ints, to increase ints and **ACTIVATE MIRL** Rwy 18-36—CTAF.


COMMUNICATIONS: CTAF/UNICOM 122.8 UNICOM unmonitored.

Ⓡ **MEMPHIS CENTER APP/DEP CON** 133.65

RADIO AIDS TO NAVIGATION: NOTAM FILE STL.

MALDEN (L) VORTAC 111.2 MAW Chan 49 N36°33.31'

W89°54.69' 091° 15.1 to fld. 280/3E

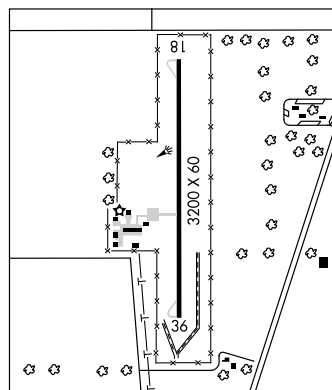

ST LOUIS

L-16H

IAP

NOAH N38°38.23' W92°14.69' NOTAM FILE JEF.

NDB (MHW) 515 ONH 120° 5.0 NM to Jefferson City Mem.

KANSAS CITY

L-27B

NORTH CENTRAL MISSOURI RGNL (See BROOKFIELD)

NORTHWEST MISSOURI RGNL (See MARYVILLE)

OBLIO N38°48.02' W90°28.48' NOTAM FILE STL.

NDB (LOM) 338 LM 122° 5.8 NM to Lambert-St Louis Intl.

ST LOUIS

L-27B, A

OMAR N BRADLEY (See MOBERLY)

OSAGE BEACH**GRAND GLAIZE—OSAGE BEACH** (K15) 1 SW UTC-6(-5DT) N38°06.63' W92°40.83'

KANSAS CITY

875 B FUEL 100LL NOTAM FILE COU

L-166

RWY 14-32: H3205X60 (ASPH-RFSC) S-15 MIRL (NSTD) 0.6% up NW

IAP

RWY 14: Trees. RWY 32: PAPI(P4L)—GA 3.5° TCH 46'. Trees.

AIRPORT REMARKS: Attended Apr-Sep Sat-Thur 1400-0000Z†, Fri 1400-0200Z†; Oct-Mar 1400-0000Z†; Oct-Apr Mon-Wed 1400-2300Z†, Thur-Sun 1400-0000Z†. Rwy 14-32 restricted to acft 12,500 lbs maximum gross weight or less; PPR for acft exceeding 12,500 lbs call arpt manager on 573-302-2003. Deer on and in/ovf rwy and taxiways dusk and after dark. NSTD rwy safety area grading byd each rwy end, large drop offs and rolling terrain. Rwy 14-32 NSTD MIRL, incorrect spacing of thld lgts at Rwy 32 end. ACTIVATE MIRL Rwy 14-32, PAPI Rwy 32-CTAF.


COMMUNICATIONS: CTAF/UNICOM 122.8

® MIZZU APP/DEP CON 124.1

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

SUNSHINE (L) VORW/DME 108.4 SHY Chan 21 N38°02.44'

W92°36.15' 314° 5.6 NM to fld. 910/5E

**TAN TAR A RESORT SPB** (19T) 6 N UTC-6(-5DT) N38°08.00' W92°44.01'

KANSAS CITY

659 FUEL MOGAS NOTAM FILE COU

WATERWAY NW-SE: 13000X1200 (WATER)**SEAPLANE REMARKS:** Unattended. Waterways NW and SE, trees and bluffs all quadrants. No buoys showing ldg areas.

Heavy boat tfc Apr thru Oct. Waterways NW and SE rough sfc conditions Apr-Oct.

COMMUNICATIONS: CTAF 122.9**OSCEOLA MUNI** (3MO) 2 S UTC-6(-5DT) N38°01.12' W93°41.59'

KANSAS CITY

900 NOTAM FILE COU

RWY 18-36: 2430X74 (TURF-GRVL) LIRL (NSTD)

RWY 18: Fence. RWY 36: Thld dspld 300'. Trees.

AIRPORT REMARKS: Unattended. Rwy 18-36 south end 800' very soft turf after rain and in spring. Rwy 18-36 rough and uneven. NSTD Rwy safety area beyond Rwy 18 end, insufficient length and fence. Perpendicular twy not intended for landing. Private E/W twy at Rwy 18 thld. Rwy 18 marked with large yellow cones. Dsplcd thld marked with 3 large yellow cones on each side of rwy. Rwy 36 dspld thld dalgt use only; dspld thld +3' higher than rwy end thld. Rwy 18-36 NSTD LIRL, Rwy 18-6 green thld lgts; Rwy 36-6 green thld lgts; no dspld thld lgts. Rwy lighting system in poor condition with many broken and missing edge and thld lgts. ACTIVATE LIRL Rwy 18-36—122.8.

COMMUNICATIONS: CTAF 122.9**OWEN FLD** (See SEYMOUR)

PERRINE N37°45.84' W90°25.72' NOTAM FILE FAM.
NDB (MHW) 367 PRI at Farmington Rgnl. Unmonitored.

ST LOUIS
L-16H

PERRYVILLE MUNI (K02) 9 N UTC-6(-5DT) N37°52.12' W89°51.73'
 372 B S2 NOTAM FILE STL
Rwy 02-20: H7003X100 (CONC) S-28, D-48 MIRL

ST. LOUIS
H-5D, L-16H
IAP

Rwy 20: REIL. PAPI(P2L).
Rwy 02: REIL. Thld dsplcd 520'.Road.

AIRPORT REMARKS: Attended Mon-Fri 1400-2230Z†, Sat-Sun 1400-2000Z†. Transient acft use facilities on west side of rwy. High performance military jet acft production test flying during daylight hours; cables may be across rwy at these times. Cables are located approximately 1,800' south of Rwy 20 thld and 1,800' north of Rwy 02 thld. Check NOTAMS and ask UNICOM opr for current rwy situation. NSTD rwy safety area byd Rwy 20 end, incorrect terrain grades and crops. REIL located at rwy thld, not at dsplcd thld. MIRL Rwy 02-20 preset on low ints; to increase ints and ACTIVATE MIRL Rwy 02-20, PAPI Rwy 20, REIL Rwy 02 and Rwy 20—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8


FARMINGTON RCO 122.3 (ST LOUIS RADIO)

FARMINGTON RCO 122.1R 115.7T (ST LOUIS RADIO)

KANSAS CITY CENTER APP/DEP CON 127.47

RADIO AIDS TO NAVIGATION: NOTAM FILE FAM.

FARMINGTON (H) VORTAC 115.7 FAM Chan 104 N37°40.41' W90°14.04' 055° 21.2 NM to fld. 1220/1E. **HIWAS.**



PIEDMONT MUNI (PYN) 2 SW UTC-6(-5DT) N37°07.57' W90°42.81'

KANSAS CITY

467 B FUEL 100LL NOTAM FILE STL

L-16H

RWY 03-21: H3300X60 (ASPH) S-12.5 MIRL

RWY 03: REIL. Trees. Rgt tfc.

RWY 21: REIL. Trees.

AIRPORT REMARKS: Unattended. For fuel call 573-223-4300. Rwy 03-21 CLOSED SS-SR. Birds and wildlife on and in/ovf arpt. Last 35' of turnaround at SE twy not usable, pilots of low wing acft use care. Rotating bcn OTS indef. MIRL 03-21 OTS indef. MIRL Rwy 03-21 preset on med ints and REIL Rwy 03 and Rwy 21 opr dusk-0800Z, to increase ints MIRL Rwy 03-21 ACTIVATE—CTAF. After 0800Z ACTIVATE MIRL Rwy 03-21 and REIL Rwy 03 and Rwy 21—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.475 (573) 223-2796.

COMMUNICATIONS: CTAF/UNICOM 122.8 UNICOM freq not monitored.

RADIO AIDS TO NAVIGATION: NOTAM FILE FAM.

FARMINGTON (H) VORTAC 115.7 FAM Chan 104 N37°40.41' W90°14.04' 214° 40.0 NM to fld. 1220/1E.

HIWAS. VASI Rwy 21 opr 24 hrs.

PLATTSBURG AIRPARK (5MO) 2 N UTC-6(-5DT) N39°35.68' W94°27.69'

KANSAS CITY

1020 S4 NOTAM FILE COU

RWY 18-36: 2100X20 (ASPH-TURF)

RWY 18: Fence.

RWY 36: Trees.

AIRPORT REMARKS: Attended dawn-dusk. Wildlife on and in/ovf arpt, large flocks of geese on lake. Rwy 18-36 asph width variance 6-20'. Rwy 18-36 south 510' and north 70' of turf in good condition, asph has potholes with loose aggregate and vegetation growing in cracks.

COMMUNICATIONS: CTAF 122.9

POINT LOOKOUT N36°37.65' W93°13.80' NOTAM FILE COU.

KANSAS CITY

RCO 122.65 (COLUMBIA RADIO)

L-16F

POINT LOOKOUT

M. GRAHAM CLARK-TANEY CO (PLK) 1 NE UTC-6(-5DT) N36°37.56' W93°13.74'

KANSAS CITY

940 B S2 FUEL 100LL, JET A NOTAM FILE COU

L-16F

RWY 11-29: H3738X100 (ASPH-GRVD) S-70, D-100 MIRL

IAP

RWY 11: REIL. Thld dsplcd 113'.

RWY 29: REIL. VASI(V4R)—GA 3.0° TCH 52'. Thld dsplcd 86'.

AIRPORT REMARKS: Attended Sep-May 1300-0100Z, Jun-Aug 1300-0300Z. Deer on and in/ovf arpt. Student training activities in the area. Branson Arpt attractions near arpt. General aviation svcs E end of airfield. Private air ambulance helicopter parking on east side of general aviation terminal. No safety/overrun areas at rwy ends—large drop-offs. Steep terrain gradients along rwy pavement edges. Rwy 11 REIL located at dsplcd thld. Rwy 29 REIL located at dsplcd thld. ACTIVATE MIRL Rwy 11-29, VASI Rwy 29, REIL Rwy 11 and Rwy 29—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.7


POINT LOOKOUT RCO 122.65 (COLUMBIA RADIO)

® SPRINGFIELD APP/DEP CON 126.35

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

DOGWOOD (L) VORTAC 109.4 DGD Chan 31 N37°01.41'

W92°52.62' 210° 29.2 NM to fld. 1600/6E.

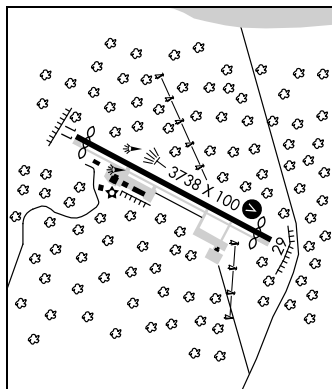

POPLAR BLUFF MUNI (POF) 3 E UTC-6(-5DT) N36°46.44' W90°19.49'ST LOUIS
H-6J, L-16H
IAP

331 B S2 FUEL 100LL, JET A NOTAM FILE POF

RWY 18-36: H5008X100 (ASPH-CONC) S-16 MIRL (NSTD)


RWY 18: REIL. PAPI(P4L)—GA 3.0° TCH 30'. Trees.

RWY 36: REIL. VASI(V4L)—GA 3.0° TCH 40'. Thld dsplcd 300'.
Trees.

AIRPORT REMARKS: Attended 1300-2200Z. Crop dusting on and invof arpt from Mar to Aug. Rwy 18-36 first 1000' of Rwy 18 is conc remainder is asph. Rwy 18-36 dsplcd thld lgts set at 300' fm rwy end. NSTD Rwy 36 marking, incorrect spacing of dsplcd thld markings. Twy from apron to Rwy 36 end does not provide sufficient visual reference of Rwy 36 apch area while taxiing to Rwy 36 end from apron. ACTIVATE MIRL Rwy 18-36 and VASI Rwy 36 and PAPI Rwy 18—CTAF.

WEATHER DATA SOURCES: ASOS 124.225 (573) 778-9172.**COMMUNICATIONS:** CTAF/UNICOM 123.0Ⓡ **MEMPHIS CENTER APP/DEP CON** 120.075**RADIO AIDS TO NAVIGATION:** NOTAM FILE STL.MALDEN (L) VORTAC 111.2 MAW Chan 49 N36°33.31'
W89°54.69' 300° 23.9 NM to fld. 280/3E.EARLI NDB (MHW/LOM) 278 FD N36°40.14' W90°19.70'
359° 6.3 NM to fld. Unmonitored. NOTAM FILE POF.

SDF 108.7 FDI Rwy 36. LOM EARLI NDB. Backcourse unusable.


**POTOSI****WASHINGTON CO** (8WC) 3 E UTC-6(-5DT) N37°55.75' W90°43.89'ST LOUIS
L-16H
IAP

959 B FUEL 100LL, JET A NOTAM FILE STL

RWY 02-20: H4000X60 (ASPH) S-11 MIRL 0.3% up S.

RWY 02: Trees. Rgt tfc. RWY 20: Trees.

AIRPORT REMARKS: Attended Mon-Fri 1400-2230Z. For fuel after hrs call number posted by outside phone. FBO and fuel located at south apron. Wildlife on and invof arpt. Use right tfc for Rwy 02, do not overfly prison area. Rwy 02-20 pavement rated for acft under 12,500 pounds. ACTIVATE MIRL Rwy 02-20—CTAF.

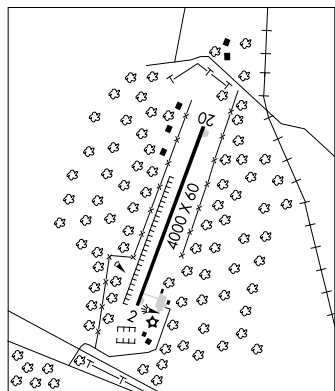COMMUNICATIONS: CTAF/UNICOM 123.0Ⓡ **KANSAS CITY CENTER APP/DEP CON** 128.35**RADIO AIDS TO NAVIGATION:** NOTAM FILE FAM.FARMINGTON (H) VORTAC 115.7 FAM Chan 104 N37°40.41'
W90°14.04' 302° 28.2 NM to fld. 1220/1E. HIWAS.**PRINCETON-KAUFFMAN MEM** (7MO) 2 NW UTC-6(-5DT) N40°25.26' W93°35.97'

OMAHA

858 NOTAM FILE COU

RWY 18-36: 2475X100 (TURF)

RWY 18: Tree. RWY 36: Thld dsplcd 200'. Tree.

AIRPORT REMARKS: Unattended. Call arpt manager for conditions 660-748-4375. 45' utility lines 1300' south of Rwy 36 thld. Rwy soft in spring and fall. Wildlife on and invof arpt. Rwy thlds line of sight obstructed by changes in terrain grade. NSTD rwy safety areas byd each rwy end, Rwy 18 end has incorrect terrain grades, insufficient length, ditch, bush and trees, Rwy 36 end has insufficient length, ditch, fence, road, brush and trees. Rwy 18-36 marked with large yellow cones, dsplcd thld Rwy 36 marked with 3 large yellow cones on each side of rwy. Rwy 36 dsplcd thld is 3' higher than rwy end.

COMMUNICATIONS: CTAF 122.9**RANKIN** (See MARYVILLE)

RICHLAND MUNI (MO1) 1 N UTC-6(-5DT) N37°52.49' W92°24.48'

KANSAS CITY

1110 NOTAM FILE COU

L-166

RWY 14-32: H3000X60 (ASPH) S-6 LIRL

RWY 14: Thld dspcd 170'. Trees.

RWY 32: Thld dspcd 130'. Trees.

AIRPORT REMARKS: Unattended. Ultralight activity on and invof arpt.

Wildlife on and invof arpt. Turnoff lgts to ramp only. Golfers

crossing rwy approximately 800' NW of Rwy 32 thld. ACTIVATE


LIRL Rwy 14-32—CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

MAPLES (L) VORTAC 113.4 MAP Chan 81 N37°35.45'

W91°47.32' 294° 34.0 NM to fld. 1370/6E. HIWAS.

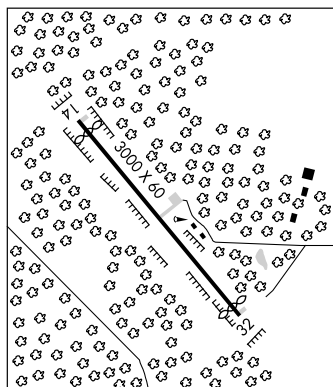

RIVERSIDE N39°07.22' W94°35.80' NOTAM FILE MKC.

KANSAS CITY

(T) **VOR/DME** 111.4 RIS Chan 51 at Charles B. Wheeler Downtown. 740/5E.

L-10J, A

VOR/DME unusable 090°-170° 320°-345°

VOR unusable byd 15 NM

ROLLA DOWNTOWN (K07) 3 SW UTC-6(-5DT) N37°56.14' W91°48.81'

KANSAS CITY

987 NOTAM FILE COU

L-166

RWY 09-27: H3028X38 (ASPH) LIRL (NSTD) 0.3% up E

IAP

RWY 09: Trees.

RWY 27: Thld dspcd 445'. Tree.

AIRPORT REMARKS: Unattended. Wildlife on and invof arpt. Ultralight acft on and invof arpt. Rwy 09-27 line of sight obstructed by grade change in rwy. Tall brush located 70-125' S of rwy, fm Rwy 09 thld to access twy. Rwy 09-27 glassphalt coating deteriorating and glass chips are becoming loose. Tall weeds on rwy. Rwy 09-27 NSTD LIRL; Two green thld lgts Rwy 09; Two green thld lgts 10-15 feet west of dspcd thld bar Rwy 27; No dspcd thld lgts; Rwy edge lgts 35-40 feet from rwy edge. First 445 feet of Rwy 27 unlgtd. Rwy 27 dspcd thld elev 7 feet higher than rwy end elev; dalgt ops only. Rwy 09-27 NSTD LIRL OTS indef. ACTIVATE LIRL Rwy 09-27—CTAF.


COMMUNICATIONS: CTAF/UNICOM 122.8 UNICOM unmonitored.

KANSAS CITY CENTER APP/DEP CON 128.35

RADIO AIDS TO NAVIGATION: NOTAM FILE VIH.

VICHY (L) VOR/DME 117.7 VIH Chan 124 N38°09.25'

W91°42.41' 195° 14.0 NM to fld. 1110/6E.

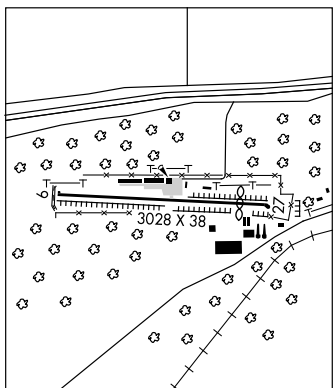

ROLLA NATIONAL (See ROLLA/VICHY)

ROLLA/VICHY**ROLLA NATIONAL** (VIH) 11 N UTC-6(-5DT) N38°07.65' W91°46.17'**KANSAS CITY**

1148 B S2 FUEL 100LL, JET A NOTAM FILE COU

H-5D, L-166

RWY 04-22: H5500X100 (ASPH) S-75, D-85, 2S-108, 2D-130

HIRL (NSTD) 0.5% up SW

IAP

RWY 04: VASI(V4L)—GA 3.0° TCH 45'. Thld dspcd 213'. Road.

RWY 22: VASI(V4L)—GA 3.0° TCH 52'. Tree.

RWY 13-31: H5500X100 (ASPH) S-48, D-62, 2D-92 MIRL


RWY 13: Road.

RWY 31: Trees.

AIRPORT REMARKS: Attended 1300Z±—dusk. 97' twr located 1800' NNE of Rwy 13 thld. Radio controlled model airplanes invof arpt. Wildlife on and invof arpt. CLSD Rwy 18-36 not to be used as twy. Helipad parking on SE corner of apron. Airframe and power plant repairs emergency only. Rwy 04-22 NSTD HIRL, lgts are 34' from pavement edge. ACTIVATE HIRL Rwy 04-22 MIRL Rwy 13-31, VASI Rwy 04 and Rwy 22—CTAF.

WEATHER DATA SOURCES: ASOS 119.025 (573) 299-4419.**COMMUNICATIONS:** CTAF/UNICOM 123.0**KANSAS CITY CENTER APP/DEP CON** 128.35**AIRSPACE:** CLASS E svc 1200-0400Z±.**RADIO AIDS TO NAVIGATION:** NOTAM FILE VIH.

VICHY (L) VOR/DME 117.7 VIH Chan 124 N38°09.25' W91°42.41' 236° 3.4 NM to fld. 1110/6E.

**ROOSTERVILLE** (See LIBERTY)**ROSECRANS MEM** (See ST JOSEPH)**ROY OTTEN MEM AIRFIELD** (See VERSAILLES)**ST CHARLES****ST CHARLES** (3SQ) 4 N UTC-6(-5DT) N38°50.92' W90°30.01'**ST LOUIS**

442 B S4 FUEL 100LL TPA-1092(650) NOTAM FILE STL

L-27B, A

RWY 09-27: H3451X50 (ASPH) S-8 LIRL (NSTD)

IAP

RWY 09: VASI(V4L)—GA 3.0° TCH 40'. Brush.

RWY 27: PAPI(P4R)—GA 3.0° TCH 39'. P-line. Rgt tfc.

RWY 15-33: 2310X103 (TURF)

RWY 15: Thld dspcd 400'. Road.

RWY 33: P-line.

RWY 18-36: 2145X100 (TURF)


RWY 18: Thld dspcd 400'. Road.

RWY 36: Thld dspcd 200'. Bldg.

AIRPORT REMARKS: Attended Apr-Oct 1400-0400Z±, Nov-Mar 1400-0200Z±. Rwy 09-27 rough rwy surface. Transverse asphalt ridges over majority of rwy. Rwy 09-27 cracks, rocks and asphalt breaking up, length of rwy. Rwy 15-33 rolling rough and uneven. Rwy 18-36 various areas are rolling and rough. Crops located 60' fm rwy thlds and 120' fm centerline first 1,800' of Rwy 09 are within rwy object free area and primary and transitional surfaces. NSTD rwy safety area clearing and terrain grades byd the end of Rwy 09, Rwy 27, Rwy 15 and Rwy 18, crops and ditch. Partial parallel twy for Rwy 09-27 located 70-75' fm rwy. Rwy 15-33 marked with large yellow cones, dspcd thlds marked with 3 large yellow cones on each side of rwy. Rwy 18-36 marked with large yellow cones, dspcd thlds marked with 3 large yellow cones on each side of rwy. Moderate student training. Rwy 09-27 NSTD LIRL, 4 thld lgts Rwy 09. All thld lgt lens nstd color. Thld lgts and rwy edge lgts placed 45-50' from pavement edge. Rwy edge lgts white last 1700' of Rwy 09. ACTIVATE VASI Rwy 09, PAPI Rwy 27—CTAF.

COMMUNICATIONS: CTAF/UNICOM 123.0⑧ **ST LOUIS APP/DEP CON** 124.2 **CLNC DEL** 120.15**RADIO AIDS TO NAVIGATION:** NOTAM FILE STL.

ST LOUIS (H) VORTACW 117.4 STL Chan 121 N38°51.64' W90°28.94' 228° 1.1 NM to fld. 450/1E. HIWAS.

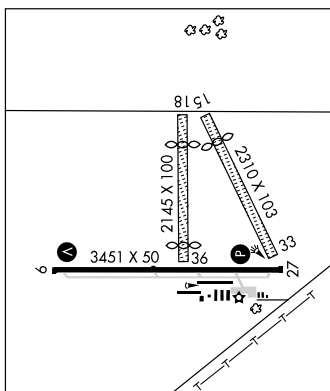

ST CHARLES CO SMARTT (SET) 9 NE UTC-6(-5DT) N38°55.78' W90°25.80'ST LOUIS
L-27B, A
IAP

437 B S4 FUEL 100LL NOTAM FILE SET

RWY 18-36: H3800X75 (ASPH) S-12.5 MIRL

RWY 18: REIL. PAPI(P4L)—GA 3.0° TCH 51'. Road.

RWY 36: VASI(V4L)—GA 3.0° TCH 41'.

RWY 09-27: H2000X75 (ASPH) S-12.5 MIRL

RWY 09: P-line.

AIRPORT REMARKS: Attended Apr-Oct 1400Z±-dusk, Nov-Mar 1400-2300Z±. NSTD rwy safety area terrain grades byd the ends of Rwy 09 and Rwy 27. Moderate student training. ACTIVATE VASI Rwy 36—CTAF. PAPI Rwy 18 operates continuously.

WEATHER DATA SOURCES: ASOS 118.075 (636) 250-4590.**COMMUNICATIONS:** CTAF/UNICOM 122.7

® ST LOUIS APP/DEP CON 124.2


CLNC DEL 121.6

RADIO AIDS TO NAVIGATION: NOTAM FILE STL.

ST LOUIS (H) VORTACW 117.4 STL Chan 121 N38°51.64'

W90°28.94' 030° 4.8 NM to fld. 450/1E.

HIWAS.

**ST CLAIR RGNL** (K39) 2 N UTC-6(-5DT) N38°22.54' W90°58.33'ST LOUIS
L-27B, A

656 B NOTAM FILE STL

RWY 02-20: H3198X60 (ASPH) S-4 LIRL


RWY 02: REIL. Trees. RWY 20: Tree.

AIRPORT REMARKS: Attended 1400-2300Z±. Helicopter ops on and invof arpt. Ultralights on and invof arpt. Rwy 02 REIL OTS indef.

COMMUNICATIONS: CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE STL.

FORISTELL (L) VORTACW 110.8 FTZ Chan 45 N38°41.66'

W90°58.27' 175° 19.1 NM to fld. 818/5E.

**ST JOSEPH** N39°57.64' W94°55.51' NOTAM FILE STJ.KANSAS CITY
H-5C, L-10J

(H) VORTAC 115.5 STJ Chan 102 168° 11.3 NM to Rosecrans Mem. 1160/8E.

RCO 122.3 122.1R 115.5T (COLUMBIA RADIO)

ST JOSEPH**ROSECRANS MEM** (STJ) 3 NW UTC-6(-5DT) N39°46.32' W94°54.58'**KANSAS CITY**826 B S4 **FUEL** 100LL, JET A OX 3,4 Class IV, ARFF Index A NOTAM FILE STJ
RWY 17-35: H8059X150 (CONC-GRVD) S-75, D-130, 2S-175, 2D-220, 2D/2D2-220 HIRL
RWY 17: REIL. VASI(V4L)—GA 3.0° TCH 56'.
RWY 35: REIL. VASI(V4L)—GA 2.8° TCH 64'.

H-5C, L-10J

IAP, AD

RWY 13-31: H4797X75 (ASPH-CONC) S-75, D-110, 2S-140,
2D-180, 2D/2D2-180**AIRPORT REMARKS:** Attended 1300-0100Z†. Rwy 13-31 open SR-SS.

For svcs after hrs call number posted at FBO entrance. ARFF available by Air National Guard. Arpt CLOSED to acft over 350,000 lbs exception prior permission. CLOSED to air carrier ops over 30 passenger seats except 48 hrs PPR, call arpt manager 816-271-4886. High migratory bird activity Oct-Mar on and in/ov arpt. ROSECRANS MEM (STJ) is surrounded by lakes and the Missouri River. Bird watch condition phase II Mar-Apr and Oct-Nov. Moderate small bird activity possible during early morning daylight hours from May thru Sep. Intensive Air National Guard tactical training within arpt tfc area. For advisory and position information, call St Joseph Twr or monitor twr frequency when clsd. Rwy 13-31 and Twy B west to Rwy 31 open to general aviation acft VFR conditions and dalgt hrs only. All C5/C17 acft must use Twy B to the guard ramp. This request will require back taxi of these acft on the active rwy. Rwy 17-35 center 130' grooved. Rwy 35 touchdown runway visual range avbl. HIRL Rwy 17-35 preset on low ints, to increase ints and ACTIVATE REIL Rwy 17 and Rwy 35—CTAF.

WEATHER DATA SOURCES: ASOS (816) 233-0666. LAWRS.**COMMUNICATIONS:** CTAF 126.9 ATIS 125.05 UNICOM 122.95

Ⓡ ST JOSEPH APP/DEP CON 120.35 (Mon-Sat 1400-0000Z†, Sun 1800-0000Z†)

Ⓡ KANSAS CITY APP/DEP CON 124.7 (Mon-Sat 0000-1400Z†, Sun 0000-1800Z†)

ST JOSEPH TOWER 126.9 (1400-0000Z†) GND CON 121.9

AIRSPACE: CLASS D svc (1400-0000Z†) other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE STJ.


ST JOSEPH (H) VORTAC 115.5 STJ Chan 102 N39°57.64' W94°55.51' 168° 11.3 NM to fld. 1160/8E.

AMAZON NDB (MHW) 233 AZN N39°53.04' W94°54.49' 175° 6.7 NM to fld.

TARIO NDB (LOM) 260 ST N39°40.55' W94°54.42' 355° 5.8 NM to fld.

ILS 110.3 I-STJ Rwy 35. Class IE. LOM TARIO NDB. ILS unmonitored when twr clsd.

ASR

COMM/NAV/WEATHER REMARKS: Frequency 121.9 remoted to Kansas City App Con when twr clsd.**ST LOUIS** N38°51.64' W90°28.94' NOTAM FILE STL.**ST LOUIS**

(H) VORTACW 117.4 STL Chan 121 141° 8.5 NM to Lambert-St. Louis Intl. 450/1E. HIWAS.

H-5D, L-27B, A

RCO 122.45 (ST LOUIS RADIO)

ST LOUIS

CREVE COEUR (1H0) 4 NW UTC-6(-5DT) N38°43.60' W90°30.50'

463 B S3 FUEL 100LL, JET A TPA—See Remarks NOTAM FILE STL

RWY 16-34: H4500X75 (CONC) S-3 MIRL

RWY 16: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Trees. Rgt tfc.

RWY 34: REIL. PAPI(P4L)—GA 3.0° TCH 30'. Pole.

RWY 07-25: 3120X220 (TURF)

RWY 07: Trees. RWY 25: Crops. Rgt tfc.

AIRPORT REMARKS: Attended 1400Z†-dusk. Rwy 07-25 and Rwy 16-34

CLOSED to touch and go lds. Deer on and invof arpt. Helicopter ops on and invof arpt. Hover taxi training ops are conducted parallel to Rwy 07-25. Be alert to increased antique acft ops on and invof arpt on weekends. Rwy 16-34 restricted to acft 30,000 lbs max gross weight or less, single wheel. Rwy 16-34 restricted to acft 12,000 lbs max gross weight or less; PPR for acft exceeding 12,500 lbs call arpt manager on 314-878-6400.

Ultralights not allowed. Call arpt manager for information about twy and apron strength. TPA—1113(650) and 1463(1000) for acft over 12,500 pounds. Rwy 07-25 marked with large yellow cones.

MIRL Rwy 16-34 preset on low ints, to increase ints and


ACTIVATE REIL Rwy 16 and Rwy 34—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ ST LOUIS APP/DEP CON 126.5

RADIO AIDS TO NAVIGATION: NOTAM FILE STL.

FORSTELL (L) VORTACW 110.8 FTZ Chan 45 N38°41.66' W90°58.27' 080° 21.8 NM to fld. 818/5E.

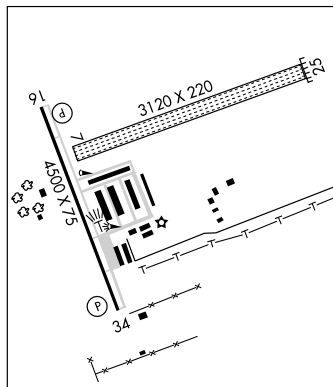

LAMBERT-ST LOUIS INTL (STL)(KSTL) CIV/MIL 10 NW UTC-6(-5DT)

N38°44.92' W90°21.20'

618 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 LRA Class I, ARFF Index D

NOTAM FILE STL

RWY 12R-30L: H11019X200 (CONC-GRVD) S-75, D-200, 2S-175, 2D-350, 2D/2D2-760 HIRL CL

RWY 12R: MALSR. TDZL. PAPI (P4L)—GA 3.0° TCH 69'. Thld dspcd 467'. Road. Rgt tfc.

RWY 30L: REIL. MALSR. PAPI(P4R)—GA 3.0° TCH 58' Thld dspcd 201'. Sign. 0.7% down.

RWY 12L-30R: H9003X150 (CONC-GRVD) S-75, D-200, 2S-175, 2D-350, 2D/2D2-760 HIRL CL

RWY 12L: ALSF2. TDZL. REIL. PAPI (P4R)—GA 3.0° TCH 64'. Building. 0.8% up.

RWY 30R: ALSF2. TDZL. PAPI (P4R)—GA 3.0° TCH 71'. Tower. Rgt tfc. 0.9% down.

RWY 11-29: H9001X150 (CONC-GRVD) S-75, D-200, 2D-325, 2D/2D2-700 HIRL CL

RWY 11: ALSF2. TDZL. PAPI (P4R)—GA 3.0° TCH 57'. 0.7% down.

RWY 29: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 56'. 0.7% up.

RWY 06-24: H7602X150 (CONC-GRVD) S-75, D-176, 2S-175, 2D-280, 2D/2D2-660 HIRL

RWY 06: MALSR. PAPI (P4R)—GA 3.0° TCH 51'. Tree.

RWY 24: MALSR. PAPI (P4L)—GA 3.0° TCH 53'. Sign.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 06: TORA-7602 TODA-7602 ASDA-7352 LDA-7352

RWY 11: TORA-9001 TODA-9001 ASDA-9001 LDA-9001

RWY 12L: TORA-9003 TODA-9003 ASDA-9003 LDA-9003

RWY 12R: TORA-11019 TODA-11019 ASDA-11019 LDA-10562

RWY 24: TORA-7602 TODA-7602 ASDA-7602 LDA-7602

RWY 29: TORA-9001 TODA-9001 ASDA-9001 LDA-9001

RWY 30L: TORA-11019 TODA-11019 ASDA-11019 LDA-10819

RWY 30R: TORA-9003 TODA-9003 ASDA-9003 LDA-9003

ARRESTING GEAR/SYSTEM

RWY 12R HOOK BAK-12A(B) (1090')

HOOK BAK 12A(B) (1300') RWY 30L

RWY 06 HOOK BAK-12A(B) (1450')

MILITARY SERVICE: A-Gear Retractable BAK-12A(B) available Rwy 06, 12R, and 30L. A-Gear are kept in recessed position until req for use. Twr must be notified at least 5 seconds prior to engagement so that cable may be raised.

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

AIRPORT REMARKS: Attended continuously. No practice apch unless authorized by twr and/or arpt authority. Taxiing acft should use caution in early morning and late afternoon. Sun glare may make visual recognition of signs and markings difficult. No designated taxilanes or apron twys located on air carrier ramps. No student solo ops permitted. Waiver to conduct simultaneous apchs to parallel rwys separated by 1,300 ft in effect. ASDE-X surveillance system in use: pilots should operate transponders with mode C on all twys and rwys. Rwy 30L PAPI offset 5° S to accommodate LDA/DME apch to Rwy 30L. Rwy 30R ALSF2 unmonitored except when rwy visual range visibility blo 1800'. Rwy 06 touchdown rwy visual range avbl. Rwy 12L rwy visual range touchdown, midpoint and rollout avbl. Rwy 12R touchdown zone lights OTS indef. Ldg fee. Ldg fee based on acft weight collected by FBO. Flight Notification Service (ADCUS) avbl. NOTE: See Special Notices—Precision Runway Monitor Electronic Scan Radar System (PRM), Simultaneous Offset Instrument Approach (SOIA) Procedure For Pilots Filing Flight Plans, Continuous Power Facilities.

MILITARY REMARKS: ANG No svc at Missouri ANG ramp. Base re-alignment in process.

WEATHER DATA SOURCES: ASOS (C314) 426-0159. LAWRS. LLWAS.

COMMUNICATIONS: SFA D-ATIS 125.025 379.925 UNICOM 122.95

ST LOUIS RCO 122.45 122.6 (ST LOUIS RADIO)

® ST LOUIS APP CON 133.55 338.25 (S-W) 132.125 360.6 (N-E) 123.7

ST LOUIS TWR 118.5 257.7 (South) 120.05 284.6 (North) 132.475 239.275 (West) 278.3 (Rwy 30R) 351.9 (Rwy 30L)

ST LOUIS GND CON 121.9 348.6 (Inbound) 121.65 387.05 (Outbound) 118.925 227.125 (West)

GND METERING 127.55 360.2 (East) 121.075 346.35 (West)

CLNC DEL 119.5 363.1

® ST LOUIS DEP CON 128.1 307.05 (S/W) 119.15 335.5 (N/E) 124.25 126.55 270.35

AIRSPACE: CLASS B See VFR Terminal Area Chart.

RADIO AIDS TO NAVIGATION: NOTAM FILE STL.

ST LOUIS (H) VORTACW 117.4 STL Chan 121 N38°51.64' W90°28.94' 141° 8.5 NM to fld. 450/1E. HIWAS.

CARDINAL (H) VORW/DME 116.45 CSX Chan 111(Y) N38°45.16' W90°21.65' at fld. 530/0E.

OBLIO NDB (LOM) 338 LM N38°48.02' W90°28.48' 122° 5.8 NM to fld.

ZUMAY NDB (LOM) 404 ST N38°47.28' W90°16.73' 241° 4.9 NM to fld.

ILS 111.5 I-BKY Rwy 30L. Class IB LOC unusable byd 25 degrees either side of course.

ILS/DME 111.75 I-RMK Chan 54(Y) Rwy 30L. Class I. GS unusable blo 1780' LOC unusable missed approach inbound.

ILS/DME 111.3 I-SJW Chan 50 Rwy 30R. Class IIIE.

ILS/DME 110.3 I-STL Chan 40 Rwy 24. Class IC. LOM ZUMAY NDB. LOC unusable byd 25 degrees both sides.

ILS/DME 109.7 I-LMR Chan 34 Rwy 12R. Class IB. LOM OBLIO NDB.

ILS 108.9 I-LDZ Rwy 12L. Class IIIE. LOM OBLIO NDB.

ILS/DME 110.3 I-JAK Chan 40 Rwy 06. Class IB LOC unusable inside of .3 NM fm thld. GS unusable byd 5° left of course, byd 7° right of course. DME unusable 12 NM blo 3500'.

ILS/DME 111.95 I-OGZ Chan 56(Y) Rwy 11. Class IIIE.

ILS/DME 111.95 I-RQN Chan 56(Y) Rwy 29. Class IE. GS unusable for coupled approaches.

COMM/NAV/WEATHER REMARKS: A pre-taxi clnc program is in effect. IFR dep are req to contact St Louis Clnc Del no more than 10 minutes prior to taxi time.

SPIRIT OF ST LOUIS (SUS) 17 W UTC-6(-5DT) N38°39.73' W90°39.12'

ST LOUIS

463 B S4 FUEL 100LL, JET A OX 2, 4 TPA-See Remarks LRA Class IV, ARFF Index A H-50, L-27B, A

IAP, AD

RWY 08R-26L: H7486X150 (CONC-GRVD) S-33, D-100, 2S-127

HIRL CL

RWY 08R: MALSR. VASI(V4R)—GA 3.0° TCH 56'. Rgt tfc.

RWY 26L: MALSR. VASI(V4L)—GA 3.0° TCH 40'. Thld dsplcd 481'.

RWY 08L-26R: H5000X75 (ASPH-RFSC) 2D-45.5 MIRL

RWY 08L: PAPI(P4L)—GA 3.0° TCH 41'.

RWY 26R: VASI(V4L)—GA 3.0° TCH 47'. Pole. Rgt tfc.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 08L: TORA-5000 TODA-5000 ASDA-5000 LDA-5000

RWY 08R: TORA-7485 TODA-7485 ASDA-7245 LDA-7245

RWY 26L: TORA-7485 TODA-7485 ASDA-7485 LDA-7004

RWY 26R: TORA-5000 TODA-5000 ASDA-5000 LDA-5000

AIRPORT REMARKS: Attended continuously. Rwy 08R-26L CLOSED to touch and go landing. Numerous and intense helicopter ops on arpt. Be alert; noise sensitive areas to the south of arpt. Arpt CLOSED to acft over 100,000 lbs, except acft 100,000-150,000 lbs for PPR 24 hrs call arpt manager 314-568-0584. Rwy 08L-26R and parallel and connecting twy CLOSED to part 121 air carrier ops. Intersection C CLOSED indef between Twy E and Rwy 08L-26R. PPR 24 hrs for air carrier ops with more than 30 passenger seats, call arpt manager 314-568-0584. Air carrier ops over 9 passenger seats not authorized in excess of 15 min before or after scheduled arrival/departure times except prior coordination with arpt manager for ARFF 314-568-0584. Twy B between SE and NW entrance to west ramp, Twy B NW Twy A from the distance of 200' to 700' and Twy Z not visible by twr. No engine runs after 0400Z without arpt approval. Hi-power run-ups go as directed by ATC, 0601-1200Z use echo run-up pad. Rwy 08R touchdown rwy visual range avbl. HIRL Rwy 08R-26L preset on med ints 0600-1200Z; MIRL Rwy 08L-26R preset on low ints 0600-1200Z to increase ints after 0600Z and ACTIVATE MALSR Rwy 08R and Rwy 26L—CTAF. Tfc pattern altitude Rwy 08R-26L for prop 1700(1237) and for jet 2000(1537), Rwy 08L-26R for prop 1300(837) and for jet 2000(1537). Noise Abatement Procedures: For Dep Stage II acft use Rwy 08L-26R 0400-1300Z except PPR 636-532-2222 Mon-Fri 1400-2300Z, other times call 314-568-0584/0581 or 314-614-9064. Flight Notification Service (ADCUS) avbl Mon-Fri 2300-1430Z, Sat and Sun 24 hrs.

WEATHER DATA SOURCES: ASOS (636) 536-3734. LAWRS.

COMMUNICATIONS: CTAF 124.75 ATIS 134.8 (636) 532-3213 UNICOM 122.95

RCO 122.2 (ST LOUIS RADIO)

® ST LOUIS APP/DEP CON 126.5 CLNC DEL 121.7 (0600-1200Z)

SPIRIT TOWER 124.75 (1200-0600Z) GND CON 121.7 CLNC DEL 133.1

AIRSPACE: CLASS D svc 1200-0600Z other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE STL.

FORISTELL (L) VORTACW 110.8 FTZ Chan 45 N38°41.66' W90°58.27' 092° 15.1 NM to fld. 818/5E.


SNOOP NDB (LOM) 326 SU N38°38.36' W90°46.03' 074° 5.6 NM to fld. Unmonitored.

EAVES NDB (LOM) 227 FZ N38°40.64' W90°32.85' 257° 5.0 NM to fld. Unmonitored. LOC unusable byd 25 degrees both sides.

ILS 111.1 I-SUS Rwy 08R Class IB LOM SNOOP NDB. LOM unmonitored.

ILS 111.1 I-FZU Rwy 26L Class IA LOM EAVES NDB. LOM unmonitored.

COMM/NAV/WEATHER REMARKS: Frequency 121.5 not avbl at twr. Remote arpt advisory service 124.75 avbl when tower closed.

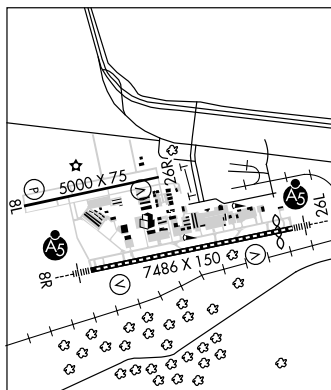

ST LOUIS (ALTON, IL)**ST LOUIS RGNL** (ALN) 4 E UTC-6(-5DT) N38°53.40' W90°02.76'**ST LOUIS**

544 B S4 FUEL 100LL, JET A OX 1, 3 ARFF Index-See Remarks NOTAM FILE ALN

H-5D, L-27C, A

RWY 11-29: H8098X150 (ASPH-GRVD) S-80, D-140, 2S-175, 2D-200 HIRL

IAP

RWY 11: REIL. VASI(V4L)—GA 3.0° TCH 46'. Hangar.

RWY 29: MALSR.

RWY 17-35: H6499X100 (ASPH) S-35, D-47 MIRL

RWY 17: VASI(V4L)—GA 3.0° TCH 45'. Tree.

RWY 35: VASI(V4L)—GA 3.0° TCH 45'. Trees.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 29	17-35	6850
RWY 35	11-29	5100

AIRPORT REMARKS: Attended 1200-0400Z†. For attendant other hrs call 618-259-3230 or 258-1005. Class IV, ARFF Index A. Closed to scheduled air carrier ops with greater than 9 passenger seats and unscheduled air carrier ops greater than 30 passenger seats.

90-day PPR, call arpt manager 618-259-2531. Index E firefighting equipment avbl with 30 minutes notice and prior permission of arpt manager. When twr closed HIRL Rwy 11-29 and MIRL Rwy 17-35 preset on low ints; to increase ints and ACTIVATE MALSR Rwy 29—CTAF.

WEATHER DATA SOURCES: AWOS-3 128.0 (618) 259-7231. LAWRS.**COMMUNICATIONS:** CTAF 126.0 ATIS 128.0 UNICOM 122.95

RCO 122.05 (ST LOUIS RADIO)

Ⓡ APP/DEP CON 124.2 CLNC DEL 120.2 (0400-1300Z†)

RGNL TOWER 126.0 (1300-0400Z†) GND CON 120.2


AIRSPACE: CLASS D svc 1300-0400Z† other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE STL.

TROY (L) VORTACW 116.0 TOY Chan 107 N38°44.35' W89°55.12' 323° 10.9 NM to fld. 570/4E.

CIVIC MEMORIAL NDB (MHW) 263 CVM N38°53.54' W90°03.38' at fld. NOTAM FILE ALN.

ALPOS NDB(LOM) 218 AL N38°51.30' W89°56.28' 291° 5.5 NM to fld.

ILS/DME 108.5 I-ALN Chan 22 Rwy 29 LOM ALPOS NDB. Unmonitored when twr clsd. LOC BC unusable byd 18° left and 23° right of course.

COMM/NAV/WEATHER REMARKS: Freq 121.5 not avbl at twr.

ST LOUIS (CAHOKIA, IL)**ST LOUIS DOWNTOWN**

(CPS) 1 E UTC-6(-5DT) N38°34.24' W90°09.37'

ST LOUIS

413 B S4 FUEL 100LL, JET A OX 1 LRA ARFF Index—See Remarks NOTAM FILE STL H-5D, L-27C, A IAP
RWY 12R-30L: H6997X100 (ASPH) S-43, D-71, 2S-90, 2D-100 MIRL

RWY 12R: REIL. Tree.

RWY 30L: MALSR. VASI(V4L)—GA 3.0° TCH 50'. Pole.

RWY 12L-30R: H3800X75 (CONC) S-30, D-30 MIRL

RWY 12L: REIL. Tree.

RWY 30R: REIL. Tree.

RWY 05-23: H2799X75 (ASPH) S-12 MIRL

RWY 05: Tree.

RWY 23: Tower.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 05: TORA-2799 TODA-2799 ASDA-2799 LDA-2799

RWY 12L: TORA-3800 TODA-3800 ASDA-3800 LDA-3800

RWY 12R: TORA-6997 TODA-6997 ASDA-6997 LDA-6997

RWY 23: TORA-2799 TODA-2799 ASDA-2799 LDA-2799

RWY 30L: TORA-6997 TODA-6997 ASDA-6997 LDA-6997

RWY 30R: TORA-3800 TODA-3800 ASDA-3800 LDA-3800

AIRPORT REMARKS: Attended continuously. Deer and migratory waterfowl on and in/ovf arpt. Be alert: intensive student training, helicopter operations, and frequent blimp operations. Class IV, ARFF Index A. ARFF avbl Mon-Fri 1300-0200Z†. other times by request 618-337-6060. Unscheduled air carrier ops greater than 30 passenger seats require 12 hr prior permission. Mon-Fri (1400-2230Z†) ctc 618-337-6060. After hrs ctc 618-646-8263. Index B ARFF protection provided. Rwy 05-23 not avbl for air carrier ops except taxi ops. Rwy 12L-30R not avbl for air carrier ops except taxi ops. During daylight hours and when twr closed right t/c Rwy 12R and Rwy 30R. MIRL Rwy 12R-30L preset on med ints when tower clsd, MIRL 12L-30R not avbl when tower clsd. ACTIVATE MALSR Rwy 30L when tower clsd—CTAF. Rwy 12R-30L lgts OTS except med ints.

WEATHER DATA SOURCES: ASOS (618) 332-0001. LAWRS.**COMMUNICATIONS:** CTAF 119.925 ATIS 121.45 UNICOM 122.95

® ST LOUIS APP/DEP CON 123.7 CLNC DEL 118.275 (121.8 when twr clsd)

DOWNTOWN TOWER 119.925 (1230-0400Z†) GND CON 121.8


AIRSPACE: CLASS D svc 1230-0400Z† other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE STL.

TROY (L) VORTACW 116.0 TOY Chan 107 N38°44.35' W89°55.12' 224° 15.1 NM to fld. 570/4E.

ACORE NDB (LOM) 350 CP N38°31.19' W90°03.57' 304° 5.5 NM to fld.

ILS 109.1 I-CPS Rwy 30L. Class IA. LOM ACORE NDB. LOC and OM unmonitored when twr clsd.

LOC unusable from 0.2 NM inbound and byd 14° right of course.

COMM/NAV/WEATHER REMARKS: Freq 121.5 not avbl at twr.**ST. LOUIS DOWNTOWN HELIPORT**

(M07) 0 N UTC-6(-5DT) N38°37.52' W90°10.98'

ST. LOUIS

387 NOTAM FILE STL

HELIPAD H1: H37X37 (MATS)

HELIPORT REMARKS: Attended 1500-0100Z†. Svc for acft after hrs avbl for fee, ctc heliport manager. Daylight operations only, night operations not recommended. Call heliport manager before arriving for landing availability due to heavy concentration of air taxi operations. Landing from the south and east are recommended. River barge platform measures approximately 175' by 54'.

COMMUNICATIONS: UNICOM 122.8

SALEM MEM (K33) 4 SW UTC-6(-5DT) N37°36.91' W91°36.27'

1241 B **FUEL** 100LL TPA-2041(800) NOTAM FILE STL

RWY 17-35: H2998X60 (ASPH) S-12.5 MIRL 0.7% up S

RWY 17: REIL. Trees. **RWY 35:** REIL. Trees.

AIRPORT REMARKS: Unattended. Fuel unavbl. Helicopter operations on and invof arpt. Rwy 17-35 NSTD markings. ACTIVATE MIRL Rwy 17-35-CTAF; to increase ints and ACTIVATE REIL Rwy 17 and Rwy 35-CTAF.

COMMUNICATIONS: CTAF 122.9

KANSAS CITY CENTER APP/DEP CON 128.35


RADIO AIDS TO NAVIGATION: NOTAM FILE MAP

MAPLES (L) VORTAC 113.4 MAP Chan 81 N37°35.45' W91°47.32' 074° 9.0 NM to fld. 1370/6E. **HIWAS.**

KANSAS CITY

L-16G

IAP

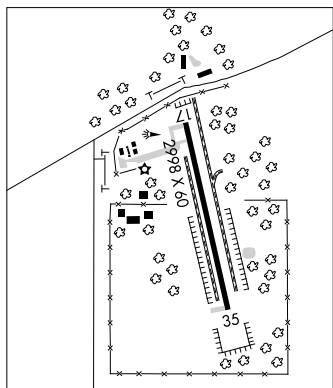

SEDALIA MEM (DMO) 2 E UTC-6(-5DT) N38°42.44' W93°10.55'

909 B S3 **FUEL** 100LL, JET A NOTAM FILE DMO

RWY 18-36: H5500X100 (CONC-WC) S-30, D-48 MIRL 0.4% up S

RWY 18: REIL. PAPI(P2L)-GA 3.0° TCH 37'.

RWY 36: REIL. PAPI(P2L)-GA 3.0° TCH 30'. Tree. Rgt tfc.

RWY 05-23: H3520X50 (ASPH) S-9, D-11.3 0.7% up SW

RWY 05: Tree. **RWY 23:** Tree. Rgt tfc.

AIRPORT REMARKS: Attended Apr-Oct Mon-Fri 1300-0100Z† Nov-Mar Mon-Fri 1300-0000Z†. Jan-Dec Sat-Sun 1400-2200Z†. Wildlife on rws early morning and dusk. Rwy 18-36 approximately 40% of rwy wire combed. Rwy 18 and Rwy 36 REIL OTS indefinitely. ACTIVATE MIRL Rwy 18-36 and REIL Rwy 18 and Rwy 36-CTAF. PAPI Rwy 18 and Rwy 36 on 24 hrs.

WEATHER DATA SOURCES: ASOS 120.525 (660) 826-8225.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.05 (COLUMBIA RADIO)

Ⓡ **WHITEMAN APP CON** 127.45 (Opr 24 hrs from Mon 1300Z† thru Sat 0500Z†, Sat-Sun 1400-2300Z†, clsd holiday) other times ctc **KANSAS CITY CENTER APP/DEP CON** 135.575

Ⓡ **DEP CON** 125.925 (Opr 24 hrs from Mon 1300Z† thru Sat 0500Z†, Sat-Sun 1400-2300Z†, clsd holiday) other times ctc **KANSAS CITY CENTER APP/DEP CON** 135.575

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.


NAPOLEON (L) VORTACW 114.0 ANX Chan 87 N39°05.73' W94°07.73' 110° 50.3 NM to fld. 878/7E.

NDB (MHW) 281 DMO N38°42.26' W93°10.60' at fld.

KANSAS CITY

H-5D, L-27A

IAP

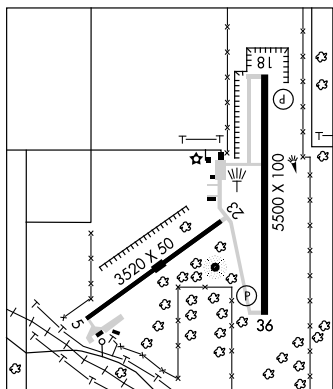

SEYMOUR

OWEN FLD (H58) 3 NE UTC-6(-5DT) N37°11.08' W92°44.26'

1600 NOTAM FILE COU

RWY 01-19: 2800X45 (TURF)

RWY 01: Trees. **RWY 19:** Trees.

RWY 15-33: 1725X25 (TURF)

RWY 15: Trees. **RWY 33:** Trees.

AIRPORT REMARKS: Unattended. Ultralight activity on and invof arpt. Hazardous operating conditions exist at this arpt. Exercise caution when using this facility. Cattle and livestock may be on rws at any time. NSTD rwy safety areas byd each rwy end, incorrect terrain gradients, fences, trees, brush, ditches, crops and bldgs. Wildlife on and invof arpt. Line of sight fm rwy ends obstructed by changes in rwy grade. After heavy rains, call 417-935-2232 for rwy conditions. Rwy 01-19 first 1000' of Rwy 19 has a very steep slope, rwy surface rough, rolling, uneven and narrow with tall obstructions at rwy end. Rwy 15-33 rwy surface rough, rolling, uneven and narrow with tall obstructions at rwy end.

COMMUNICATIONS: CTAF 122.9

KANSAS CITY

SHELBY CO (See SHELBYVILLE)**SHELBYVILLE****SHELBY CO** (6K2) 1 NW UTC-6(-5DT) N39°48.75' W92°03.01'

KANSAS CITY

766 NOTAM FILE COU

RWY 17-35: 2300X46 (TURF)**RWY 17:** Fence. **RWY 35:** Tree.

AIRPORT REMARKS: Unattended. Radio controlled model airplanes on and in/ov arpt and heavy concentration of large waterfowl on and in/ov arpt. NSTD rwy safety areas beyond each rwy end, Rwy 17 has fence 80' from thld, Rwy 35 has large drop off and lake. Rwy 17-35 marked with large yellow cones. Rwy 35 has 5' orange numbers at thld (fair condition).

COMMUNICATIONS: CTAF 122.9**SIKESTON MEM MUNI** (SIK) 2 NE UTC-6(-5DT) N36°53.93' W89°33.71'

ST LOUIS

315 B FUEL 100LL, JET A NOTAM FILE STL

H-6J, L-16H

RWY 02-20: H5502X100 (ASPH) S-30, D-38 MIRL (NSTD)


IAP

RWY 02: VASI(V2L)—GA 3.0° TCH 25'. Trees.**RWY 20:** REIL, VASI(V2L)—GA 3.0° TCH 27'.

AIRPORT REMARKS: Attended Mon-Fri 1300-0100Z±, Sat-Sun 1400-2300Z±. 24-hr automatic credit card fueling system for 100LL. Ultralight activity on and in/ov arpt. Numerous birds in/ov arpt. Rwy 02-20 has cracks with grass growing in them. Twy lgts OTS indef. Rwy 02-20 NSTD MIRL; thld lgts spacing incorrect. Rwy 02 VASI OTS indef. Rwy 20 VASI OTS indef. VASI Rwy 02 and Rwy 20 on 24 hrs. MIRL Rwy 02-20 preset on low ints, to increase ints and ACTIVATE REIL Rwy 20—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.175 (573) 471-7371.**COMMUNICATIONS:** CTAF/UNICOM 122.8**MEMPHIS CENTER APP/DEP CON** 133.65**RADIO AIDS TO NAVIGATION:** NOTAM FILE CGI.**CAPE GIRARDEAU (L) VOR/DME** 112.9 CGI Chan 76 N37°13.65'

W89°34.34' 178° 19.7 NM to fld. 340/1E.

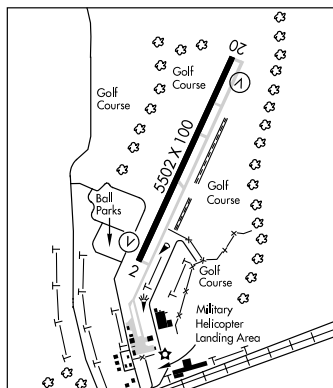**SKYHAVEN** (See WARRENSBURG)**SLATER MEM** (9K5) 1 NW UTC-6(-5DT) N39°13.76' W93°04.37'

KANSAS CITY

860 NOTAM FILE COU

RWY 04-22: 2455X132 (TURF)**RWY 22:** Thld displcd 300'. Road.

AIRPORT REMARKS: Unattended. Rwy 04-22 soft during prolonged wet periods. Model radio controlled acft on and in/ov arpt. Large waterfowl on and in/ov arpt. +1-10' crops along rwy edges from spring to fall. Rwy 04-22 no line of sight between rwy ends. Rwy 04 thld marked with 6 large yellow cones. Rwy 04-22 edges not marked. Rwy 22 displcd thld 4' higher than rwy end. Displcd thld not marked. Thld marked with 6 large yellow cones.

COMMUNICATIONS: CTAF 122.9**SNOOP** N38°38.36' W90°46.03' NOTAM FILE SUS.

KANSAS CITY

NDB (LOM) 326 SU 074° 5.6 NM to Spirit of St. Louis. Unmonitored.**SPIRIT OF ST LOUIS** (See ST LOUIS)

SPRINGFIELD**DOWNTOWN**


(3DW) 0 E UTC-6(-5DT) N37°13.30' W93°14.86'

KANSAS CITY**L-16F**1374 S4 **FUEL** 100LL, JET A NOTAM FILE COU**RWY 11-29:** H4035X50 (ASPH) S-8 MIRL (NSTD)**RWY 11:** Trees. **RWY 29:** Trees.**AIRPORT REMARKS:** Attended Apr-Sep Mon-Sat 1300-0100Z†, Oct-Mar

Mon-Sat 1300-0000Z†. Use caution for powered parachute activity in/ov arpt at or blo 1,000'. CAUTION: +600' lgtd twr 950' north Rwy 29 thld. NSTD rwy safety area byd Rwy 29 thld, large slope. Rwy 11-29 NSTD MIRL, 3 thld lgts each rwy thld, edge lgts spaced 240' apart. Rwy 11 NSTD npi markings; small markings; incorrect spacing and small dashed centerline. Rwy 29 NSTD npi markings; small markings; incorrect spacing and small dashed centerline.

COMMUNICATIONS: CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE SGF.

SPRINGFIELD (H) VORTAC 116.9 SGF Chan 116 N37°21.36' W93°20.04' 149° 9.0 NM to fld. 1240/4E. **HIWAS.**

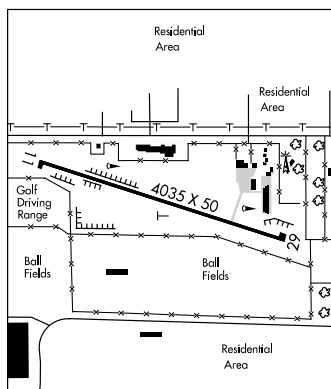**FLYING BAR H RANCH** (MO2) 8 E UTC-6(-5DT) N37°10.51' W93°07.74'**KANSAS CITY**

1375 NOTAM FILE COU

RWY 06-24: 2640X70 (TURF)**RWY 06:** Trees. **RWY 24:** Trees.

AIRPORT REMARKS: Unattended. Wildlife on and in/ov arpt. Large trees at NE end of rwy and large trees on side of rwy at SW end. After heavy rains call 417-887-5483 for rwy conditions. Owner recommends landing and departure to the SW winds permitting. Rwy 06-24 rolling and uneven. NSTD rwy safety area byd each rwy end and along rwy edges, incorrect terrain grades, no overrun at each end, large drop off at Rwy 06 thld.

COMMUNICATIONS: CTAF 122.9

SPRINGFIELD-BRANSON NATL (SGF) 5 NW UTC-6(-5DT) N37°14.74' W93°23.32'

1268 B S4 FUEL 100LL, JET A, OX 1, 2 TPA-See Remarks LRA

ARFF Index—See Remarks NOTAM FILE SGF

RWY 14-32: H8000X150 (ASPH-CONC-GRVD)

S-135, D-170, 2S-175, 2D-300 HIRL

RWY 14: MALS. PAPI(P4R)—GA 3.0° TCH 56'.

RWY 32: REIL. PAPI(P4L)—GA 3.0° TCH 35'.

RWY 02-20: H7003X150 (CONC-GRVD) S-135, D-170, 2S-175, 2D-300 HIRL

RWY 02: MALS. VASI(V4L)—GA 3.0° TCH 54'.

RWY 20: MALS. PAPI(P4L)—GA 3.0° TCH 47'.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 14	02-20	6200
RWY 20	14-32	4550

RUNWAY DECLARED DISTANCE INFORMATION

RWY 02:	TORA-7003	TODA-7003	ASDA-6893	LDA-6893
RWY 14:	TORA-8000	TODA-8000	ASDA-8000	LDA-8000
RWY 20:	TORA-7003	TODA-7003	ASDA-7003	LDA-7003
RWY 32:	TORA-8000	TODA-8000	ASDA-8000	LDA-8000

AIRPORT REMARKS: Attended continuously. Self service fueling station avbl. Use caution for powered parachute activity in/ov Downtown Arpt (7 miles east northeast of SGF) at or blo 1,000'. Birds and wildlife on and in/ov arpt. Oxygen avbl Mon-Fri 1300-1600Z. Class I, ARFF Index B. PPR 24 hours for unscheduled air carrier ops with more than 30 passenger seats call SGF 417-869-1990. ARFF Index B provided 1100-0600Z; avbl on req 0600-1100Z. ARFF index C avbl on request. Rwy 14-32 is 5,400' asph (PFC) and 2,600' conc (GRVD). Rwy 02 touchdown rwy visual range avbl. TPA 2268 (1000) piston acft and 2768 (1500) for jet acft. Flight Notification Service (ADCUS) available.

WEATHER DATA SOURCES: ASOS (417) 863-6158. HIWAS 116.9 SGF. LLWAS.**COMMUNICATIONS:** ATIS 135.125 UNICOM 122.95

RCO 122.1R 116.9T (COLUMBIA RADIO) RCO 122.55 (COLUMBIA RADIO)

Ⓡ APP/DEP CON 124.95 (200°-019°) 121.1 (020°-199°)

TOWER 119.9 GND CON 121.9 CLNC DEL 123.675


AIRSPACE: CLASS C svc continuous.**RADIO AIDS TO NAVIGATION:** NOTAM FILE SGF.

(H) VORTAC 116.9 SGF Chan 116 N37°21.36' W93°20.04' 198° 7.1 NM to fld. 1240/4E. HIWAS.

COOLE NDB (LOM) 404 SG N37°10.81' W93°25.03' 016° 4.2 NM to fld. Unmonitored.

ILS 109.9 I-SGF Rwy 02 Class IB LOM COOLE NDB.

ILS/DME 109.7 I-GWA Chan 34 Rwy 14. Class IE.

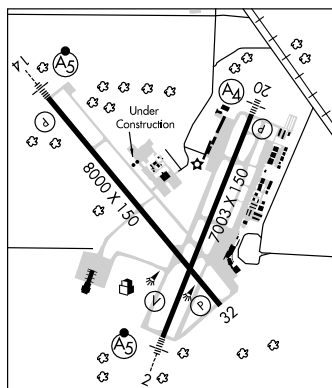**SPRING RIVER** N37°29.22' W94°18.61' NOTAM FILE COU.

NDB (MHW) 356 LLU at Lamar Muni.

KANSAS CITY

L-16F

STEELE MUNI (M12) 2 NW UTC-6(-5DT) N36°05.74' W89°51.57'

258 B NOTAM FILE STL

RWY 18-36: H3985X60 (ASPH) MIRL

RWY 18: Road. RWY 36: Road.

AIRPORT REMARKS: Attended Mon-Fri 1300-2300Z. Parallel twy CLOSED. All twys CLOSED except main twy to ramp. Crop dusting acft on and in vicinity of arpt. ACTIVATE MIRL Rwy 18-36—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE DYR.

DYERSBURG (L) VORTACW 116.8 DYR Chan 115 N36°01.11' W89°19.06' 277° 26.8 NM to fld. 380/3E. HIWAS.

ST LOUIS

L-16H

STOCKTON

STOCKTON LAKE SPB (2M5) 1E UTC-6(-5DT) N37°39.00' W93°45.51'

KANSAS CITY

867 NOTAM FILE COU

Not insp.

WATERWAY ALL WAY: 15000X2000 (WATER)

SEAPLANE REMARKS: Unattended. Seaplanes may not be opr at Stockton Lake SPB sunset-sunrise. Waterway ALL WAY trees and high ground all quadrants. Debris on and invof lake during flooding. No buoys showing ldg area. Call for ice conditions in winter months.

COMMUNICATIONS: CTAF 122.9

STOCKTON MUNI (M03) 3 SW UTC-6(-5DT) N37°39.62' W93°49.01'

KANSAS CITY

1042 B **FUEL** 100LL NOTAM FILE COU

L-16F

RWY 01-19: H3060X50 (ASPH) LIRL (NSTD)

IAP

RWY 01: Trees.

RWY 19: Trees.

AIRPORT REMARKS: Unattended. For fuel call number posted on pumps.


Wildlife on and invof arpt. Insufficient rwy safety area at Rwy 01 end. Large dropoff with rocks and debris and incorrect grade. Rwy 01-19 cracks with vegetation length of rwy. Rwy 01-19 NSTD LIRL, lgts on sides of rwy located 18-30' from pavement. Thld lgts spaced incorrectly.

COMMUNICATIONS: CTAF 122.9

® **SPRINGFIELD APP/DEP CON** 124.95

RADIO AIDS TO NAVIGATION: NOTAM FILE SGF.

SPRINGFIELD (H) VORTAC 116.9 SGF Chan 116 N37°21.36' W93°20.04' 304° 29.4 NM to fld. 1240/4E. **HIWAS.**



SULLIVAN RGNL (UUV) 1N UTC-6(-5DT) N38°14.01' W91°09.86'

KANSAS CITY

933 B S4 **FUEL** 100LL, JET A NOTAM FILE STL Not insp.

L-16G

RWY 06-24: H4500X75 (CONC) S-12.5 MIRL

IAP

RWY 06: PAPI(P2L)—GA 4.0° TCH 28'. Tree.

RWY 24: PAPI(P2L)—GA 3.0° TCH 24'. Tree. Rgt tfc.

AIRPORT REMARKS: Attended 1300-2200Z±. After hours call

573-467-1791. Parachute Jumping on and invof arpt. Rwy 06-24 restricted to acft 12,500 lbs maximum gross weight or less; PPR for acft exceeding 12,500 lbs call arpt manager. Ultralights on and invof arpt. Deer on and invof arpt. MIRL Rwy 06-24 preset on low ints, to increase ints **ACTIVATE**—CTAF. PAPI on 24 hrs.

WEATHER DATA SOURCES: AWOS-3 119.375 (573) 860-2596.

COMMUNICATIONS: CTAF/UNICOM 122.7

KANSAS CITY CENTER APP/DEP CON 128.35


RADIO AIDS TO NAVIGATION: NOTAM FILE VIH.

VICHY (L) VOR/DME 117.7 VIH Chan 124 N38°09.25'

W91°42.41' 073° 26.1 NM to fld. 1110/6E.

NDB (MHW) 356 UUV N38°14.13' W91°09.84' to fld.

Unmonitored 2300-1300Z±. NOTAM FILE STL.

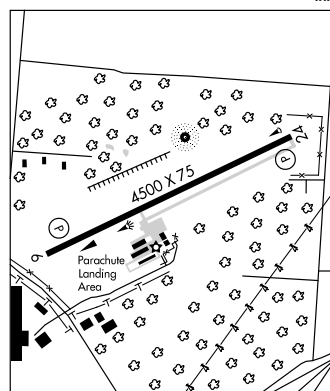

SUNSHINE N38°02.44' W92°36.15' NOTAM FILE COU.

KANSAS CITY

(L) **VOR/DME** 108.4 SHY Chan 21 032° 4.2 NM to Lee C Fine Mem. 910/5E.

L-16G

RCO 122.15 (COLUMBIA RADIO)

TAN TAR A RESORT SPB (See OSAGE BEACH)

TARIO N39°40.55' W94°54.42' NOTAM FILE STJ.

KANSAS CITY

NDB (LOM) 260 ST 355° 5.8 NM to Rosecrans Mem.

TARKIO

GOULD PETERSON MUNI (K57) 1 E UTC-6(-5DT) N40°26.76' W95°22.04'

OMAHA

913 B S2 NOTAM FILE COU

L-10J

RWY 18-36: H3564X60 (CONC) S-3 MIRL

IAP

RWY 18: Thld dspld 330'. Road. **RWY 36:** Trees.

AIRPORT REMARKS: Attended Apr-Oct Mon-Fri 1400-2300Z, Sat 1400-1800Z, Nov-Mar irregularly. Wildlife on and invof arpt. Crop dusting acft on and invof arpt. Dike, fence and p-line N. Rotating bcn OTS indef. To increase ints and ACTIVATE MIRL Rwy 18-36-CTAF.

COMMUNICATIONS: CTAF 122.9

MINNEAPOLIS CENTER APP/DEP CON 119.6

RADIO AIDS TO NAVIGATION: NOTAM FILE STJ.

ST JOSEPH (H) VORTAC 115.5 STJ Chan 102 N39°57.64' W94°55.51' 317° 35.5 NM to fld. 1160/8E.

THAYER MEM (42M) 2 W UTC-6(-5DT) N36°31.34' W91°34.32'

KANSAS CITY

790 B NOTAM FILE COU

L-16G

RWY 09-27: H4200X49 (ASPH) LIRL (NSTD)

RWY 09: Trees. **RWY 27:** Thld dspld 155'. Trees. Rgt tfc.

AIRPORT REMARKS: Unattended. Wild animals on rwy at early and late hours. Rwy 09-27 width variance 49-50'. NSTD rwy safety areas byd Rwy 09 end, incorrect terrain gradients and brush. Rotating bcn out of svc indefinitely. Rwy 09-27 NSTD LIRL, rwy edge and thld lgts placed 15' off edges of pavement. Rwy 27 dspld thld lgts NSTD located 10' W of dspld thld bar, first 160' of dspld thld unlighted at ngt. For LIRL Rwy 09-27 key 122.9 5 times.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE ARG.

WALNUT RIDGE (H) VORTAC 114.5 ARG Chan 92 N36°06.60' W90°57.22' 306° 38.8 NM to fld. 260/4E.

HIWAS.

TRENTON MUNI (TRX) 1 E UTC-6(-5DT) N40°05.01' W93°35.44'

OMAHA

758 B FUEL 100LL NOTAM FILE COU

L-27A

RWY 18-36: H4307X75 (ASPH) MIRL

IAP

RWY 18: REIL. PAPI(P4L)-GA 3.0° TCH 30'. Thld dspld 400'. Road.

RWY 36: REIL. PAPI(P4L)-GA 3.0° TCH 30'. Pole.

AIRPORT REMARKS: Attended Mon-Fri 1330-2230Z. 24 hr fuel avbl, contact arpt manager 660-359-5154; after hrs contact Fire Dept 660-359-5552. Be alert for birds and wildlife on and invof arpt. MIRL Rwy 18-36 and PAPI Rwy 18 and Rwy 36 opr dusk-0330Z, after 0330Z to dusk ACTIVATE MIRL Rwy 18-36, PAPI Rwy 18 and Rwy 36, REIL Rwy 18 and Rwy 36-CTAF. To increase ints and ACTIVATE REIL Rwy 18 and Rwy 36-CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8


RADIO AIDS TO NAVIGATION: NOTAM FILE FOD.

LAMONI (H) VORTAC 116.7 LMN Chan 114 N40°35.81'

W93°58.06' 144° 35.3 NM to fld. 1140/7E. HIWAS.

NDB (MHW) 400 TRX N40°04.82' W93°35.58' at fld.

NOTAM FILE COU.



TRIPLE R (See DEARBORN)

TWIN CITY AIRPARK (See MARBLE HILL)

UNIONVILLE MUNI (K43) 3 N UTC-6(-5DT) N40°32.41' W93°01.53'

OMAHA

1046 B NOTAM FILE COU

RWY 17-35: H2805X49 (ASPH-AFSC) LIRL

RWY 17: Ground. **RWY 35:** Trees. Rgt tfc.

AIRPORT REMARKS: Unattended. Rwy 17-35 width variance 49-50'. Rwy 17-35 large cracks across entire length of rwy. Rotating bcn OTS indef. ACTIVATE LIRL Rwy 17-35 and rotating bcn-CTAF, 3 clicks on and 2 clicks off.

COMMUNICATIONS: CTAF 122.9

VAN BUREN**BOLLINGER—CRASS MEM** (M05) 1 N UTC−6(−5DT) N37°00.56' W91°00.41'**KANSAS CITY**

647 NOTAM FILE STL

RWY 02–20: H2600X50 (ASPH–RFSC) LIRL**RWY 02:** Brush. **RWY 20:** Trees.

AIRPORT REMARKS: Unattended. Deer and wildlife on and in/ov arpt. Night ops not recommended. Rwy 02–20 large cracks with grass and weeds growing in them. Rough surface. Apron in poor condition, loose aggregate and cracks. NSTD rwy safety area along sides of rwy and byd Rwy 20 end. Large drop-offs, incorrect terrain gradients, brush and trees. Rwy 02–20 many edge and thld lghts broken and missing. Rwy 02–20 LIRL OTS indef.

COMMUNICATIONS: CTAF 122.9**VERSAILLES****ROY OTTEN MEM AIRFIELD** (3VS) 2 W UTC−6(−5DT) N38°25.70' W92°52.52'**KANSAS CITY**1030 B S2 **FUEL** 100LL NOTAM FILE COU**RWY 07–25:** H2805X39 (ASPH) LIRL (NSTD)**RWY 07:** Brush. **RWY 25:** Road. Rgt tfc.

AIRPORT REMARKS: Attended 1400–2300Z†. Crop dusting acft, helicopters and ultralight activity on and in/ov arpt. Deer and wildlife on and in/ov arpt. NSTD rwy safety area beyond each rwy end, incorrect terrain grades, large drop off at Rwy 07 end, road at Rwy 25 end. Rwy 07–25 width variance 39–40'. Rwy 07–25 line of sight obstructed by grade change in rwy. Rwy 07–25 NSTD LIRL, thld lghts green and spaced incorrectly, thld and edge lghts placed 11–18' from rwy edge.

COMMUNICATIONS: CTAF/UNICOM 122.8**HELIPAD H1:** H50X50 (CONC)**H1:** Trees.

HELIPORT REMARKS: Rwy H1 perimeter lghts. Rwy H1 +45' trees, 380' NW of final approach and takeoff area, 8:1 approach slope, +52' trees, 155' SE of final approach and takeoff area, 2:1 approach slope.


VICHY N38°09.25' W91°42.41' NOTAM FILE VIH.**KANSAS CITY**(L) **VOR/DME** 117.7 **VIH** Chan 124 236° 3.4 NM to Rolla National. 1110/6E.**H–5D, L–16G****RCO** 122.1R 117.7 T (COLUMBIA RADIO)**RCO** 122.35 (COLUMBIA RADIO)**WARRENSBURG****SKYHAVEN** (RCM) 3 NW UTC−6(−5DT) N38°47.05' W93°48.17'**KANSAS CITY**798 B S2 **FUEL** 100LL, JET A NOTAM FILE COU**L–27A****RWY 18–36:** H4206X75 (ASPH) S–21, D–26 MIRL**IAP****RWY 18:** REIL. PAPI(P4R)—GA 3.0° TCH 40'. Trees. Rgt tfc.**RWY 36:** REIL. PAPI(P4L)—GA 3.0° TCH 36'. Tree.**RWY 13–31:** H2801X60 (ASPH) S–12.5 0.4% up NW MIRL**RWY 13:** REIL. Trees. Rgt tfc. **RWY 31:** REIL. Road.

AIRPORT REMARKS: Attended Mon–Fri 1300–0200Z†, Sat–Sun 1400–0000Z†. Self svc fuel avbl with credit cards only. Glider operations at arpt. Wildlife on and in/ov arpt. Calm wind Rwy 36. South 100' of apron and exit ramp located 1250' N of Rwy 36 thld has same pavement strength as Rwy 18–36, remainder of apron not full strength. Limited sight distance fm Rwy 13 thld area to Rwy 18 thld and from Rwy 18 thld to Rwy 31 thld area. **ACTIVATE** MIRL Rwy 13–31 and Rwy 18–36, PAPI Rwy 18, REIL Rwy 18, Rwy 36, Rwy 13, Rwy 31—CTAF. PAPI Rwy 36 on 24 hrs.

WEATHER DATA SOURCES: AWOS–3 119.575 (660) 422–7010.**COMMUNICATIONS:** CTAF/UNICOM 123.0

Ⓡ **WHITEMAN APP CON** 127.45 (Opr 24 hrs from Mon 1300Z† thru Sat 0500Z†, Sat–Sun 1400–2300Z†, clsd holiday) other times ctc **KANSAS CITY CENTER APP/DEP CON** 135.575

Ⓡ **WHITEMAN DEP CON** 125.925 (Opr 24 hrs from Mon 1300Z† thru Sat 0500Z†, Sat–Sun 1400–2300Z†, clsd holidays) other times ctc **KANSAS CITY CENTER APP/DEP CON** 135.575

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.**NAPOLEON (L) VORTACW** 114.0 **ANX** Chan 87 N39°05.73' W94°07.73' 134° 24.1 NM to fld. 878/7E

WARSAW**HARRY S TRUMAN DAM AND RESERVOIR SPB** (75U) 1E UTC-6(-5DT)

KANSAS CITY

N38°13.00' W93°25.01'

706 NOTAM FILE COU

WATERWAY ALL WAY: 15000X4000 (WATER)

SEAPLANE REMARKS: Unattended. Waterway All Way trees and high ground all quadrants. Waterway ALL WAY Idgs allowed any direction in designated areas only. Seaplane base is located under the Truman C MOA base 500' AGL. Contact WHITEMAN APP on freq 127.45. Debris on and in vicinity of lake during floodings. No buoys showing Idg area. Remain 1000' clear of dam or any bridge. Call for ice conditions in winter months.

COMMUNICATIONS: CTAF 122.9**WARSAW MUNI** (RAW) 6 N UTC(-5DT) N38°20.81' W93°20.73'

KANSAS CITY

936 B FUEL 100LL NOTAM FILE COU

L-27A

Rwy 18-36: H3300X60 (CONC) D-12.5 MIRL

AIRPORT REMARKS: Unattended. Fuel avbl 24 hr self serve. Wildlife on and invof arpt. Pavement edge drop-offs along the north edge of the twy serving the apron exceed 6" in various locations. ACTIVATE MIRL Rwy 18-36—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.325 (660) 547-3761.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE COU.

SUNSHINE (L) VORW/DME 108.4 SHY Chan 21 N38°02.44' W92°36.15' 293° 39.7 NM to fld. 910/5E.

WASHINGTON CO (See POTOSI)**WASHINGTON RGNL** (FYG) (KFYG) 3 N UTC-6(-5DT) N38°35.26' W90°59.63'

ST LOUIS

488 B S2 FUEL 100LL NOTAM FILE STL

H-5D, L-27B

Rwy 15-33: H5001X75 (CONC) S-30 MIRL

IAP

Rwy 15: REIL. PAPI(P4L)—GA 3.0° TCH 42'. Trees. Rgt tfc.**Rwy 33:** REIL. PAPI(P4L)—GA 3.0° TCH 40'. Tree.

AIRPORT REMARKS: Attended Nov-Mar 1400-2300Z†, Apr-Oct 1400-0000Z†. Wildlife on and invof of arpt. Power plant maintenance on limited basis. MIRL Rwy 15-33 preset on medium intensity dusk to 0600Z†, to increase intensity and ACTIVATE MIRL Rwy 15-33 and REIL Rwy 15 and Rwy 33—CTAF. PAPI Rwy 15 and Rwy 33 on 24 hrs.


WEATHER DATA SOURCES: AWOS-3 121.325 (636) 433-5914.**COMMUNICATIONS:** CTAF/UNICOM 122.8

® ST LOUIS APP/DEP CON 126.5

RADIO AIDS TO NAVIGATION: NOTAM FILE STL.

FORISTELL (L) VORTACW 110.8 FTZ Chan 45 N38°41.66'

W90°58.27' 184° 6.5 NM to fld. 818/5E.

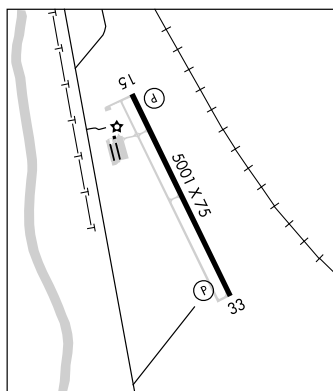**WAYNESVILLE-ST. ROBERT RGNL FORNEY FLD** (See FORT LEONARD WOOD)

WEST PLAINS MUNI (UNO) 10 NW UTC-6(-5DT) N36°52.71' W91°54.16'

KANSAS CITY

1228 B FUEL 100LL, JET A NOTAM FILE UNO

H-6J, L-16G

RWY 18-36: H5102X75 (ASPH) S-30, D-39 MIRL

IAP

RWY 18: REIL. PAPI(P2L)—GA 3.0° TCH 37'. Trees.

RWY 36: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Trees.

AIRPORT REMARKS: Attended 1400-2300Z†. For attendant after 2300Z† call 417-257-1539 or 417-256-3865. Helicopter ops and training on and in/ovf arpt. Ultralights on and in vicinity of arpt. ACTIVATE MIRL Rwy 18-36, PAPI Rwy 18 and Rwy 36 and REIL Rwy 18 and 36 after 0400Z†—CTAF.

WEATHER DATA SOURCES: ASOS 123.825 (417) 257-1313.


COMMUNICATIONS: CTAF/UNICOM 122.8.

RCO 122.15 (COLUMBIA RADIO)

MEMPHIS CENTER APP/DEP CON 120.075

RADIO AIDS TO NAVIGATION: NOTAM FILE UNO.

HUTTON (L) VORW/DME 111.6 HUW Chan 53X N36°52.28' W91°54.00' at fld. 1220/2E.



WHITEMAN AFB (SZL)(KSZL) AF (ARNG AFRC) 2 S UTC-6(-5DT)

KANSAS CITY

N38°43.82' W93°32.87'

H-5C, L-27A

870 B TPA—See Remarks NOTAM FILE COU Not insp.

DIAP, AD

RWY 01-19: H12400X200 (CONC) S-150, D-220, 2S-175, 2T-585, 2D-426, 2D/2D2-840

PCN 72 R/B/W/T HIRL

RWY 01: ALSF1. PAPI.

RWY 19: ALSF1. PAPI.

MILITARY SERVICE: LGT PAPI restricted to 5° left or right of Rwy 01-19 centerline. Rwy 19 PAPI glide slope and ILS glide slope not coincidental. **JASU 2(A/M32A-86D) 1(AM32-95) FUEL J8. FLUID LPOX OIL SOAP**
TRAN ALERT Opr Mon-Thu 1400-0400Z†, Fri 1400-0300Z†, weekends 1400-2200Z†, clsd holidays. Limited de-icing of tran acft avbl. Fleet svc not avbl. Transient svc avbl for F16 acft, except the sensor chip inspection unavbl.

MILITARY REMARKS: Opr 24 hrs, from Mon 1300Z† thru Sat 0500Z†, Sat-Sun 1400-2300Z†, clsd holidays. See FLIP AP/1 Supplementary Arpt information. **RSTD 24-48** hr PPR, DSN 975-1861, issued PPR valid for 1 hr prior/after ETA. Early/late arr/dep must re-coordinate. B52 opr only on rwy, other airfield areas rqr OG/CC approval. No over flight weapons storage area located ESE of rwy and city of Knob Noster located 1.5 NM NNW of fld. Acft with VIP etc Base OPS 30 min prior to ldg. Ctc twr 10 min prior to ldg. **CAUTION 112' AGL twr 4000'** directly West/abeam Rwy 01 thld. Possible illusion of being high on final during night VFR apch to Rwy 01. Local acft fly 300 Kt in overhead pattern. West end of Twy B not visible from twr. Ctc ATIS, Twr or PTD for info. Bird haz. **TFC PAT** TPA-Helicopter 1400(530), rectangular 1900(1030), overhead 2400(1530). **MISC** Base OPS DSN 975-3101, C660-687-3101. During NOTAM snow removal operations or forecasted wx events ctc AMOPs at DSN 975-3101 or COMM 660-687-3101 for most current afld status. Wx Observations Visibility restrictions: Direct view of the runway is blocked by the B-2 maintenance docks. Visibility is further restricted by S-35 and buildings southward on the west side of the flight line and from by building 33 and buildings on the west side of the flight line. 20' pole 185' south of Twy C east. Class D Airspace effective Mon 1200-0400Z†, Fri 1300-2200Z†, Sat-Sun, Clsd hol other times CLASS E. Drag chutes and repack capabilities not avbl. No COMSEC avbl. ACC acft expect std reduced rwy separation (RRS). Tran ACC acft must notify twr on initial ctc if RRS is not desired. Wx opr 24 hrs, from Mon 0600Z† thru Fri 0500Z†, Sat-Sun 1300-2300Z†, clsd holidays. Wx DSN 975-3062, C660-687-3062. Wx ops aircrews can receive wx briefing from 26 OWS at DSN 331-2651, C318-529-2651, Afld Wx is monitored by AN/FMQ-19 ASOS and augmented by human observer only during indicated hrs of operations. **ARNG** Opr Mon-Fri 1400-2230Z†, DSN 975-5771.

COMMUNICATIONS: ATIS 118.725 239.025 (Mon-Fri 1200-0400Z†, Sat-Sun 1300-2200Z†, clsd holidays) **PTD 372.2**

Ⓡ **APP CON** 127.45 284.0 (Opr 24 hr from Mon 1300Z† thru Sat 0500Z†, Sat-Sun 1400-2300Z†, clsd holidays) other times ctc

Ⓡ **KANSAS CITY CENTER APP/DEP CON** 135.575

TOWER 132.4 255.6 (Opr 24 hr from Mon 1300Z† thru Sat 0500Z†, Sat-Sun 1400-2300Z†, clsd holidays.)

GND CON 128.275 275.8 **CLNC DEL** 121.75 335.8

Ⓡ **DEP CON** 125.925 343.65 (Opr 24 hr Sat 0500Z† thru Mon 1300Z†, Sat-Sun 2300-1400Z†, holidays) other times ctc

Ⓡ **KANSAS CITY CENTER APP/DEP CON** 135.575

COMD POST 311.0 321.0 **PMSV METRO** 344.6 **303 TFS OPS** (GROUND HOG) 227.8 **HAWK OPS** 139.0 242.4 49.65

AIRSPACE: CLASS D svc Opr (24 hrs Mon 1300Z† thru Sat 0500Z†, Sat-Sun 1400-2300Z†, clsd holidays), other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

(L) **TACAN** Chan 35 **SZL** (109.8) N38°44.15' W93°33.03' at fld. 850/4E. No NOTAM MP Mon 0700-1300Z†.

ILS 110.3 **I-SZL** Rwy 01. No NOTAM MP Tue, Thu 0700-1300Z†.

ILS 108.5 **I-MXJ** Rwy 19. No NOTAM MP Wed-Thu 1200-1500Z†.

ASR (Mon-Fri 1200-0400Z†, Sat-Sun 1300-2200Z†, clsd holidays)

COMM/NAV/WEATHER REMARKS: Radar see Terminal FLIP for Radar Minima.

WILLOW SPRINGS MEM

(1H5) 1 E UTC-6(-5DT) N36°59.38' W91°57.25'

KANSAS CITY

1247 FUEL 100LL TPA-2047(800) NOTAM FILE COU

L-16G

RWY 17-35: H3502X60 (ASPH) MIRL 0.7% up N.

RWY 17: Trees.

RWY 35: Trees.

AIRPORT REMARKS: Unattended. For fuel call 417-469-3158 (Police Dept.) Deer and wild turkey on and in vicinity of arpt early and late hours. Ultralight activity on and invof arpt. ACTIVATE MIRL Rwy 17-35-CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE COU.

MAPLES (L) VORTAC 113.4 MAP Chan 81 N37°35.45' W91°47.32' 186°36.9 NM to fld. 1370/6E. **HIWAS.**

ZODIA

N38°43.00' W92°16.10' NOTAM FILE COU.

KANSAS CITY

NDB (LOM) 407 CO 018° 6.5 NM to Columbia Rgnl. Unmonitored when twr clsd.

ZUMAY

N38°47.28' W90°16.73' NOTAM FILE STL.

ST LOUIS

NDB (LOM) 404 ST 238° 4.5 NM to Lambert-St Louis Intl.

2010 U.S. & CANADIAN MILITARY AERIAL AIRCRAFT/PARACHUTE DEMONSTRATIONS

During calendar year 2010, the U.S. and Canadian Military Aerial Demonstration Teams (Thunderbirds, Blue Angels, Snowbirds, and Golden Knights) will be performing on the dates and locations listed below.

Pilots should expect Temporary Flight Restrictions (TFR) in accordance with 14 CFR Section 91.145, Management of aircraft operations in the vicinity of aerial demonstrations and major sporting events. The dimensions and effective times of the TFRs may vary based upon the specific aerial demonstration event and will be issued via the U.S. NOTAM system. Pilots are strongly encouraged to check FDC NOTAMs to verify they have the most current information regarding these airspace restrictions.

The currently scheduled 2010 aerial demonstration locations, subject to change without notice, are:

DATE:	USAF Thunderbirds	USN Blue Angels	USA Golden Knights	Canadian Snowbirds
September 25-26	McConnell AFB, KS	MCAS Kaneohe Bay, HI		Chico, CA
October 1-3		MCAS Miramar, CA		MCAS Miramar, CA
2-3	Salinas, CA		MCAS Miramar, CA	
2-3			Jackson, MS	
9-10	Little Rock AFB, AR	San Francisco, CA	Little Rock, AFB, AR	Daytona Beach, FL
16-17	El Paso, TX	Dobbins AFB, GA	El Paso, TX	Atlanta, GA
23-24	Houston, TX	NAS Jacksonville, FL	Washington, DC	
30-31	Cocoa Beach, FL	Ft Worth Alliance, TX	Ft Worth Alliance, TX	
November 6-7	Lackland AFB, TX	Homestead ARB, FL	Lackland AFB, TX	
6-7			Homestead ARB, FL	
11-14			Ft Bragg, NC	
12-13		NAS Pensacola, FL		
13-14	Nellis AFB, NV			

Note: Dates and locations are scheduled "show dates" only and do not reflect arrival or practice date TFR periods that may precede the specific aerial demonstration events listed above. Again, pilots are strongly encouraged to check FDC NOTAMs to verify they have the most current information regarding any airspace restrictions.

The Eastern Iowa Airport Temporary Rwy 08-26

Starting June 3, 2010, The Eastern Iowa Airport will close Rwy 09-27 for reconstruction. The airport will commission the existing parallel Twy A into temporary Rwy 08-26. Use of Rwy 08-26 will relocate aircraft operations 500 feet north, toward the airport terminal and facilities operations area. The following are general construction phases:

June 3, 2010, Rwy 08-26 opens; Rwy 09-27 closed for construction; first 1,000' of rwy end 27 converted to twy.

On or about July 5, 2010, Rwy 13-31 closed for construction of Rwy 13-31 and Rwy 09-27 intersection; Rwy 08-26 will remain open.

On or about July 30, 2010, Rwy 13-31 reopens; Rwy 09-27 remains closed for continued construction; Rwy 08-26 will remain open.

On or about September 23, 2010, Rwy 09-27 reopens; Rwy 08-26 closed for conversion to Twy A, Rwy 13-31 will remain open.

More information can be found on The Eastern Iowa website at <http://www.craairport.org>.

SEARCH LIGHT SHOW

Rosebud Casino, Valentine, Nebraska

Searchlight Activity will be conducted in an area within a 1 NM radius of 42 59 56N/100 34 29W (ANW315/36.5), 1500 AGL and above, from 1900 to 0200 local hours nightly. Searchlight beams may be injurious to pilots/passengers eyes at 1500 AGL and above. Flash blindness or cockpit illumination may occur at greater distances, up to several miles from the source. Huron AFSS, 866-732-1331, is the FAA coordination facility.

SPECIAL NORTH ATLANTIC, CARIBBEAN AND PACIFIC AREA COMMUNICATIONS

VHF air-to-air frequencies enable aircraft engaged in flights over remote and oceanic areas out of range of VHF ground stations to exchange necessary operational information and to facilitate the resolution of operational problems.

Frequencies have been designated as follows:

North Atlantic area:	123.45 MHz
Caribbean area:	123.45 MHz
Pacific area:	123.45 MHz

MILITARY TRAINING ROUTES

The DOD Flight Information Publication AP/1B provides textual and graphic descriptions and operating instructions for all military training routes (IR, VR, SR) and refueling tracks/anchors. Complete and more comprehensive information relative to policy and procedures for IRs and VRs is published in FAA Handbook 7610.4 (Special Military Operations) which is agreed to by the DOD and therefore directive for all military flight operations. The AP/1B is the official source of route data for military users.

AEROBATIC PRACTICE AREA

FORT SCOTT MUNICIPAL AIRPORT (FSK), FORT SCOTT, KS

Aerobatic practice will be conducted within 1 NM radius of Fort Scott Municipal Airport (FSK), SFC to 5,000 feet AGL. The practice area is for waiver holders only. Pilots should use caution when operating in this area. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

HAROLD KRIER FIELD (K58), ASHLAND, KS

Aerobatic practice will be conducted within 2 NM radius of Harold Krier Field (K58), SFC to 3,500 feet AGL. The practice area is for waiver holders only. Pilots should use caution when operating in this area. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

WAMEGO MUNICIPAL AIRPORT (69K), MANHATTAN, KS

Aerobatic practice will be conducted within 1 NM radius of Wamego Municipal Airport (69K) SFC to 4,500 feet MSL, SR-SS. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

GRANITE FALLS MUNI/LENZEN-ROE, AIRPORT, (GDB) GRANITE FALLS, MN

Aerobatic practice will be conducted within 2 NM radius of MVE160012, SFC to 6,000 feet MSL, SR-SS. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

WASECA MUNICIPAL AIRPORT (ACQ), WASECA, MN

Aerobatic practice will be conducted within 1 NM radius of Waseca Municipal Airport (ACQ), 500 feet AGL to 4,000 feet MSL. The practice area is for registered users only. Pilots should use caution when operating in this area. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

SEWARD COUNTY AIRPORT (SWT), SEWARD, NE

Aerobatic practice will be conducted within 1 NM radius of Seward County Airport (SWT), SFC to 7,000 feet MSL. The practice area is for waiver holders only. Pilots should use caution when operating in this area. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

PIERRE REGIONAL AIRPORT (PIR), PIERRE, SD

Aerobatic practice will be conducted within 2 NM radius of Pierre Regional Airport (PIR, SFC to 3,300 feet MSL. The practice area is for waiver holders only. Pilots should use caution when operating in this area. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

SKIE-LINCOLN AIRPORT (Y14), TEA, SD

Aerobatic practice will be conducted within 1 NM radius of Skie-Lincoln County Airport (Y14), SFC to 5,000 feet MSL. The practice area is for waiver holders only. Pilots should use caution when operating in this area. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

MODEL ROCKET ACTIVITY

ANTHONY, KS

Model Rocket activity will be conducted within a 5 NM radius of ANY081021, SFC to 34,500 feet AGL, SR-SS. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

ELLINWOOD, KS

Model Rocket activity will be conducted within a 3 NM radius of the Ellinwood Airport (1K6), with an alternate site of 2 NM Northwest of Ellinwood Airport (1K6), SFC to 10,000 feet AGL, SR-SS. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

PITTSBURG, KS

Model Rocket activity will be conducted within a 3 NM radius of OSW045034, SFC to 18,000 feet MSL, SR-SS. For further information, contact Flight Services at 1-800-WX-BRIEF (992-7433).

HALLSVILLE, MO

Model Rocket activity will be conducted within a 2 NM radius of HLV299010, SFC to 6,000 feet AGL, SR-SS. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

CIVIL USE OF MILITARY FIELDS:

U.S. Army, Air Force, Navy and Coast Guard Fields are open to civil fliers only in emergency or with prior permission.

Army installations, prior permission is required from the Commanding Officer of the installation.

For Air Force installations, prior permission should be requested at least 30 days prior to first intended landing from either Headquarters USAF (PRPOC) or the Commander of the installation concerned (who has authority to approve landing rights for certain categories of civil aircraft). For use of more than one Air Force installation, requests should be forwarded direct to Hq USAF (PRPOC), Washington, D.C. 20330.

Use of USAF installations must be specifically justified.

For Navy and Marine Corps installations, prior permission should be requested at least 30 days prior to first intended landing. An Aviation Facility License must be approved and executed by the Navy prior to any landing by civil aircraft.

Forms and further information may be obtained from the nearest U.S. Navy or Marine Corps aviation activity.

For Coast Guard fields prior permission should be requested from the Commandant, U.S. Coast Guard via the Commanding Officer of the field.

When instrument approaches are conducted by civil aircraft at military airports, they shall be conducted in accordance with the procedures and minimums approved by the military agency having jurisdiction over the airport.

AIRCRAFT LANDING RESTRICTIONS

Landing of aircraft at locations other than public use airports may be a violation of Federal or local law. All land and water areas are owned or controlled by private individuals or organizations, states, cities, local governments, or U.S. Government agencies. Except in emergency, prior permission should be obtained before landing at any location that is not a designated public use airport or seaplane base.

Landing of aircraft is prohibited on lands or waters administered by the National Park Service, U.S. Fish and Wildlife Service, U.S. Forest Service, and on many areas controlled by the U.S. Army Corps of Engineers, unless prior authorization is obtained from the respective agency.

CONTROLLED FIRING
Parsons, Kansas
(Until Further Notice)

Controlled Firing Area 1 NM radius 37°17'39"N/95°08'46"W, SFC-3200 MSL, Eff weekdays 0630-1700 LCL

INTERSECTION DEPARTURES DURING PERIOD OF DARKNESS
MINNEAPOLIS-ST PAUL INTERNATIONAL/WOLD-CHAMBERLAIN AIRPORT (MSP)
MINNEAPOLIS, MINNESOTA

Minneapolis International Airport Traffic Control Tower has been granted a waiver to the guideline that prohibits the control tower from taxiing an aircraft into "position and hold" at an intersection, between sunset and sunrise.

This waiver allows the tower to taxi the aircraft into "position and hold" during period of darkness, at the intersections listed below.

Runway 4 at Taxiways "S", "C2", "C3", "M2", or "M3"

Aircraft shall not taxi into position and hold under the provisions of this waiver when the subject intersection is not visible from the tower. When the provisions of this waiver are being exercised, the affected runway shall be used for departures only. Intersection departures will continue to be utilized at other locations between sunset and sunrise. However, aircraft cannot be taxied into "position and hold" prior to takeoff clearance.

LAMBERT-ST LOUIS INTERNATIONAL (STL), MISSOURI

STL Precision Runway Monitor Electronic Scan Radar System (PRM) commissioned. Full utilization of PRM is pending the future implementation of simultaneous instrument approaches. Until then no operational impact will result from the commissioning of PRM.

SIMULTANEOUS OFFSET INSTRUMENT APPROACH (SOIA) PROCEDURE FOR PILOTS
FILING FLIGHT PLANS TO LAMBERT-ST LOUIS INTERNATIONAL AIRPORT (STL)

Effective Thursday, October 27, 2005. During the hours of 0700-2200 local, STL ATC may utilize LDA PRM and ILS PRM approaches as weather and traffic demand dictate. Aircraft arriving from the northeast and northwest (primarily over PETTI and LORLE intersections) should expect ILS PRM Runway 30R. Aircraft arriving from the west and southeast (primarily over FTZ and QBALL) should expect LDA PRM Runway 30L. If unable to participate in PRM apchs acft operators are required to contact FAA ATCSCC directly at 1-800-333-4286 or 703-904-4452 prior to departure to obtain a precoordinated arrival time. Non-participating acft may encounter delays. Pilot requirements and procedures are outlined in U.S. Terminal Procedures Publications available on pages entitled "ATTENTION ALL USERS OF ILS PRECISION RUNWAY MONITOR (PRM)" or "ATTENTION ALL USERS OF LDA PRECISION RUNWAY MONITOR (PRM)". This notice is effective until further notice.

CONTINUOUS POWER FACILITIES

In order to insure that a basic ATC system remains in operation despite an areawide or catastrophic commercial power failure, key equipment and certain airports have been designated to provide a network of facilities whose operational capability can be utilized independent of any commercial power supply.

In addition to those facilities comprising the basic ATC system, the following approach and lighting aids have been included in this program for a selected runway.


1. ILS (Localizer, Glide Slope, COMLO, Inner, Middle and Outer Markers)
2. Wind Measuring Capability
3. Approach Light System (ALS) or Short ALS (SALS)
4. Ceiling Measuring Capability
5. Touchdown Zone Lighting (TDZL)
6. Centerline Lighting (CL)
7. Runway Visual Range (RVR)
8. High Intensity Runway Lighting (HIRL)
9. Taxiway Lighting
10. Apron Light (Perimeter Only)

The following have been designated "Continuous Power Airports," and have independent back up capability for the equipment installed.

Airport/Ident	Runway No.	Airport/Ident	Runway No.
Albuquerque, NM (ABQ)	08	Milwaukee, WI (MKE)	01L
Anchorage, AK (ANC)	07R	Minneapolis, MN (MSP)	30L
Andrews AFB, MD (ADW)	01L	Nashville, TN (BNA)	02L
Atlanta, GA (ATL)	09R	New Orleans, LA (MSY)	10
Baltimore, MD (BWI)	10	New York, NY (JFK)	04R
Bismarck, ND (BIS)	31	New York, NY (LGA)	22
Boise, ID (BOI)	10R	Newark, NJ (EWR)	04R
Boston, MA (BOS)	04R	Oklahoma City, OK (OKC)	35R
Charlotte, NC (CLT)	36L	Omaha, NE (OMA)	14R
Chicago, IL (ORD)	10	Ontario, CA (ONT)	26L
Cincinnati, OH (CVG)	36C	Philadelphia, PA (PHL)	09R
Cleveland, OH (CLE)	06R	Phoenix, AZ (PHX)	08
Dallas/Fort Worth, TX (DFW)	17C	Pittsburgh, PA (PIT)	10L
Denver, CO (DEN)	35R	Reno, NV (RNO)	16R
Des Moines, IA (DSM)	31	Salt Lake City, UT (SLC)	34L
Detroit, MI (DTW)	03R	San Antonio, TX (SAT)	12R
El Paso, TX (ELP)	22	San Diego, CA (SAN)	09
Fairbanks, AK (FAI)	01L	San Francisco, CA (SFO)	28R
Great Falls, MT (GTF)	03	San Juan, PR (SJU)	08
Honolulu, HI (HNL)	08L	Seattle, WA (SEA)	16C
Houston, TX (IAH)	26L	St. Louis, MO (STL)	30R
Indianapolis, IN (IND)	05L	Tampa, FL (TPA)	36L
Jacksonville, FL (JAX)	07	Tulsa, OK (TUL)	36R
Kansas City, MO (MCI)	19R	Washington, DC (DCA)	01
Los Angeles, CA (LAX)	24R	Washington, DC (IAD)	01R
Memphis, TN (MEM)	36L	Wichita, KS (ICT)	01L
Miami, FL (MIA)	08R		

NOTE—The existing CPA runway is listed. Pending and future changes at some locations will require a revised runway designation.

FIREFIGHTING TRAFFIC AREAS

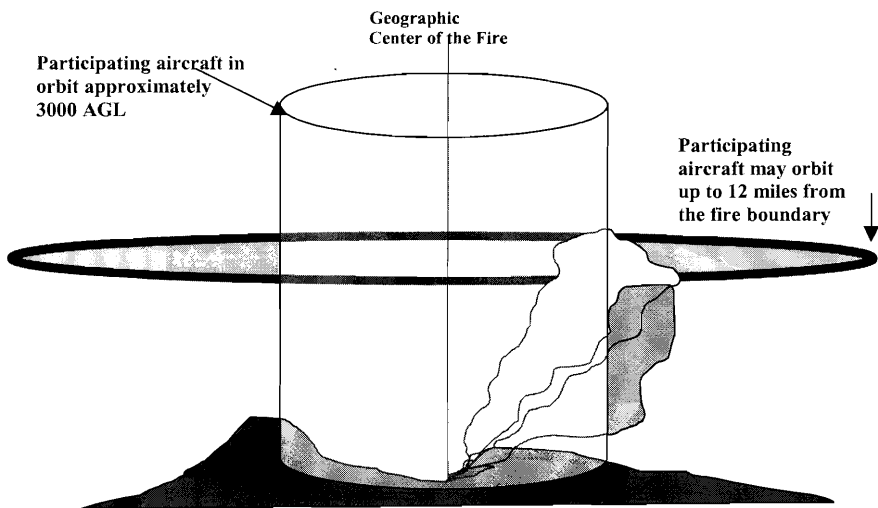

Pilots are advised to stay clear of Firefighting Traffic Areas. Remain 15 miles from the area of activity. If you must over-fly the area, do so at an altitude of 5000 feet AGL above. However, to remain safe and out of the way of working aircraft, it is best to circumnavigate the area.

The wild-land fire environment can be very complex and involve a large number and variety of aircraft types including fixed and rotary wing aircraft. Some of the aircraft are small single and multi-engine command and control platforms that can be especially difficult to see and may give the appearance that the fire is not staffed. The aircraft participating in firefighting can orbit as far out as 12 miles from the perimeter of the fire. Any intrusion by aircraft not directly involved in the firefighting operation could delay the delivery of much needed retardant or water to ground firefighters and will adversely affect the safety of participating aircraft. Please stay well away from wild-land fires even if you feel that aircraft are not working the fire; they may be en route or unseen.

If you see a fire developing along your route, report it immediately to air traffic control who will advise the US Forest Service. The firefighting community would welcome this information.

The following narratives summarize the FAR Part 93 Special Air Traffic Rules, and Airport Traffic Patterns in effect as prescribed in the rule. This information is advisory in nature and in no way relieves the pilot from compliance with the specific rules set forth in FAR Parts 91 and 93.

Special Airport Traffic Areas prescribed in Part 93 are depicted on Sectional Aeronautical Charts, World Aeronautical Charts, Enroute Low Altitude Charts, and where applicable, on VFR Terminal Area Charts.

OPERATIONS RESERVATIONS FOR HIGH DENSITY TRAFFIC AIRPORTS KENNEDY, LAGUARDIA, AND WASHINGTON REAGAN NATIONAL

The Federal Aviation Administration (FAA) has designated New York's Kennedy and LaGuardia Airports and Washington Reagan National Airport as High Density Traffic Airports (HDTA), Title 14, Code of Federal Regulations, part 93, subpart K, and has prescribed air traffic rules and requirements for operating aircraft (excluding helicopters) to and from those airports during certain hours.

Reservations are required for operations from 6 a.m. through 11:59 p.m. local time at LaGuardia Airport and Washington Reagan National Airport. Reservations at Kennedy Airport are required from 3 p.m. through 7:59 p.m. local time.

Reservation procedures are detailed in Advisory Circular 93-1, Reservations for Unscheduled Operations at High Density Traffic Airports. A copy of the advisory circular is available on the FAA website at <http://www.faa.gov>. Reservations for unscheduled operations are allocated through the Enhanced Computer Voice Reservation System (e-CVRS) accessible via telephone or the Internet. This system may not be used to make reservations for scheduled air carrier or commuter flights.

The toll-free telephone number for accessing e-CVRS is 1-800-875-9694 and is available for calls originating within the United States, Canada, and the Caribbean. Users outside the toll-free areas may access e-CVRS by calling the toll number of 703-707-0568. The Internet web address for accessing the e-CVRS is <http://www.fly.faa.gov/ecvrs>. If you have any questions about reservation requirements or are experiencing problems with the system, you may telephone the Airport Reservation Office at the Air Traffic Control System Command Center at (703) 904-4452.

Requests for instrument flight rules (IFR) reservations will be accepted beginning 72 hours prior to the proposed time of operation at the high-density airport. For example, a request for an 11 a.m. reservation on a Thursday will be accepted beginning at 11 a.m. on the previous Monday.

IFR reservations must be obtained prior to IFR landing or takeoff at an HDTA during slot controlled hours. An air traffic control (ATC) clearance does not constitute a reservation. A reservation does not constitute permission to operate at an HDTA if additional operational limits or procedures are required by NOTAM and/or regulation.

Aircraft involved in medical emergencies will be handled by ATC without regard to a reservation after obtaining prior approval of the ATC System Command Center on (703) 904-4452. ATC will accommodate declared other emergency situations without regard to slot reservations.

NOTE: Visual flight rule (VFR) reservations via ATC for unscheduled operations at LaGuardia are not authorized from 7 a.m. through 8:59 a.m. local time and 4 p.m. through 6:59 p.m. local time, Monday through Friday and Sunday evenings, unless otherwise announced by NOTAM. Both IFR and VFR operations during those time periods must obtain an advance reservation through e-CVRS.

FSS TELEPHONE NUMBERS

Flight Service Station (FSS) facilities provide flight planning and weather briefing services to pilots. FSS services in the contiguous United States, Hawaii and Puerto Rico, are provided by a network of large FSS facilities and a few select remote facilities some of which operate part-time. Because of the interconnectivity between the facilities, all FSS services including radio frequencies are available continuously using published data.

Telephone Information Briefing Service (TIBS) is a FSS service that provides continuous recordings of meteorological and/or aeronautical information. A touch-tone telephone is required to fully utilize this service.

Further information can be found in the Aeronautical Information Manual (AIM).

NATIONAL FSS TELEPHONE NUMBER

Pilot Weather Briefings 1-800-WX-BRIEF (1-800-992-7433)

OTHER FSS TELEPHONE NUMBERS (except in Alaska)

TIBS (see description above) 1-877-4TIBS-WX (1-877-484-2799)

Clearance Delivery Only 1-888-766-8267

Lifeguard Flights Only 1-877-LIF-GRD3 (1-877-543-4733)

Flights within DC SFRA & FRZ * 1-866-225-7410

* District of Columbia Special Flight Rules Area & Flight Restricted Zone

KEY to AERODROME FORECAST (TAF) and AVIATION ROUTINE WEATHER REPORT (METAR)

TAF KPIT 091730Z 091818 15005KT 5SM HZ.FEW020 WS010/31022KT
FM1930 30015G25KT 3SM SHRA OVC015 TEMPO 2022 1/2SM +TSRA
OVC008CB
FM0100 27008KT 5SM SHRA BKN020 OVC040 PROB40 0407 1SM -RA BR
FM1015 18005KT 6SM -SHRA OVC020 BECMG 1315 P6SM NSW SKC

METAR KPIT 091955Z COR 22015G25KT 3/4SM R28L/2600FT TSRA OVC010CB
18/16 A2992 RMK SLP045 T01820159

Forecast	Explanation	Report
TAF	Message type: <u>TAF</u> -routine or <u>TAF AMD</u> -amended forecast, <u>METAR</u> -hourly, <u>SPECI</u> -special or <u>TESTM</u> -non-commissioned ASOS report	METAR
KPIT	ICAO location indicator	KPIT
091730Z	Issuance time: ALL times in UTC " <u>Z</u> ", 2-digit date, 4-digit time	091955Z
091818	Valid period: 2-digit date, 2-digit beginning, 2-digit ending times In U.S. METAR : <u>COR</u> rected ob; or <u>AUTOM</u> ated ob for automated report with no human intervention; omitted when observer logs on	COR
15005KT	Wind: 3 digit true-north direction, nearest 10 degrees (or <u>VariaBle</u>); next 2-3 digits for speed and unit, <u>KT</u> (KMH or MPS); as needed, <u>Gust</u> and maximum speed; 00000KT for calm; for METAR , if direction varies 60 degrees or more, <u>Variability</u> appended, e.g. 180 <u>V</u> 260	22015G25KT
5SM	Prevailing visibility: in U.S., <u>Statute Miles</u> & fractions; above 6 miles in TAF <u>Plus6SM</u> . (Or, 4-digit minimum visibility in meters and as required, lowest value with direction)	3/4SM
HZ	Runway Visual Range: <u>R</u> ; 2-digit runway designator <u>Left</u> , <u>Center</u> , or <u>Right</u> as needed; <u>"I"</u> ; <u>Minus</u> or <u>Plus</u> in U.S., 4-digit value, <u>FeeT</u> in U.S., (usually meters elsewhere); 4-digit value <u>Variability</u> 4-digit value (and tendency <u>Down</u> , <u>Up</u> or <u>No</u> change)	R28L/2600FT
FEW020	Significant present, forecast and recent weather: see table (on back) Cloud amount, height and type: <u>SKY</u> <u>Clear</u> 0/8, <u>FEW</u> >0/8-2/8, <u>SCaT</u> tered 3/8-4/8, <u>BroKeN</u> 5/8-7/8, <u>OVeR</u> Cast 8/8; 3-digit height in hundreds of ft; <u>Towering CU</u> mulus or <u>CumulonimBus</u> in METAR ; in TAF , only <u>CB</u> . <u>Vertical</u> <u>Visibility</u> may be reported sky and height "VV004". More than 1 layer may be reported or forecast. In automated METAR reports only, <u>CLeaR</u> for "clear below 12,000 feet" Temperature: degrees Celsius; first 2 digits, temperature <u>"I"</u> last 2 digits, dew-point temperature; <u>Minus</u> for below zero, e.g., M06 Altimeter setting: indicator and 4 digits; in U.S., <u>A</u> -inches and hundredths; (<u>Q</u> -hectoPascals, e.g., Q1013)	TSRA OVC010CB 18/16 A2992

KEY to AERODROME FORECAST (TAF) and AVIATION ROUTINE WEATHER REPORT (METAR)

Forecast	Explanation	Report
WS010/31022KT	In U.S. TAF , non-convective low-level ($\leq 2,000$ ft) <u>Wind Shear</u> ; 3-digit height (hundreds of ft); <u>"/";</u> 3-digit wind direction and 2-3 digit wind speed above the indicated height, and unit, <u>KT</u>	RMK SLP045 T01820159
FM1930	In METAR , <u>ReMarK</u> indicator & remarks. For example: <u>Sea Level Pressure</u> in hectoPascals & tenths, as shown: 1004.5 hPa; <u>Temp/</u> dew-point in tenths °C, as shown: temp. 18.2°C, dew-point 15.9°C	
TEMPO 2022	<u>From</u> and 2-digit hour and 2-digit minute beginning time: indicates significant change. Each FM starts on new line, indented 5 spaces.	
PROB40 0407	<u>TEMPO</u> rary: changes expected for < 1 hour and in total, < half of 2-digit hour beginning and 2-digit hour ending time period	
BECMG 1315	<u>PROB</u> ability and 2-digit percent (30 or 40): probable condition during 2-digit hour beginning and 2-digit hour ending time period	
	<u>BEC</u> oming: change expected during 2-digit hour beginning and 2-digit hour ending time period	

Table of Significant Present, Forecast and Recent Weather - Grouped in categories and used in the order listed below; or as needed in TAF, No Significant Weather.

QUALIFIER

Intensity or Proximity

- Light "no sign" Moderate + Heavy

VC Vicinity: but not at aerodrome; in U.S. **METAR**, between 5 and 10SM of the point(s) of observation; in U.S. **TAF**, 5 to 10SM from center of runway complex (elsewhere within 8000m)

Descriptor

MI Shallow	BC Patches	PR Partial	TS Thunderstorm
BL Blowing	SH Showers	DR Drifting	FZ Freezing

WEATHER PHENOMENA

Precipitation

DZ Drizzle	RA Rain	SN Snow	SG Snow grains
IC Ice crystals	PL Ice pellets	GR Hail	GS Small hail/snow pellets
UP Unknown precipitation in automated observations			

Obscuration

BR Mist ($\geq 5/8$ SM)	FG Fog ($< 5/8$ SM)	FU Smoke	VA Volcanic ash
SA Sand	HZ Haze	PY Spray	DU Widespread dust

Other

SQ Squall	SS Sandstorm	DS Duststorm	PO Well developed dust/sand whirls
FC Funnel cloud	+FC tornado/waterspout		

- Explanations in parentheses "() " indicate different worldwide practices.
- Ceiling is not specified; defined as the lowest broken or overcast layer, or the vertical visibility.
- NWS **TAFs** exclude turbulence, icing & temperature forecasts; NWS **METARs** exclude trend fcsts
- Although not used in US, Ceiling And Visibility OK replaces visibility, weather and clouds if: visibility ≥ 10 km; no cloud below 5000 ft (1500 m) or below the highest minimum sector altitude, whichever is greater and no CB; and no precipitation, TS, DS, SS, MIFG, DRDU, DRSA or DRSN.

UNITED STATES DEPARTMENT OF COMMERCE

NOAA/PA 96052

National Oceanic and Atmospheric Administration—National Weather Service

KEY AIR TRAFFIC FACILITIES**Air Traffic Control System Command Center**

Main Number.....703-904-4400

RGNL AIR TRAFFIC DIVISIONS

REGION	TELEPHONE
Alaskan	907-271-5464
Central	816-329-2500
Eastern	718-553-4502
Great Lakes	847-294-7202
New England	781-238-7500
Northwest Mountain	425-227-2500
Southern	404-305-5500
Southwest	817-222-5500
Western Pacific	310-725-6500

AIR ROUTE TRAFFIC CONTROL CENTERS (ARTCCs)

ARTCC NAME	*24 HR RGNL DUTY OFFICE TELEPHONE #	BUSINESS HOURS	BUSINESS TELEPHONE #
Albuquerque	817-222-5006	7:30 a.m.-4:00 p.m.	505-856-4300
Anchorage	907-271-5936	7:30 a.m.-4:00 p.m.	907-269-1137
Atlanta	404-305-5180	7:30 a.m.-5:00 p.m.	770-210-7601
Boston	617-238-7001	7:30 a.m.-4:00 p.m.	603-879-6633
Chicago	847-294-8400	8:00 a.m.-4:00 p.m.	630-906-8221
Cleveland	847-294-8400	8:00 a.m.-4:00 p.m.	440-774-0310
Denver	425-227-1389	7:30 a.m.-4:00 p.m.	303-651-4100
Ft. Worth	817-222-5006	7:30 a.m.-4:00 p.m.	817-858-7300
Houston	817-222-5006	7:30 a.m.-4:00 p.m.	281-230-5300
Indianapolis	847-294-8400	8:00 a.m.-4:00 p.m.	317-247-2231
Jacksonville	404-305-5180	8:00 a.m.-4:30 p.m.	904-549-1501
Kansas City	816-329-3000	7:30 a.m.-4:00 p.m.	913-254-8500
Los Angeles	661-265-8200	7:30 a.m.-4:00 p.m.	661-265-8200
Memphis	404-305-5180	7:30 a.m.-4:00 p.m.	901-368-8103
Miami	404-305-5180	7:00 a.m.-3:30 p.m.	305-716-1500
Minneapolis	847-294-8400	8:00 a.m.-4:00 p.m.	651-463-5580
New York	718-995-5426	8:00 a.m.-4:40 p.m.	516-468-1001
Oakland	310-725-3300	6:30 a.m.-3:00 p.m.	510-745-3331
Salt Lake City	425-227-1389	7:30 a.m.-4:00 p.m.	801-320-2500
Seattle	425-227-1389	7:30 a.m.-4:00 p.m.	253-351-3500
Washington	718-995-5426	8:00 a.m.-4:30 p.m.	703-771-3401

MAJOR TERMINAL RADAR APPROACH CONTROLS (TRACONS)

TRACON NAME	*24 HR RGNL DUTY OFFICE TELEPHONE #	BUSINESS HOURS	BUSINESS TELEPHONE #
Atlanta	404-305-5180	7:00 a.m.-3:30 p.m.	404-669-1200
Chicago	847-294-8400	8:00 a.m.-4:00 p.m.	847-608-5509
Dallas/Ft. Worth	817-222-5006	7:30 a.m.-4:00 p.m.	972-615-2500
Denver	425-227-1389	7:30 a.m.-4:00 p.m.	303-342-1500
Houston	817-222-5006	7:30 a.m.-4:00 p.m.	281-230-8400
New York	718-995-5426	8:00 a.m.-4:30 p.m.	516-683-2901
Northern CA	310-725-3300	7:00 a.m.-3:30 p.m.	916-366-4001
Potomac	718-995-5426	8:00 a.m.-4:30 p.m.	540-349-7500
Southern CA	310-725-3300	7:30 a.m.-4:00 p.m.	858-537-5800

*Facilities can be contacted through the Rgnl Duty Officer during non-business hours.

KEY AIR TRAFFIC FACILITIES

DAILY NAS REPORTABLE AIRPORTS

AIRPORT NAME	*24 HR RGNL DUTY OFFICE TELEPHONE #	BUSINESS HOURS	BUSINESS TELEPHONE #
Albuquerque Intl Sunport, NM	817-222-5006	8:00 a.m.-5:00 p.m.	505-842-4366
Andrews AFB, MD	718-995-5426	8:00 a.m.-4:30 p.m.	301-735-2380
Baltimore/Washington Intl Thurgood Marshall, MD	718-995-5426	8:00 a.m.-4:30 p.m.	410-962-3555
Boston Logan Intl, MA	781-238-7001	7:30 a.m.-4:00 p.m.	617-455-3100
Bradley Intl, CT	617-238-7001	7:30 a.m.-4:00 p.m.	203-627-3428
Burbank/Bob Hope, CA	310-725-3300	7:00 a.m.-5:30 p.m.	818-567-4806
Charlotte Douglas Intl, NC	404-305-5180	8:00 a.m.-4:30 p.m.	704-344-6487
Chicago Midway, IL	847-294-8400	8:00 a.m.-4:00 p.m.	773-884-3670
Chicago O'Hare Intl, IL	847-294-8400	8:00 a.m.-4:00 p.m.	773-601-7600
Cleveland Hopkins Intl, OH	847-294-8400	8:00 a.m.-4:00 p.m.	216-898-2020
Covington/Cincinnati, OH	708-294-7401	8:00 a.m.-4:30 p.m.	606-767-1006
Dallas/Ft. Worth Intl, TX	817-222-5006	8:30 a.m.-5:00 p.m.	972-615-2531
Dayton Cox Intl, OH	847-294-8400	7:30 a.m.-4:00 p.m.	937-454-7300
Denver Intl, CO	425-227-1389	7:30 a.m.-4:00 p.m.	303-342-1600
Detroit Metro, MI	847-294-8400	8:00 a.m.-4:00 p.m.	734-955-5000
Fairbanks Intl, AK	907-271-5936	7:30 a.m.-4:00 p.m.	907-474-0050
Fort Lauderdale Intl, FL	404-305-5180	7:00 a.m.-3:30 p.m.	305-356-7932
George Bush Intercontinental/Houston, TX	817-222-5006	7:30 a.m.-4:00 p.m.	713-230-8400
Hartsfield-Jackson Atlanta Intl, GA	404-305-5180	7:00 a.m.-3:30 p.m.	404-669-1200
Honolulu Intl, HI	310-725-3300	7:30 a.m.-4:00 p.m.	808-840-6100
Houston Hobby, TX	817-222-5006	8:00 a.m.-5:00 p.m.	713-847-1400
Indianapolis Intl, IN	847-294-8400	8:00 a.m.-4:00 p.m.	317-484-6600
Kahului/Maui, HI	310-725-3300	7:30 a.m.-4:00 p.m.	808-877-0725
Kansas City Intl, MO	816-329-3000	7:30 a.m.-4:00 p.m.	816-329-2700
Las Vegas McCarran, NV	310-725-3300	7:30 a.m.-4:00 p.m.	702-262-5978
Los Angeles Intl, CA	310-725-3300	7:00 a.m.-3:30 p.m.	310-342-4900
Louis Armstrong New Orleans Intl, LA	817-222-5006	7:00 a.m.-4:30 p.m.	504-471-4300
Memphis Intl, TN	404-305-5180	7:30 a.m.-4:00 p.m.	901-322-3350
Miami Intl, FL	404-305-5180	7:00 a.m.-4:00 p.m.	305-869-5400
Minneapolis/St. Paul, MN	847-294-8400	8:00 a.m.-4:00p.m.	612-713-4000
Nashville Intl, TN	404-305-5180	7:00 a.m.-3:30 p.m.	615-781-5460
New York Kennedy Intl, NY	718-995-5426	8:00 a.m.-4:30 p.m.	718-656-0335
New York La Guardia, NY	718-995-5426	8:00 a.m.-4:30 p.m.	718-335-5461
Newark Liberty Intl, NJ	718-995-5426	7:30 a.m.-4:00 p.m.	973-565-5000
Norman Y. Mineta San Jose Intl, CA	310-725-3300	7:30 a.m.-4:00 p.m.	408-982-0750
Ontario Intl, CA	310-725-3300	7:30 a.m.-4:00 p.m.	909-983-7518
Orlando Intl, FL	404-305-5180	7:30 a.m.-5:00 p.m.	407-850-7000
Philadelphia Intl, PA	718-995-5426	8:00 a.m.-4:30 p.m.	215-492-4100
Phoenix Sky Harbor Intl, AZ	310-725-3300	7:30 a.m.-4:00 p.m.	602-379-4226
Pittsburgh Intl, PA	718-995-5426	8:00 a.m.-4:30 p.m.	412-269-9237
Portland Intl, OR	425-227-1389	7:30 a.m.-4:00 p.m.	503-493-7500
Raleigh-Durham, NC	404-305-5180	8:00 a.m.-4:30 p.m.	919-840-5544
Ronald Reagan Washington National, DC	718-995-5426	8:00 a.m.-4:30 p.m.	703-413-1535
Salt Lake City, UT	425-227-1389	7:30 a.m.-4:00 p.m.	801-325-9600
San Antonio Intl, TX	817-222-5006	8:00 a.m.-4:30 p.m.	210-805-5507
San Diego Lindbergh Intl, CA	310-725-3300	8:00 a.m.-4:30 p.m.	619-299-0677
San Francisco Intl, CA	310-725-3300	7:00 a.m.-3:30 p.m.	650-876-2883
San Juan Intl, PR	404-305-5180	7:30 a.m.-5:00 p.m.	809-253-8663
Seattle-Tacoma Intl, WA	425-227-1389	7:30 a.m.-4:00 p.m.	206-768-2900
St. Louis Lambert, MO	816-329-3000	7:30 a.m.-4:00 p.m.	314-890-1000
Tampa Intl, FL	404-305-5180	7:30 a.m.-4:00 p.m.	813-371-7700
Ted Stevens Anchorage Intl, AK	907-271-5936	7:30 a.m.-4:00 p.m.	907-271-2700
Teterboro, NJ	718-995-5426	8:00 a.m.-4:30 p.m.	201-288-1889
Washington Dulles Intl, DC	718-995-5426	8:00 a.m.-4:30 p.m.	571-323-6372
West Palm Beach, FL	404-305-5180	8:00 a.m.-4:30 p.m.	561-683-1867
Westchester Co, NY	718-995-5426	8:00 a.m.-4:30 p.m.	914-948-6520

*Facilities can be contacted through the Rgnl Duty Officer during non-business hours.

Air Route Traffic Control Center frequencies and their remoted transmitter sites are listed below for the coverage of this volume. Bold face type indicates high altitude frequencies, light face type indicates low altitude frequencies. To insure unrestricted IFR operations within the high altitude enroute sectors, the use of 720 channel communications equipment (25 kHz channel spacing) is required.

®CHICAGO CENTER
H-2-5-10, L-12-27-28-31, A-1
(KZAU)

Burlington – 135.6
 Cedar Rapids – 132.8
 Des Moines – 127.05
 Dubuque – 133.95 **127.775 125.225**
 Moline – **135.825** 118.75
 Ottumwa – 118.15
 Washington – **134.325 133.35 125.575**

®DENVER CENTER – 124.8
H-1-2-3-4-5-6, L-8-9-10-11-12-13-14-15
(KZDV)

Ainsworth – 132.7 127.95
 Cheyenne – 125.9
 Colby – **132.175 127.65**
 Crawford – **135.025** 127.95
 Goodland – 132.5
 Grand Island West – 132.7
 Hayes Center – **127.025**
 Hill City – 132.5
 North Platte – 132.7 **124.225**
 Ogallala – 132.7 **126.325**
 O'Neill – **135.025** 132.7
 Rapid City – 127.95
 Scottsbluff – 127.95
 Sterling – 118.475

®KANSAS CITY CENTER – 132.325
H-5-6, L-10-15-16-27, A-2
(KZKC)

Anthony – **133.2** 118.35
 Butler – 125.55
 Chanute – 132.9
 Chillicothe – 125.25
 Columbia – **134.5** 134.5 **119.475** 118.4
 Dodge City – **120.725**
 Edna – 128.6 **118.125**
 Emporia – **132.25** 127.725 **124.975** 120.2
 Farmington – **132.65 120.825** 127.475
 Garden City – **133.45** 125.2
 Hallsville – **126.975**
 Hutchinson – **134.3 132.825** 118.8
 Independence – **121.65**
 Kansas City – **127.125**
 Kirksville – **134.625 133.725** 132.6
 Liberal – **134.675** 134.0
 Manhattan – 127.35
 Maples – 128.35
 Richland – 128.35 **125.675** 124.1
 Russell – 124.4
 St. Charles – 125.9
 St. Joseph – 127.9
 St. Louis – **133.15** 128.35
 Salina – 134.9 **125.175**
 Springfield – **133.475** 127.5
 Topeka – **134.725 125.425** 123.8

®MEMPHIS CENTER
H-5-6-9, L-15-16-17-18-22-25-26
(KZME)

Malden – 134.65

® MINNEAPOLIS CENTER – 134.45 125.5 120.3

H-2-5-10-11, L-10-12-13-14-27-28-31

(KZMP)

Aberdeen – 120.6

Alexandria – **133.4** 126.1

Alpena – 125.475

Bemidji – 134.75

Bismark – 125.6 **125.6**

Brainerd – 118.05

Darwin – 125.5

Des Moines – **135.775 118.825** 125.65

Dickinson – 124.25

Duluth – **134.55** 134.55 127.9

Dupree – 126.8

Fairmont – 127.75

 Fargo – **127.35**

Farmington – 133.7

Ft. Dodge – 134.0

Grand Forks – **132.15**

Grand Island – 126.05

Green Bay – 125.55

Hastings – **135.1** 119.4Huron – **126.25**

International Falls – 120.9

Iron Mountain – 133.45 121.25

Jamestown – 126.8 **124.2**La Crosse – 128.6 **118.85**Lincoln – **119.525**

Mankato – 135.0

Marysville – **134.225** 126.4Mason City – **134.25** 127.3Minot – **127.6** 127.6 118.9

Mosinee – 124.4

Omaha – **132.725** 128.75 119.6O'Neill – 128.0 **124.875**

Oscoda – 125.475

Pierre – **128.425** 125.1

Princeton – 121.05

Redwood Falls – **133.075** 127.1 **119.875**

Rochester – 132.35

Roseau – 134.75

Sioux City – **119.725** 124.1

Sioux Falls – 132.05

Traverse City – 338.3

Watertown – 128.5

White Cloud – **132.55** 120.85

® SALT LAKE CITY CENTER

H-1-2-3, L-9-11-12-13-14

(KZLC)

Watford City – **126.85** 126.85

VHF frequencies available at Flight Service Stations and at their remote communication outlets (RCO's) are listed below for the coverage of this volume. Frequencies in bold type are available all altitudes but recommended for use FL180 and above. "T" indicates transmit only and "R" indicates receive only. RCO's available at NAVAID's are listed after the NAVAID name. RCO's not at NAVAID's are listed by name.

COLUMBIA AFSS

BUTLER VORTAC 115.9T 122.1R
 CHILLICOTHE RCO 122.25
 CLINTON RCO 122.4
 COLUMBIA RCO 119.3 122.2 122.65
 DOGWOOD VORTAC 109.4T 122.1R
 DOWNTOWN RCO **122.6**
 HALLSVILLE VORTAC 114.2T 122.1R
 JEFFERSON CITY RCO 122.25
 JOHNSON COUNTY RCO 122.15
 JOPLIN RCO 122.6
 KANSAS CITY VORTAC 113.25T 122.1R 122.65
 KIRKSVILLE VORTAC 114.6T 122.1R 122.2
 LEBANON RCO 122.5
 MACON VOR/DME 112.9T 122.1R
 MAPLES VORTAC 113.4T 122.1R
 NEOSHO VOR/DME 117.3 122.1R
 POINT LOOKOUT RCO 122.65
 ST JOSEPH VORTAC 115.5T 122.1R 122.3
 SEDALIA RCO 122.05
 SPRINGFIELD VORTAC 116.9T 122.1R **122.55**
 SUNSHINE RCO 122.15
 VICHY VOR/DME 117.7T 122.1R 122.35
 WEST PLAINS RCO 122.15

COLUMBUS AFSS

AINSWORTH RCO 122.4
 ALLIANCE RCO 122.3
 BEATRICE RCO 122.5
 CENTRAL NEBRASKA RCO 122.45
 CHADRON VOR/DME 113.4T 122.1R 122.5
 COLUMBUS RCO 122.2 122.4
 HASTINGS VOR/DME 108.8T 122.1R
 HAYES CENTER VORTAC 117.7T 122.1R
 KEARNEY RCO 122.55
 LEE BIRD RCO **122.5**
 LINCOLN RCO **122.65**
 MC COOK RCO **122.6**
 NORFOLK VOR/DME 109.6T 122.15
 OMAHA RCO **122.35**
 O'NEILL RCO 122.45
 PAWNEE CITY VORTAC 112.4T 122.1R
 SCOTTSBLUFF VORTAC 112.6T 122.1R **122.6**
 SIDNEY VORTAC 115.9T 122.1R **122.45**
 THEDFORD RCO 122.4
 WOLBACH VORTAC 114.8T 122.1R

FORT DODGE AFSS

BURLINGTON RCO 122.65
CEDAR RAPIDS RCO 122.55
CHARLES CITY RCO 122.4
DAVENPORT RCO 122.5
DENISON RCO 122.25
DES MOINES RCO 122.65
DUBUQUE RCO 122.05
FORT DODGE RCO 122.2 122.3
GRINNELL RCO **122.35**
IOWA CITY VORTAC 116.2T 122.1R 122.25
LAMONI VORTAC 116.7T 122.1R
MASON CITY RCO 122.6
NEWTON VOR/DME 112.5T 122.1R
OMAHA VORTAC 116.3T 122.1R
OTTUMWA RCO 122.4
SIOUX CITY VORTAC 116.5T 122.1R 122.45
SPENCER RCO 122.15
WATERLOO RCO 122.05
WAUKON VORTAC 116.6T 122.1R

GRAND FORKS AFSS

BISMARCK RCO 122.2
BOWMAN RCO 122.4
DEVILS LAKE RCO 122.3
DICKINSON RCO 122.2
FARGO RCO 122.425
GRAND FORKS RCO 122.2 **122.6**
GRAND FORKS VOR/DME 114.3T
HAZEN RCO 122.45
JAMESTOWN VOR/DME 114.5T 122.2 123.6
MINOT RCO 122.2
ROLLA RCO 122.65
WILLISTON RCO **123.6**

GREEN BAY AFSS 122.2 122.55

RED WING RCO 122.6

HURON AFSS

ABERDEEN VOR/DME 113.0T 122.1R 122.4
BROOKINGS RCO 122.65
BUFFALO RCO 122.15
DUPREE RCO 122.6
HURON VORTAC 117.6T 122.1R 122.2 122.6 123.6
MITCHELL RCO 122.3
MOBRIDGE RCO 122.35
PHILIP RCO 122.4
PIERRE RCO 122.2
RAPID CITY VORTAC 112.3T 122.1R 122.65
SIOUX FALLS RCO 122.2
SPEARFISH RCO 122.55
WATERTOWN RCO 122.5
WINNER VOR 112.8T 122.1R
YANKTON RCO 122.55

PRINCETON AFSS

ALBERT LEA RCO 122.05
 ALEXANDRIA RCO 122.6
 ANOKA COUNTY RCO 122.55
 AUSTIN RCO 122.5
 BAUDETTE RCO 122.4
 BEMIDJI RCO 123.6
 BRAINERD RCO 123.65
 CRANE LAKE RCO 122.2
 DARWIN VORTAC 109.0T 122.1R
 DETROIT LAKES RCO 122.5
 DULUTH RCO 122.35
 ELY VOR/DME 109.6T 122.1R
 EVELETH RCO 122.45
 FAIRMONT VOR/DME 110.2T 123.6R
 FARMINGTON VORTAC 115.7T 122.1R
 FERGUS FALLS RCO 122.35
 GRAND MARAIS RCO 122.3
 GRAND RAPIDS RCO 122.05
 HIBBING RCO 122.6
 HUMBOLDT VORTAC 112.4T 122.1R
 INTL FALLS RCO 123.6
 MADISON RCO 122.3
 MANKATO VOR/DME 110.8T 122.1R
 MARSHALL RCO 122.35
 MINNEAPOLIS RCO 122.3
 MONTEVIDEO RCO 122.45
 MORA RCO 122.4
 MORRIS RCO 122.25
 NODINE VORTAC 117.9T 122.1R
 OWATONNA RCO 122.25
 PARK RAPIDS VOR/DME 110.6T 122.1R
 PRINCETON RCO 122.2
 REDWOOD FALLS RCO 122.4
 THIEF RIVER FALLS VOR/DME 108.4T 122.1R 123.6R
 ROCHESTER RCO 122.45
 ROSEAU RCO 122.25
 ST CLOUD RCO 122.5
 WARROAD RCO 122.55
 WILLMAR RCO 122.15
 WINONA RCO 122.15
 WORTHINGTON VOR/DME 110.6T 122.1R 123.6R

SAINT LOUIS AFSS

BIBLE GROVE VORTAC 109.0T 122.05R
 CAPE GIRARDEAU VOR/DME 112.9T 122.1R **122.4**
 CAPITAL VORTAC 112.7T 122.1R 122.25
 CENTRALIA VORTAC 115.0T 122.1R
 CHAMPAIGN (URBANA) RCO 122.45
 DECATUR RCO 122.3
 FARMINGTON VORTAC 115.7T 122.1R 122.3
 FORISTELL VORTAC 110.8T 122.1R
 MALDEN VORTAC 111.2T 122.1R
 MARION VOR/DME 110.4T 122.1R
 MATTOON VOR/DME 109.4T 123.6R
 QUINCY VORTAC 113.6T 122.1R 122.5
 ST LOUIS VORTAC 117.4T 122.1R 122.2 122.6 122.45
 ST LOUIS RGNL RCO 122.45 122.6
 SAMSVILLE VOR/DME 116.6T 122.1R
 SPINNER RCO 122.25
 SPIRIT of ST LOUIS RCO 122.2 124.75
 VANDALIA VORTAC 114.3T 122.1R

WICHITA AFSS

ANTHONY VORTAC 112.9T 122.1R
CHANUTE RCO 122.35
DODGE CITY RCO 122.35
EMPORIA RCO 122.3
FT LEAVENWORTH RCO 122.35
GARDEN CITY RCO 122.45
GOODLAND RCO 122.4
GREAT BEND RCO 122.5
HAYS RCO 122.3
HILL CITY RCO **122.65**
HUTCHINSON RCO 122.05
LIBERAL RCO 122.4
MANHATTAN RCO **122.65**
MANKATO VORTAC 109.8T 122.1R
MC PHERSON RCO 122.15
OSWEGO VORTAC 117.6T 122.1R
PARSONS RCO 122.35
RUSSELL RCO 122.6
SALINA RCO 122.4
STROTHER RCO 122.5
TOPEKA RCO 122.45
ULYSSES RCO 122.3
WICHITA RCO 122.2 **122.65**

FLIGHT STANDARDS DISTRICT OFFICES (FSDO)

Below is a list of FSDO's in the area of coverage of this directory. These offices serve the aviation industry and the general public on matters relating to certification and operation of general aviation aircraft. Address letters to Manager, Flight Standards District Office—Federal Aviation Administration.

IOWA

Des Moines FSDO
3753 Convenience Blvd
Ankeny, IA 50021
Telephone: 515-289-3840

KANSAS

Wichita FSDO
1801 Airport Road
Wichita, KS 67209
Telephone: 316-941-1200

MINNESOTA

Minneapolis FSDO
6020 28TH Ave. South, Room 201
Minneapolis, MN 55450
Telephone: 612-713-4211

MISSOURI

Kansas City FSDO
901 Locust, Room 403
Kansas City, MO 64106
Telephone: 816-329-4000

St. Louis FSDO
10801 Pear Tree Lane
St. Ann, MO 63074
Telephone: 314-429-1006

NEBRASKA

Lincoln FSDO
3431 Aviation Rd, Suite 120
Lincoln, NE 68524
Telephone: 402-475-1738

NORTH DAKOTA

Fargo FSDO
4620 Amber Valley Pkwy
Fargo, ND 58104
Telephone: 701 277-1245

SOUTH DAKOTA

Rapid City FSDO
909 St. Joseph Street
Suite 700
Rapid City, SD 57701
Telephone: 605-737-3050

PREFERRED IFR ROUTES

A system of preferred routes has been established to guide pilots in planning their route of flight, to minimize route changes during the operational phase of flight, and to aid in the efficient orderly management of the air traffic using federal airways. The preferred IFR routes which follow are designed to serve the needs of airspace users and to provide for a systematic flow of air traffic in the major terminal and en route flight environments. Cooperation by all pilots in filing preferred routes will result in fewer traffic delays and will better provide for efficient departure, en route and arrival air traffic service.

The following lists contain preferred IFR routes for the low altitude stratum and the high altitude stratum. The high altitude list is in two sections; the first section showing terminal to terminal routes and the second section showing single direction route segments. Also, on some high altitude routes low altitude airways are included as transition routes.

The following will explain the terms/abbreviations used in the listing:

1. Preferred routes beginning/ending with an airway number indicate that the airway essentially overlies the airport and flights are normally cleared directly on the airway.
2. Preferred IFR routes beginning/ending with a fix indicate that aircraft may be routed to/from these fixes via a Standard Instrument Departure (SID) route, radar vectors (RV), or a Standard Terminal Arrival Route (STAR).
3. Preferred IFR routes for major terminals selected are listed alphabetically under the name of the departure airport. Where several airports are in proximity they are listed under the principal airport and categorized as a metropolitan area; e.g., New York Metro Area.
4. Preferred IFR routes used in one direction only for selected segments, irrespective of point of departure or destination, are listed numerically showing the segment fixes and the direction and times effective.
5. Where more than one route is listed the routes have equal priority for use.
6. Official location identifiers are used in the route description for VOR/VORTAC nav aids.
7. Intersection names are spelled out.
8. Navaid radial and distance fixes (e.g., ARD201113) have been used in the route description in an expediency and intersection names will be assigned as soon as routine processing can be accomplished. Navaid radial (no distance stated) may be used to describe a route to intercept a specified airway (e.g., MIV MIV101 V39); another navaid radial (e.g., UIM UIM255 GSW081); or an intersection (e.g., GSW081 FITCH).
9. Where two nav aids, an intersection and a navaid, a navaid and a navaid radial and distance point, or any navigable combination of these route descriptions follow in succession, the route is direct.
10. The effective times for the routes are in UTC. During periods of daylight saving time effective times will be one hour earlier than indicated. All states observe daylight saving time except Arizona, Puerto Rico and the Virgin Islands. Pilots planning flight between the terminals or route segments listed should file for the appropriate preferred IFR route.
11. (90–170 incl) altitude flight level assignment in hundred of feet.
12. The notations “pressurized” and “unpressurized” for certain low altitude preferred routes to Kennedy Airport indicate the preferred route based on aircraft performance.
13. High Altitude Preferred IFR Routes are in effect during the following time periods unless otherwise noted.
Sun 1300–2259 local time.
Mon thru Fri 0701–2259 local time.
Sat 0701–1459 local time.
14. Use current SIDs and STARs for flight planning.
15. For high altitude routes, the portion of the routes contained in brackets [] is suggested but optional. The portion of the route outside the brackets will likely be required by the facilities involved.

LOW ALTITUDE

Terminals	Route	Effective Times (UTC)
DES MOINES (DSM)		
Memphis (MEM).....	V175 MAW	0000–2359
KANSAS CITY METRO AREA		
Chicago Midway (MDW)	PIA MOTIF–STAR	0000–2359
Chicago O’Hare (ORD).....	EXCEL V116 PIA V262 BDF V10 PLANO	
Indianapolis (IND)	EXCEL V116 UIN V50	0000–2359
Louisville (SDF)	ANX V12 COU V44 HODGS V175 VIH V178 FAM V190 PXV V4	0000–2359
	or	
	ANX V159 AUGIE V234 VIH V178 FAM V190 PXV V4	0000–2359
St. Louis (STL).....	LAKES–DP COU TRAKE TRAKE–STAR.....	0000–2359
Terre Haute (HUF).....	EXCEL V116 UIN V50	0000–2359
MINNEAPOLIS METRO AREA		
Chicago Midway (MDW)	V2 LNR V171 RFD V128 V8 JOT	0000–2359
Chicago O’Hare (ORD).....	V2 V97 KRENA	0000–2359
ST. LOUIS METRO AREA		
Chicago Midway (MDW)	CARDS–DP SPI V9 PNT V69 JOT	0000–2359

370	PREFERRED IFR ROUTES	
Terminals	Route	Effective Times (UTC)
Chicago O'Hare (ORD).....	(at or blo 170) CARDS-DP SPI V9 PNT V227 PLANO	0000-2359
Cleveland (CLE).....	(non-turbojets) TURBO-DP DEC VHP V14 MIE V210 ROD ZABER-STAR	
Columbus (CMH)	TOY V12 J134 GBEES CVG V5 JOGER	
Indianapolis (IND)	(Turbojets) GATWY-DP VHP	
	or (Non-turbojets) TURBO-DP DEC VHP	
Kansas City (MCI).....	OZARK-DP MCM BQS-STAR	
WICHITA (ICT)		
Indianapolis (IND)	V12 EMP V234 ENL V72 BIB V12 KELLY	0000-2359
Louisville (IIU).....	V350 CNU V132 SGF V190 PXV V4	0000-2359
Terre Haute (HUF).....	V12 EMP V234 ENL V72 BIB	0000-2359
HIGH ALTITUDE		
Terminals	Route	Effective Times (UTC)
KANSAS CITY (MCI)		
Baltimore (BWI).....	LAKES-DP COU STL J24 VHP ROD J152 J162 MGW EMI-STAR	0000-2359
Chicago O'Hare (ORD).....	ROYAL-DP JTHRO IRK BENKY (RNAV)-STAR	
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	OBK CRL HIMEZ-STAR	
Dallas/Fort Worth (DFW)	RACER TUL UKW	
Detroit Metro-Wayne (DTW).....	MKG POLAR-STAR.....	
Kennedy (JFK).....	LAKES-DP COU STL J24 VHP ROD J29 JHW J70 LVZ LENDY-STAR	
La Guardia (LGA)	ROYAL-DP JTHRO IRK BDF JOT J146 ETG MIP-STAR	1100-0400
Milwaukee (MKE)	ROYAL-DP JTHRO IRK BDF JOT VEENA-STAR	
Newark (EWR).....	ROYAL-DP JTHRO IRK BDF JOT J146 GIJ J554 CRL J584 SLT FQM-STAR	
Washington Dulles (IAD).....	LAKES-DP COU STL J24 VHP J80 J30 BUCKO JASEN-STAR	
	or LAKES-DP COU STL J24 VHP J80 AIR MGW MGW 121 VERNI ESL ROYIL-STAR.....	
	or (GPS or DME/DME IRU equipped) or LAKES-DP COU STL J24 VHP J80 AIR MGW VERNI ESL SHNON (RNAV)-STAR	
Washington Natl (DCA).....	LAKES-DP COU STL J24 VHP J80 J30 BUCKO BUCKO-STAR	
	or LAKES-DP COU STL J24 VHP J80 J30 SHAAR WZRRD-STAR	
	or LAKES-DP COU STL J24 VHP J80 J30 SHAAR ELDEE (RNAV)-STAR.....	
LINCOLN (LNK)		
Chicago O'Hare (ORD).....	FOD DBQ JVL-STAR	0700-2359
MINNEAPOLIS (MSP)		
Atlanta (ATL).....	ZMBRO-DP ODI J30 BRIBE BDF ENL ENL162 PLESS TINGS J45 BNA RMG-STAR	1100-0400
	or	

Terminals	Route	Effective Times (UTC)
	(RNAV only) ZMBRO-DP ODI J30 BRIBE ENL ENL162 PLESS TINGS J45 BNA ERLIN (RNAV)-STAR	1100-0400
Baltimore (BWI)	DLL J34 AIR J162 MGW EMI-STAR	
Chicago Midway (MDW)	DBQ CVA MOTIF-STAR	1100-0400
Chicago O'Hare (ORD)	RST JVL-STAR	0000-2359
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	COULT-DP DLL J34 GRR HIMEZ-STAR	
Dallas/Fort Worth (DFW)	J21 IRW UKW	
Denver (DEN)	FSD J114 SNY LANDR-STAR	
Detroit Metro Area (PTK), (YIP), (ARB) (DET), (CYQG)	DLL BAE MKG LAN SPRTN-STAR	
Fort Lauderdale (FLL)	ROCHESTER-DP ALO J233 J45 STL J45 BNA J73 SZW J43 PIE FORTL-STAR	
	or (DME/DME-IRU or GPS) MSP ROCHESTER-DP ALO J233 J45 STL J45 BNA J73 SZW JINGL (RNAV)-STAR	
Fort Myers (RSW)	(DME/DME-IRU or GPS) ODI J30 BRIBE BDF ENL ENL162 PLESS J45 BNA J73 SZW TYNEE (RNAV)-STAR	1100-0300
Kansas City (MKC)	FOD RBA-STAR	
Kennedy (JFK)	DLL BAE J70 JHW J70 LVZ LENDY-STAR	0000-2359
La Guardia (LGA)	DLL BAE J34 J146 ETG MIP-STAR	
Madison (MSN)	ODI MSN	0700-2359
Marco Island (MKY)	(DME/DME-IRU or GPS) ODI J30 BRIBE BDF ENL ENL162 PLESS J45 BNA J73 SZW PIKKR (RNAV)-STAR	
Memphis (MEM)	ALO J233 STL J35 FAM ARG GQE-STAR	
	or ALO IRK VIH ARG GQE-STAR	
Miami (MIA)	ROCHESTER-DP ALO J233 J45 STL J45 BNA J73 SZW J43 PIE CYY-STAR	
	or (/E, /G, /R, /J, /L, /Q) MSP ROCHESTER-DP ALO J233 J45 STL J45 BNA J73 SZW J43 PIE DEEDS (RNAV)-STAR	
Milwaukee (MKE)	ODI MSN V2 WAITS	0700-2359
Myrtle Beach (MYR)	EARND ELANR EMMLY ERECO IIU RYANS	
Naples (APF)	(GPS required) ODI J30 BRIBE BDF ENL ENL162 PLESS J45 BNA J73 SZW PIKKR (RNAV)-STAR .	
Nashville (BNA)	ODI J30 BRIBE BDF ENL ENL162 PLESS J45	1100-0400
Newark (EWR)	DLL BAE J34 CRL J584 SLT FQM-STAR	
Oakland (OAK)	ABR J32 MLD J158 MVA ECA	
Orlando (ORL) (MCO)	ODI J30 BRIBE BDF ENL ENL162 PLESS J45 ATL J89 OTK LEESE-STAR	1100-0400
	or (GPS or DME/DME-IRU equipped) ODI J30 BRIBE BDF ENL ENL162 PLESS J45 ATL J89 OTK PIGLT (RNAV)-STAR	1100-0400
Palm Beach (PBI)	(GPS or DME/DME-IRU equipped) ROCHESTER-DP ALO J233 J45 STL J45 BNA J73 SZW WLACE	
Philadelphia (PHL)	COULT-DP DLL BAE J34 CRL CXR EWC JST BUNTS-STAR	
Phoenix (PHX)	ONL LBF PUB ALS J102 ZUN FOSSL-STAR	
Pottstown (PTW)	COULT-DP DLL BAE J34 CRL CXR EWC JST	
St. Louis (STL)	RST ALO J233 CNOTA RIVRS-STAR	
Salt Lake City (SLC)	ABR J158 DDY J202 OCS OGD	
San Francisco (SFO)	ABR J32 FMG ILA PYE	
Sarasota/Bradenton (SRQ)	ODI J30 BRIBE BDF ENL ENL162 PLESS J45 BNA J73 SZW CLAMP-STAR	1100-0400
Tampa (TPA)	ODI J30 BRIBE BDF ENL ENL162 PLESS J45 BNA J73 SZW DARBS-STAR	1100-0400

Terminals	Route	Effective Times (UTC)
Washington Natl (DCA).....	DLL J34 SHAAR WZRRD-STAR	
	or	
	DLL J34 SHAAR ELDEE (RNAV)-STAR	
Washington Dulles (IAD).....	DLL J34 AIR MGW MGW121 VERNI ESL	
	ROYIL-STAR	
	or	
	(GPS or DME/DME-IRU equipped) DLL J34 AIR	
	MGW VERNI SHNON (RNAV)-STAR.....	
West Palm Beach (PBI)	(GPS or DME/DME-IRU equipped)	
	ROCHESTER-DP ALO J233 J45 STL J45 BNA	
	J73 SZW CTY GULLO (RNAV)-STAR.....	
	or	
	ROCHESTER-DP ALO J233 J45 STL J45 BNA J73	
	SWZ CTY LLAKE-STAR	1100-0400
OMAHA (OMA)		
Chicago O'Hare (ORD).....	FOD DBQ JVL-STAR	0700-2359
ROCHESTER (RST)		
Chicago O'Hare (ORD).....	RST JVL-STAR	0000-2359
ST LOUIS (STL)		
Baltimore (BWI).....	GATWY-DP IIU J526 BKW J147 CSN	
	OTT-STAR	
Boca Raton (BCT).....	(DME/DME/IRU OR GPS) PLESS-DP BNA J73	
	SZW PRRIE (RNAV)-STAR	
Boston (BOS).....	GATWY-DP ROD J29 JHW J82 ALB GDM	
	GDM-STAR	
Chicago Midway (MDW).....	CARDS-DP SPI MOTIF-STAR	1200-0400
Chicago O'Hare (ORD).....	CARDS-DP BDF BDF-STAR,..	0000-2359
Cleveland Metro Area (CLE) (CGF) (BKL)		
(LNN) (LPR)	GATWY-DP JIGSY J134 JUDDI CVG ZABER-STAR..	
	or	
	(turbojets) GATWY-DP JIGSY J134 JUDDI CVG	
	ZABER-STAR	
Columbus (CMH)	GATWY-DP ROD V210 GUNNE	
Dallas/Fort Worth (DFW)	LINDY-DP MAP RZC FSM BYP	
Detroit Metro Area (PTK), (YIP), (ARB)		
(DET), (CYQG)	GATWY-DP VHP FWA CRUX-STAR	
	GATWY-DP VHP FWA V96 VVW VVW051 POOFE....	
Fort Lauderdale (FLL)	(all others) PLESS-DP BNA J73 SZW J43 PIE	
	FORTL-STAR.....	
	or	
	(DME/DME/IRU OR GPS) PLESS-DP BNA J73	
	SZW JINGL (RNAV)-STAR.....	
Fort Myers (FMY)	(DME/DME/IRU OR GPS TURBOJET)	
	LINDBERGH-DP MAW VUZ J39 MGM J41 SZW	
	TYNEE (RNAV)-STAR.....	
Houston George Bush Intcntl (IAH)	(Turbojets-GPS or DME/DME-IRU equipped)	
	LINDY-DP LIT J180 SWB TXMEX (RNAV)-STAR ..	
	or	
	(non-advanced NAV only) LINDY-DP LIT J180	
	SWB DAS-STAR	
Houston Hobby (HOU)	(GPS or DME/DME-IRU equipped) LINDY-DP LIT	
	J180 SWB ROKIT (RNAV)-STAR	
	or	
	(non-advanced NAV only) LINDY-DP LIT J180	
	SWB DAS-STAR	
La Guardia (LGA)	GATWY-DP ROD J29 J146 ETG MIP-STAR	
Miami (MIA)	(all others) PLESS-DP BNA J73 SZW J43 PIE	
	CYY-STAR	
	or	
	(DME/DME/IRU OR GPS TURBOJET) PLESS-DP	
	BNA J73 SZW SSCOT (RNAV)-STAR	
Orlando Executive (ORL).....	PLESS-DP BNA J73 SZW OTK LEESE-STAR	
	or	
	(GPS or DME/DME-IRU equipped) PLESS BNA	
	J73 SZW OTK PIGLT (RNAV)-STAR	1100-0400

Terminals	Route	Effective Times (UTC)
Orlando Intl (MCO)	(GPS or DME/DME-IRU equipped) PLESS BNA J73 SZW OTK PIGLT (RNAV)-STAR	1000-0400
Tampa (TPA)	LINDY-DP MAW VUZ J41 SZW DARBS-STAR	1100-0400
Washington Dulles (IAD)	BLUES-DP IIU J526 BKW ROYIL-STAR	
	or	
Washington Natl (DCA)	BLUES-DP IIU J526 BKW SHNON (RNAV)-STAR ... GATWY-DP IIU J526 BKW WZRRD-STAR	
	or	
West Palm Beach (PBI)	GATWY-DP IIU J526 BKW ELDEE (RNAV)-STAR (DME/DME/IRU OR GPS) PLESS-DP BNA J73 SZW WLACE (RNAV)-STAR	

SPECIAL HIGH ALTITUDE DIRECTIONAL ROUTES

Terminals	Route	Effective Times (UTC)
Traffic overflying Kansas City VORTAC (MCI to IAD: MCI	J24 IIU J8 HVQ ROYIL-STAR	
	or	
	J24 IIU J8 HVQ SHNON (RNAV)-STAR	
Traffic overflying Lamoni VORTAC (LMN) to IAD: LMN	(GPS or DME/DME-IRU equipped) J64 FWA APE AIR MGW VERNI ESL ROYIL-STAR	
	or	
	(GPS or DME/DME-IRU equipped) J64 FWA APE AIR MGW VERNI ESL SHNON (RNAV)-STAR	
Traffic overflying Saint Louis VORTAC (STL) to IAD: STL	IIU J8 HVQ ROYIL-STAR	
	or	
	IIU J8 HVQ SHNON (RNAV)-STAR	

Q ROUTES REGULATORY

Q1, Q3, Q5, Q7, Q9 and Q11 are preferred single direction (Southbound) Q routes; flight planning Northbound not authorized.

Q routes are RNAV routes that require the use of GNSS or DME/DME/IRU RNAV, unless otherwise indicated. Please note that this section does not apply to Q routes in the Gulf of Mexico. Gulf of Mexico Q routes are explained in the Southeast and South Central A/FD volumes. Q routes listed in this A/FD volume have at least part of one of their leg segments within this volume's area of coverage.

GNSS and DME/DME/IRU RNAV operations are authorized along Q routes at FL 180 and above. GNSS and DME/DME/IRU RNAV MEAs will only be published if above FL 180.

DME facilities that have been assessed for RNAV operations are listed below. Q routes with no DME facilities listed are limited to GNSS RNAV operations only. Those routes will have an enroute chart note "GNSS REQUIRED".

Route	Segment	DME
Q1	ELMAA-ERAVE	BTG, OLM, HQM, HUH, UBG
	ERAVE-EASON	BTG, OLM, HQM, HUH, LTJ, CVO, DSD, OED, UBG, ONP, EUG
	EASON-EBINY	CVO, DSD, OED, BTG, UBG, ONP, EUG, LMT
	EBINY-ENVIE	CVO, OED, EUG, LMT, RBL, ENI, ONP, FJS
	ENVIE-ETCHY	OED, PYE, OAK, LIN, ECA, LMT, RBL, ENI, SAC, FJS
	ETCHY-POINT REYES	LIN, ECA, RBL, ENI, SAC, OAK
Q2	BOILE-HEDVI	HEC, PDZ, OCN, PMD, LAX, RZS, IPL, TRM, PKE, BLH, EED, BZA, GBN, PXR
	HEDVI-HOBOL	BZA, GBN, BLH, EED, PXR, IPL, TFD, DRK, TUS
	HOBOL-ITUCO	TFD, GBN, BLH, PXR, TUS, CIE, SSO
	ITUCO-NEWMAN	EWM, TFD, PXR, CIE, SSO, TUS, TCS
Q3	FEPOT-FAMUK	OLM, TOU, HQM, CVO, BTG, DSD, LTJ, UBG, ONP, EUG
	FAMUK-FRFLY	BTG, DSD, OED, CVO, EUG, ONP, UBG, RBL, LMT
	FRFLY-FINER	OED, EUG, RBL, LMT, ENI, CVO, FJS
	FINER-FOWND	OED, PYE, ECA, LIN, OAK, ENI, RBL, LMT, SAC, FJS
Q4	FOWND-POINT REYES	LIN, ECA, PYE, RBL, SAC, ENI
	BOILE-HEDVI	HEC, PDZ, OCN, PMD, LAX, RZS, IPL, TRM, PKE, BLH, EED, BZA, GBN, PXR
	HEDVI-SCOLE	EED, BLH, BZA, GBN, TRM, IPL, TFD
	SCOLE-SPTFR	EED, BLH, BZA, GBN, TRM, IPL, TFD
	SPTFR-ZEBOL	EED, IPL, BZA, GBN, TFD, PXR, BLH
	ZEBOL-SKTR	PXR, BLH, BZA, GBN, TFD, TUS, SSO, CIE, SVC, TCS
	SKTR-EL PASO	EWM, CUS, SVC, TCS, SSO, CIE, ELP, DMN, CME
Q5	HAROB-HISKU	OLM, ONP, CVO, EUG, HQM, UBG, BTG, LTJ, DSD, HUH
	HISKU-HARPR	ONP, CVO, EUG, LTJ, DSD, UBG, BTG, RBL, OED, LMT, FJS, LKV
	HARPR-HOMEG	CVO, EUG, OED, RBL, LMT, ENI, FJS, LKV
	HOMEG-HUPTU	SAC, PYE, LIN, OAK, ECA, LMT, RBL, ENI, OED, FJS
Q7	HUPTU-STIKM	OAK, ECA, PYE, LIN, SAC, ENI, RBL
	JINMO-JOGEN	CVO, HQM, LTJ, UBG, BTG, ONP, IMB, EUG, OLM, DSD, YKM, PDT, SEA
	JOGEN-JUNEJ	LTJ, IMB, UBG, EUG, CVO, RBL, LMT, FMG, DSD, LKV, OED, BTG
	JUNEJ-JAGWA	RBL, LMT, FMG, LIN, SAC, ECA, ENI, MOD, SWR, OAK, LKV, CZQ, AVE, SNS
Q9	JAGWA-AVENAL	OAK, MOD, ECA, EHF, PRB, AVE, SNS, CZQ
	SUMMA-SMIGE	OLM, UBG, SEA, YKM, BTG, ONP, IMB, HQM, PDT, EUG, LTJ, CVO, DSD, OED, EPH, MWH
	SMIGE-SUNBE	IMB, UBG, EUG, IMB, RBL, LMT, FMG, SAC, OED, CVO, LKV, DSD, BTG
	SUNBE-REBRG	RBL, LMT, FMG, SAC, ECA, MVA, CZQ, OAK, EHF, PMD, LKV, LIN, MOD, AVE, OED, SWR
Q11	REBRG-DERBB	CZQ, PMD, EHF, LAX, RZS, AVE, MOD, ECA
	PAAGE-PAWLI	EPH, UBG, CVO, EUG, HQM, YKM, OLM, PDT, BTG, ONP, IMB, LTJ, DSD, LKV, OED, SEA
	PAWLI-PITVE	EUG, FMG, SAC, IMB, LKV, OED, DSD, RBL, LMT, CVO, REO
	PITVE-PUSHH	FMG, SAC, LIN, SWR, MOD, OAL, RBL, LKV, LMT, MVA, CZQ
	PUSHH-LOS ANGELES	SAC, ECA, FMG, LIN, OAL, MOD, EHF, LAX, PMD, PDZ, HEC, OCN, CZQ, AVE, RZS
Q13	All segments	None; GNSS required
Q15	All segments	None; GNSS required
Q19	PLESS-NASHVILLE	ENL, GQO, PXV, BNA, IUI, FAM, BWG, CSX
Q20	CORONA-HONDS	CNX, ABQ, ACH, ONM, TXO, LVS, TCC, CME
	HONDS-UNNOS	CNX, INK, CME, TXO, TCC
	UNNOS-FUSCO	FST, ACH, INK, CME, SJT, TXO, TCC
Q21	FUSCO-JUNCTION	ABI, CWK, CSI, INK, LZZ, JCT, SJT, STV, FST
	JONEZ-RAZORBACK	BYP, EOS, TUL, TXK, ADM, RZC, OKM
Q22	GUSTI-ACYST	AEX, DAS, MCB, LLA, BTR, LCH, HRV, LFT, LEV
	OYST-OCMES	RQR, GCV, MCB, BTR, PCU, GPT, HRV, LEV, SJI
	ACMES-CATLN	SJI, MGM, MCB, BFM, GPT, GCV, HRV, CEW, MVC, PCU, MEI

Route	Segment	DME
Q23	FORT SMITH-RAZORBACK	OKM, RZC, EOS, TUL
	LAKE CHARLES-BATON ROUGE	AEX, DAS, LCH, MCB, LFT, BTR
Q24	BATON ROUGE-IRUBE	AEX, LEV, MCB, LCH, RQR, HRV, BTR, GCV, MCB, PCU, SJI, LBY
	IRUBE-PAYTN	GCV, MCB, JYU, PCU, MEI, HRV, CEW, SJI
Q25	MEEOW-WALNUT RIDGE	ELD, MEM, LIT, FAM, RZC
	WALNUT RIDGE-WLSUN	MEM, STL, BWG, PXV, ENL, FAM, ARG, BNA, CSX, TTH
Q26	WLSUN-POCKET CITY	BWG, PXV, ENL, BNA, TTH
	WALNUT RIDGE-DEVAC	LIT, JKS, GQO, MEM, BNA, FAM, ARG, DYR, VUZ, RMG
Q27	FORT SMITH-ZALDA	OKM, SGF, RZC, EOS, TUL
	GRAZN-PYRMD	EIC, LIT, ELD, OKM, TXK
Q28	PYRMD-HAKAT	ARG, LIT, FAM, ELD, SGF, RZC, MEM, TXK
	HAKAT-ESTEE	ARG, LIT, FAM, SGF, MEM
Q29	ESTEE-POCKET CITY	ARG, CSX, FAM, PXV, ENL, MEM, STL, BWG, TTH, BNA
	HARES-MEMPHIS	MEM, ARG, LIT, JAN, ELD, SQS
Q30	MEMPHIS-SIDAE	MEM, PXV, BNA, BWG, ARG, ENL
	SIDAE-POCKET CITY	PXV, TTH, BWG, ENL
Q31	SIDON-VULCAN	GLH, MEM, VUZ, JAN, JYU, MEI, MGM, SQS, RMG
	DHART-JODOX	SQS, LIT, TXK
Q32	JODOX-MARVELL	SQS, LIT, ELD, MEM, ARG
	MARVELL-TIIDE	ARG, BWG, PXV, FAM, LIT, MEM, ENL, TTH
Q33	TIIDE-POCKET CITY	BWG, PXV, ENL, TTH
	EL DORADO-GAGLE	AEX, JAN, MEM, SQS, SWB, ELD, LIT, TXK
Q34	GAGLE-CRAMM	JAN, SQS, MEM, ARG, VUZ, BNA, LIT
	CRAMM-NASHVILLE	BWG, MEM, VUZ, BNA, GQO
Q35	NASHVILLE-SWAPP	BWG, IIU, PXV, VXV, BNA, GQO
	DHART-LITTLE ROCK	AEX, ELD, LIT, TXK, SWB, ARG, MEM, SQS
Q36	LITTLE ROCK-PROWL	ELD, SGF, FAM, LIT, ARG, MEM, RZC, CSX, STL
	TEXARKANA-MATIE	LIT, SWB, TXK, BYP, EIC, ELD, SQS
Q37	MATIE-MEMPHIS	LIT, ARG, MEM, ELD, SQS
	MEMPHIS-SWAPP	BWG, ARG, MEM, MKL, SQS, PXV, BNA, GQO, IIU, VXV
Q38	KIMBERLY-NEERO	LTJ, PDT, DSD, IMB, LKV, BOI, REO, BAM, SDO
	NEERO-WINEN	BQU, SDO, BAM, REO, BVL, ILC, DTA, ELY, CDC, MLF, BCE
Q39	WINEN-CORKR	CDC, BCE, BLD, ILC, MLF, TBC, PGS, INW, DRK
	CORKR-DRAKE	TBC, BCE, BLD, DRK, PGS, FLG, GCN, INW, TFD
Q40	RAZORBACK-TWITS	RZC, MEM, SGF, BUM, TUL, EOS, FAM, ARG, LIT
	TWITS-DEPEC	MEM, GQO, BNA, BWG, FAM, ARG, PXV, IIU
Q41	DEPEC-NASHVILLE	GQO, BWG, BNA, PXV, IIU
	NASHVILLE-SWAPP	VXV, BWG, BNA, GQO, PXV, IIU
Q42	ROKIT-INCIN	DAS, LCH, SWB, IAH, LFK, HUB, AEX
	INCIN-LAREY	JAN, MCB, SWB, AEX
Q43	LAREY-BESOM	JAN, JYU, MEI, SQS, VUZ
	ALEXANDRIA-DOOMS	AEX, SWB, LCH, JAN, HEZ, MCB
Q44	DOOMS-WINAP	JAN, SQS, MEI, MCB
	WINAP-MISLE	MEI, VUZ, JYU
Q45	KIRKSVILLE-STRUK	CID, IOW, UIN, LMN, IRK, BDF, STL, DEC, ENL, CSX
	STRUK-DANVILLE	ENL, IOW, UIN, BDF, DEC, STL, CSX, SPI, TTH, BVT, JOT, VHP, OXI, ENL, OKK, OBK, GIJ, FWA, GSH, IRK
Q46	DANVILLE-MUNCIE	GIJ, SPI, BDF, OBK, OKK, VHP, BVT, DEC, GSH, FWA, JOT, TTH, OXI, ROD, FLM
	MUNCIE-HIDON	FLM, VHP, GSH, TTH, GIJ, OKK, FWA, ROD, OXI, CRL, GSH, APE, DJB, DXO, HNN, AIR, HVQ, CXR, EWC
Q47	HIDON-BUBAA	AIR, APE, HNN, CXR, HVQ, EWC, DJB
	BUBAA-PSYKO	AIR, APE, DJB, CXR, HNN, EWC, SLT, CSN, JHW, ETG, PSB
Q48	PSYKO-BRANAN	PSB, JHW, EWC, AIR, ETG, CSN, EMI, SLT
	BRANAN-MAALS	EMI, SLT, CSN, EWC, PSB, ETG, SAX, RBV, HNK, HUO, SIE
Q49	MAALS-SUZIE	ETG, EMI, CSN, HUO, SIE, JFK, PSB, SLT, HNK
	SUZIE-EAST TEXAS	JFK, EMI, PSB, SLT, HNK, SIE, RBV, SAX, HUO, CYN
Q50	EAST TEXAS-ELIOT	HUO, RBV, EMI, CYN, SAX, JFK, PSB, HNK
	DEFUN-HEVVN	PIE, PZD, CRG, SZW, TAY, JYU, CEW, MGM, OTK, CRG
Q51	HEVVN-PLYER	PIE, ORL, OMN, SRQ, TAY, LAL, CRG, SZW, PZD
	PLYER-SWABE	PIE, ORL, OMN, SRQ, TAY
Q52	SWABE-ST PETERSBURG	LAL, ORL, OMN, SRQ, PHK, PIE
	ST PETERSBURG-CYPRESS	PHK, PBI, SRQ, PIE, VRB, ORL, FLL, LAL, OMN

Route	Segment	DME
Q106	SMELZ–BULZI	LAL, ORL, OMN, PHK, PIE, CRG, VRB, TAY, OTK, PZD, AMG, SZW
	BULZI–DRABK	AMG, PZD, TAY, CRG, SZW, MGM, OTK, JYU, CEW, SJI
	DRABK–GADAY	MGM, PZD, OTK, JYU, SZW, CEW, SJI
Q108	GADAY–HKUNA	CEW, JYU, MGM, SZW, RRS, PZD, MAI, OTK, GEF, MGR, TAY, AMG, CRG
Q110	THNDR–JAYMC	SRQ, VRB, PHK, PIE, LAL, VKZ, ORL, PBI
	JAYMC–RVERO	VKZ, VRB, PHK, PIE, LAL, SRQ, ORL, OMN, PBI, DHP
	RVERO–KPASA	OMN, PIE, PBI, SRQ, ORL, LAL
	KPASA–BRUTS	SRQ, VRB, ORL, PHK, TAY, PIE, OMN, OTK, LAL, CRG, SZW, AMG
Q112	BRUTS–GULFR	OMN, AMG, CRG, SZW, PIE, TAY, PZD, OTK
	GULFR–FEONA	TAY, MCN, PZD, CRG, OTK, SZW, AMG, MCN, ATL, MGM
	DEFUN–HEVVN	PIE, OTK, CRG, OMN, LAL, SZW, SRQ, ORL, VRB
	HEVVN–INPIN	JYU, PZD, CEW, SZW, MGM, OTK, TAY, AMG, PIE, CRG
Q116	KPASA–BRUTS	SRQ, VRB, ORL, PHK, TAY, PIE, OMN, OTK, LAL, CRG, SZW, AMG
	BRUTS–GULFR	OMN, AMG, CRG, TAY, LAL, PZD, SZW, OTK
	GULFR–CEEYA	MCN, AMG, PZD, OTK, SZW, TAY
Q118	KPASA–BRUTS	SRQ, VRB, ORL, PHK, TAY, PIE, OMN, OTK, LAL, CRG, SZW, AMG
	BRUTS–LENIE	OMN, AMG, CRG, TAY, LAL, PZD, SZW, OTK, MCN
Q501	VIXIS–GOPHER	ECK, FNT, APN, SSM, GRR, MBL, SAW, BAE, MNM, DLL, AUW, ODI, STE, FGT, EAU
		DLH, GEP, BRD, MCW, MSP, ASP, TVC, GRB, RWF
	GOPHER–SOBME	FGT, BRD, MCW, GEP, ABR, FAR, DLH, ODI, RWF, FSD
Q502	KENPA–GOPHER	SSM, FNT, ECK, APN, SAW, GRB, BAE, DLL, AUW, ODI, FGT, DLH, EAU, MCW,
		MSP, MNM, ASP, TVC, GEP, RWF, BRD
Q504	GOPHER–SOBME	FGT, DLH, ODI, MCW, ABR, FAR, MSP, GEP, RWF, FSD, BRD
	NOTAP–CESNA	SSM, ECK, APN, GLR, PLN, ISQ, MNM, DLL, RHI, DLH, GEP, FGT, ODI, ASP, TVC,
Q505		SAW, GRB, BRD
	CESNA–HEMDI	ODI, GEP, DLH, FGT, RWF, FAR, AXN, FSD, ABR, DLL, BRD
	OMAGA–RIMBE	SSM, TVC, ASP, SAW, GRB
	RIMBE–CESNA	SSM, RHI, DLL, DLH, GEP, FGT, TVC, SAW, GRB, BRD, ODI
	CESNA–HEMDI	GEP, DLH, FGT, RWF, FAR, AXN, FSD, ABR, BRD, ODI, GRB

RNAV Routing Pitch and Catch Points

The purpose of this section of the Special High Altitude Routes is to present user routing options for flight within the initial HAR Phase I expansion airspace. Users are able to fly user-preferred routes, referred to as non-restrictive routing (NRR), between specific fixes described by **pitch** (entry into) and **catch** (exit out of) fixes in the HAR airspace. Pitch points indicate an end of departure procedures, preferred IFR routings, or other established routing programs where a flight can begin a segment of NRR. The catch point indicates where a flight ends a segment of NRR and joins published arrival procedures, preferred IFR routing, or other established routing programs.

The HAR Phase I expansion airspace is defined as that airspace at and above FL 350 in fourteen of the western and southern Air Route Traffic Control Centers (ARTCCs). The airspace includes Minneapolis (ZMP), Chicago (ZAU), Kansas City (ZKC), Denver (ZDV), Salt Lake City (ZLC), Oakland (ZOA), Seattle Centers (ZSE), Los Angeles (ZLA), Albuquerque (ZAB), Fort Worth (ZFW), Memphis (ZME), and Houston (ZHU). Jacksonville (ZJX) and Miami (ZMA) are included for east-west routes only.

To develop a flight plan, select pitch and catch points based upon your desired route across the Phase I airspace. Filing requirements to pitch points, and from catch points, remain unchanged from current procedures. For the portion of the route between the pitch and catch points, non-restrictive routing is permitted.


Where pitch points for a specific airport are not identified, aircraft should file an appropriate departure procedure (DP), or any other user preferred routing prior to the NRR portion of their routing. Where catch points for a specific airport are not identified aircraft should file, after the NRR portion of their routing, an appropriate arrival procedure or other user preferred routing to their destination.

Additionally, information concerning the location and schedule of Special Use Airspace (SUA) and Air Traffic Control Assigned Airspace (ATCAA) can be found on the Web Site: <http://sua.faa.gov/sua/Welcomes.do>. ATCAA refers to airspace in the high altitude structure supporting military and other special operations. Users are encouraged to file around these areas when they are scheduled to be active, thereby avoiding unplanned reroutes around them.

In conjunction with the HAR program RNAV routes have been established to provide for a systematic flow of air traffic in specific portions of the enroute flight environment. The designator for these RNAV routes begin with the letter Q, for example, Q-501. Where those routes aid in the efficient orderly management of air traffic they will be published as preferred IFR routes.

High Altitude Redesign (HAR) Phase One Expansion Airspace

Except as noted, flights entering HAR expansion airspace may pitch at the airspace boundary, at the vertical pitch line, or at the fixes listed on the following page.

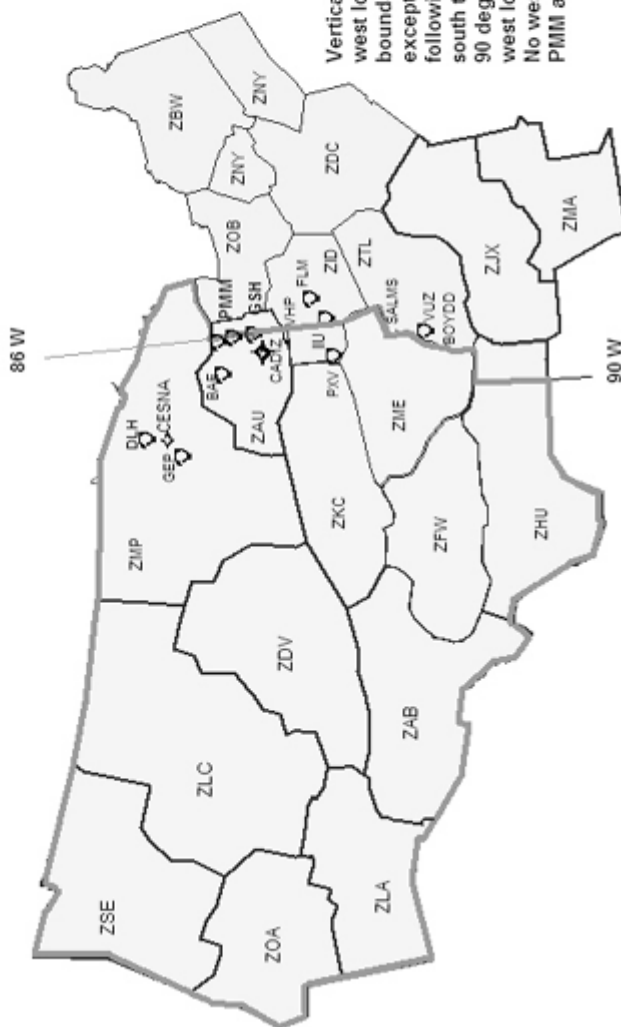

Vertical Pitch Line: 86 degrees west longitude from the ZMP/ZAU boundary to the ZME/ZID boundary, except between PMM and GSH, then following the ZME east boundary south to the ZHU boundary. Then west to 90 degrees west longitude, the 90 degrees west longitude to the ZHU southern boundary. No westbound traffic between PMM and GSH.

HAR Special High Altitude Pitch (entry) Points for Nonrestrictive Routing for Airports Located Outside HAR Phase I Expansion Airspace

Westbound traffic originating outside of HAR airspace entering ZMP, ZAU, ZKC and ZME can begin non-restrictive routing over any of the following pitch points (listed from north to south):

DLH, CESNA, GEP, BAE, MKG, GRR, PMM, GSH, CADIZ, FWA, VHP, FLM, IIU, PXV, SGF, RZC, BNA, SALMS, VUZ, BOYDD, MIE.

Traffic originating outside of HAR airspace may also begin Nonrestrictive Routing upon crossing the pitch line depicted on the associated graphic.

HAR Special High Altitude Pitch Points for Airports Located Within (below) HAR Phase I Expansion Airspace

This section lists pitch points for airports within the HAR Phase I expansion airspace.

Albuquerque	ABQ, GUP, HANOS or ZUN
Austin	ABI, FUZ, JCT, MQP, NAVYS, SJT or TNV
Boca Raton, FL	TBIRD KPASA Q118 LENIE or TBIRD KPASA Q116 CEEYA or TBIRD KPASA Q110 FEONA or TBIRD SMELZ Q106 BULZI or TBIRD SMELZ Q106 GADAY
Burbank includes Santa Monica and Van Nuys	GMN, MARKS or DAG LAS or HEC EED or PMD BLH
Chicago Terminal Area	IOW, PLL275065, MZV or BAE
Dallas/Fort Worth Terminal Area	ABI, LBB, GTH, CDS, MRMAC, IRW, TUL, MLC, TXK ELD, SWB or Aircraft destined the Chicago terminal area Except MDW EAKER MIDEE BDF BRADFORD-STAR Or MLC J105 SGF BDF BRADFORD-STAR
Denver Terminal Area	PUB, DVC, DBL, RLG, EKR, LAR, MBW, CYS, BFF, HANKI, NATTI, ASHBY, BELKE, CABET, WEEDS, OR BINKE
Fort Lauderdale (or) Fort Lauderdale Executive	THNDR KPASA Q118 LENIE or THNDR KPASA Q116 CEEYA or THNDR KPASA Q110 FEONA or THNDR SMELZ Q106 GADAY or THNDR SMELZ Q106 BULZI
Houston Bush	LIT, ELD, MLC, JCT or Aircraft destined Atlanta Terminal Area LCH Q24 PAYTN HONIE-RNAV STAR or Aircraft joining J37 to the northeast, GUSTI SID GUSTI Q22 CATLN or Aircraft joining J42 to the northeast, EL DORADO SID ELD Q32 J42

380	HIGH ALTITUDE REDESIGN (HAR) PHASE 1 RNAV ROUTING
Houston Hobby	LIT, ELD, MLC, JCT, or Aircraft joining J42 to the northeast, EL DORADO SID ELD Q32 J42
Jacksonville, FL	TAY
Kansas City Terminal Area	TIFTO, CATTS or KENTN
Los Angeles, includes Ontario	GMN, RZS or DAG LAS or TRM EED or TRM PKE
Las Vegas	DOBNE, MOSBI, NICLE, TRALR or ZELOT
Long Beach includes Orange County	GMN SNS, EHF, LANDO or TRM PKE or TRM EED
Memphis	BNA, HAAWK, SALMS or SQS
Miami Terminal Area	WINCO KPASA Q118 LENIE or WINCO KPASA Q116 CEEYA or WINCO KPASA Q110 FEONA or WINCO SMELZ Q106 GADAY or WINCO SMELZ Q106 BULZI
Milwaukee	GREAS
Minneapolis Terminal Area*	ONL, ABR, FAR, OBH, OVR, FOD
New Orleans Terminal Area	AEX, MEI, SQS, KAPLN
Orlando Terminal Area	WEBBS BRUTS Q118 LENIE or WEBBS GULFR Q116 CEEYA or WEBBS BULZI Q106 GADAY or WEBBS FEONA or WEBBS BULZI
Palm Beach, FL	TBIRD KPASA Q118 LENIE or TBIRD KPASA Q116 CEEYA or TBIRD KPASA Q110 FEONA or TBIRD SMELZ Q106 BULZI or TBIRD SMELZ Q106 GADAY
Palm Springs	TRM JOTNU BLD or TRM EED or TRM PKE
Phoenix	CHILY, CIE, CULTS, RSK, DOVEE, GCN, MESSI, SJN, DRYHT or MOHAK
Portland, OR	PDT, TIMEE

Salt Lake City	HVE, DTA, MLF, BCE, OAL, MTU, BVL, OCS, TWF, DBS, BPI or TCH J56 CHE or TCH J173 EKR
Saint Louis	VIH, MAP, MYERZ, MCM or HLV MCI
San Antonio Terminal Area	FUZ, SJT, MQP, ABI or Aircraft North of LFK, LFK or Aircraft South of HUB, ELA or Aircraft South of LFK and North of HUB LCH
San Diego	TRM EED or TRM PKE or TRM JOTNU BLD
San Francisco Bay Area	GALLI, INSLO, HAROL JSICA
Oakland	GALLI, INSLO, HAROL JSICA
San Jose	GALLI or INSLO
Seattle	BLUIT
Southwest Florida Airports (RSW/FMY)	JOCKS KPASA Q118 LENIE or JOCKS KPASA Q116 CEEYA or JOCKS KPASA Q110 FEONA or JOCKS SMELZ Q106 GADAY or JOCKS SMELZ Q106 BULZI
Tampa Terminal Area	FEONA, BULZI or BRUTS Q118 LENIE or GULFR Q116 CEEYA or BULZI Q106 GADAY

*MSP area departures with destinations east of 93 degrees west longitude via preferred IFR routing.

Catch Points for Airports Located Outside HAR Phase I Expansion Airspace

This section lists exit points for aircraft destined to specific destinations which are outside the HAR Phase I airspace.

Atlanta Terminal Area	Aircraft through ZME airspace from ZKC airspace east of FAM, Pless Q19 BNA or Aircraft through ZME airspace from ZKC airspace west of FAM, ARG Q26 DEVA or MEM or Aircraft through ZME airspace from ZID airspace west of a line from VHP to BWG, BNA or Aircraft through ZME airspace from ZID airspace east of a line from VHP to BWG, BWG or Aircraft through ZME airspace from ZFW airspace, MEM or MEI HONIE (RNAV)–STAR or PATYN HONIE (RNAV)–STAR
-----------------------	--

382	HIGH ALTITUDE REDESIGN (HAR) PHASE 1 RNAV ROUTING
Baltimore–Washington*	GIJ, GEP, FLM, IIU, BAE, VHP, WHETT, BNA or VUZ
Boston*	GEP, CRL, ECK, IIU, BNA or VUZ
Buffalo*	GEP, CRL
Hartford Bradley*	GEP, CRL
Canton–Akron*	GIJ, VHP, GEP
Charlotte	BNA, VUZ
Cincinnati Terminal Area	BNA, PXV or Aircraft north of SLC, JOT or Aircraft over or south of SLC, ENL or SLC or SFO departures, ENL, JOT
Cleveland Terminal Area*	OBK
Detroit Terminal Area	BAE MKG POLAR–STAR or VHP FWA MIZAR–STAR
Detroit Young	VHP FWA or LAN SPRTN–STAR
Indianapolis Terminal Area	BIB, SPI, JOT
Louisville	ENL, MEM
Newark*	GEP, VHP, FLM, IIU, BNA, VUZ or IOW GIJ J554 CRL J584 SLT FQM
New York Kennedy*	GEP, VHP, FLM, IIU, BNA, VUZ or DBQ J94 PMM J70 LVZ LENDY–STAR
New York LaGuardia*	GIJ, GEP, VHP, BAE, FLM, IIU, BNA, VUZ
Philadelphia Terminal Area*	GIJ, GEP, VHP, BAE, WHETT, BNA, VUZ
Pittsburgh Terminal Area*	VHP, GIJ, BAE, GEP
Pontiac	LFD, LAN, VHP, FWA, GEP
Providence	JHW, HEMDI, CESNA, GEP, GRB, TVC, ASP, VHP, IIU, BNA, VUZ
Raleigh–Durham	FLM, IIU, BNA, VUZ
Toronto Terminal Area	ECK, SVM, SSM, GEP
Teterboro*	GEP, VHP, CRL, BNA, VUZ
Washington Dulles/National*	GIJ, GEP, FLM, IIU, BAE, VHP, WHETT, BNA, VUZ
White Plains*	GEP, VHP, CRL, FLM, IIU, BNA, VUZ
Willow Run*	LAN, LFD, VHP, FWA, GEP
*Eastbound aircraft over flying ZMP center airspace entering Toronto center airspace, file direct SSM or via J63, J522 Q505, Q504, Q502, Q501 or Entering ZAU or ZOB airspace from north of DPR J16 MCW, GEP or Entering ZAU or ZOB airspace from or south of DPR J16 MCW, CRL.	

Catch Points for Airports Located Within (below) HAR Phase I Expansion Airspace

This section lists exit points for aircraft destined to airports which are below HAR Phase I airspace.

Albuquerque Terminal Area	CURLY CURLY–STAR or ESPAN FRIHO–STAR or LAVAN LAVAN–STAR or FTI FRIHO–STAR or MIERA MIERA–STAR
Austin Terminal Area	Aircraft west of a north–south line at LFK, BLEWE or Aircraft east of a north–south line at LFK, IDU or LLO
Boca Raton, FL	CEW DEFUN Q112 INPIN SHDAY (RNAV)–STAR Aircraft through ZHU remain south of ZME and ZTL airspace or DEFUN Q112 INPIN SHDAY (RNAV)–STAR Aircraft through ZHU remain south of ZME and ZTL airspace or SZW INPIN SHDAY (RNAV)–STAR
Chicago Midway	CVA MOTIF–STAR or PIA MOTIF–STAR or DBQ CVA MOTIF–STAR or LMN MOTIF–STAR
Chicago O'Hare Terminal Area	GEP DLL MSN JVL JANESVILLE–STAR or TVC PULLMAN–STAR or FOD DBQ JVL JANESVILLE–STAR or MCW JANESVILLE–STAR or GCK IRK BRADFORD–STAR
Dallas/Fort Worth Terminal Area	IRW, LOSZY, FSM, LIT, SQS, MLU, AEX, JUMBO, TQA, TURKI, HEATR Aircraft through ZME airspace from north and west of PXV, RZC, Q23 FSM or Aircraft through ZME airspace from east of PXV, PXV Q25 MEEOW or Aircraft through ZME airspace from J6 down to, but not including J52, LIT, SQS or Aircraft through ZME airspace from J52 and south of J52, SQS

384	HIGH ALTITUDE REDESIGN (HAR) PHASE 1 RNAV ROUTING	
Denver Terminal Area	OATHE DANDD–STAR or HGO QUAIL–STAR or LOPEC–STAR or ALS LARKS–STAR or HBU POWDR–STAR or EKR TOMSN–STAR or CHE TOMSN–STAR or BFF LANDR–STAR or LBF SAYGE–STAR or HCT SAYGE–STAR or RSK LARKS–STAR or LAA QUAIL–STAR or GCK J154 RYLIE DANDD–STAR or OCS J154 ALPOE RAMMS–STAR or YANKI J114 SNY LANDR–STAR or Aircraft filed BIL or east, MBW RAMMS–STAR	
Ft Lauderdale or Ft Lauderdale Executive	CEW DEFUN Q104 PIE SWAGS (RNAV)–STAR Aircraft through ZHU airspace remain south ZME and ZTL airspace or SZW HEVVN Q104 PIE SWAGS (RNAV)–STAR	
Houston Bush	CRP, CVE, LLO, LUKIY, SAT or Aircraft south and east of LLA, JEPEG or MISLE Q40 AEX or Aircraft north and east of SJI, SJI or Aircraft east of PXV, PXV Q31 DHART SWB or Aircraft north and west of PXV, PROWL Q33 DHART SWB	
Houston Hobby	CRP, ELLVR, SAT, SWB or Aircraft south and east of GIRLY, KCEEE or Aircraft north and east of SJI, SJI or BESOM Q38 ROKIT ROKIT–STAR or Aircraft east of PXV, PXV Q29 HARES SWB or Aircraft north and west of PXV, PROWL Q33 DHART SWB	
Jacksonville	GADAY ZOOSS TAY Aircraft through ZHU airspace remain south of ZME and Z airspace or ZOOSS TAY	

John Wayne–Orange County	HEC, PGS, BLD or Aircraft south of TBC from ZAB airspace, HIPPI
Kansas City Terminal Area	LMN BRAYMER–STAR or PWE ROBINSON–STAR or EMP JHAWK–STAR
Las Vegas	DILCO, LIDAT, IGM or Aircraft over PGA or north of PGA KSINO or Aircraft south of PGA PGS LYNBY
Los Angeles Terminal Area	Aircraft North of TBC, HEC, PGS or Aircraft South of TBC from ZAB airspace, HIPPI, MESSI
Miami Terminal Area	CEW DEFUN Q104 CYY DEEDS (RNAV)–STAR Aircraft through ZHU airspace remain south ZME and ZTL airspace or SZW HEVBN Q104 CYY DEEDS (RNAV)–STAR
Minneapolis Terminal Area	Aircraft from north, west, south, FAR GOPHER–STAR or RWF SKETR–STAR or ALO KASPR–STAR or BRD GOPHER–STAR or BAE EAU CLAIRE–STAR or FOD TWOLF–STAR
Memphis Terminal Area	ARG, BWG, FSM, PXV, LIT, RZC, SQS, VUZ, BNA, GQO, ELD
Naples, FL	CEW DEFUN Q104 PLYER PIKKR (RNAV)–STAR Aircraft through ZHU AIRSPACE remain south of ZME and ZTL airspace or SZW HEVBN Q104 PLYER PIKKR (RNAV)–STAR
Nashville	CCT, GHM, GUITR, TINGS, VOLLS
New Orleans Terminal Area	BLUEZ, GPT, LCH, MCB, TBD, FATSO
Oakland	ILA or KATTS PAMMY or Aircraft over or south of a line ILC J16 DVC REANA KATTS PAMMY or Aircraft from north of ILC, JOPER PAMMY or KATTS PAMMY or Aircraft over or south of ILC, REANA KATTS PAMMY
Orlando Terminal Area	GADAY Q108 CLAWZ LEESE–STAR Aircraft through ZHU airspace remain south of ZME/ZTL airspace or OTK LEESE–STAR

Palm Beach, FL	CEW DEFUN Q112 INPIN GULLO (RNAV)–STAR Aircraft through ZHU airspace remain south of ZME and Z airspace or SZW INPIN GULLO (RNAV)–STAR
Phoenix	CORKR DRK or Aircraft from ZDV airspace, GUP or Aircraft from ZAB airspace, ZUN, MOHAK, SSO or VYLLA TUS
Phoenix Satellites	FLG, SSO, MOHAK or VYLLA, TUS
Portland, OR Terminal Area	ARNIT BONVL–STAR or LARNO BONVL–STAR or MOXEE MOXEE–STAR
St. Louis Terminal Area	SGF TRAKE–STAR or BUM TRAKE–STAR or ANX TRAKE–STAR or LMN IRK RIVRS–STAR or RBS VANDALIA–STAR
Salt Lake City Terminal Area	JNC J12 HELPR SPANE–STAR or EKR MTU SPANE–STAR or BCE DTA–TCH or MLF DTA–TCH or BVL BONNEVILLE–STAR or BYI BEARR–STAR or PIH BEARR–STAR or DBS BRIGHAM CITY–STAR or JAC BRIGHAM CITY–STAR or BPI BRIGHAM CITY–STAR or OCS BRIGHAM CITY–STAR
San Diego Terminal Area	EED, LAX, GBN
Santa Ana	HEC, PGS, BLD, HIPPI
San Antonio Terminal Area	IDU, CSI, JCT, LLO, CRP, LRD or West of a north–south line at LFK, BLEWE or East of a north–south line at LFK, IDU

San Francisco	FMG GOLDEN GATE--STAR
	or
	MVA MODESTO--STAR
	or
	ENI GOLDEN GATE--STAR
	or
	OAL MODESTO--STAR
	or
	South of a line ILC to DVC, REANA KATTS OAL MODESTO--STAR
San Jose	FMG HYP EL NIDO--STAR
	or
	OAL HYP EL NIDO--STAR
	or
	ENI GOLDEN GATE--STAR
	or
Seattle Terminal Area	South of a line ILC to DVC, REANA KATTS KICHI CANDA EL NIDO--STAR
	Aircraft From northeast, southeast, south, TEMPL GLASR--STAR
	or
	SUNED CHINS--STAR
	or
Southwest Florida Airports RSW and FMY	BTG OLMYPIA--STAR
	CEW DEFUN Q104 SWABE JOSFF--STAR
	Aircraft through ZHU airspace remain south of ZME and ZTL airspace
	or
	SZW HEVFN Q104 SWABE JOSFF--STAR
Tampa Terminal Area	
	CEW DEFUN Q104 HEVFN DARBS--STAR
	Aircraft through ZHU airspace remain south of ZME and ZTL airspace
	or
	SZW DARBS--STAR
Tucson	DRK PXR
	or
	MOHAK GBN

VISUAL FLIGHT RULES (VFR) WAYPOINTS

VFR Waypoint names consist of five letters beginning with "VP". Stand-alone VFR Waypoints are portrayed on VFR Charts using the same four-point star symbol currently used for Instrument Flight Rules (IFR) Waypoints.

VFR Waypoints collocated with Visual Checkpoints (Visual Reporting Points) are portrayed with a Visual Check Point flag. The VFR Waypoint name is shown in parentheses adjacent to the Visual Check Point name.

VFR Waypoint names are not intended to be pronounceable and shall not be used in ATC communications.

CAUTION: GPS accuracy necessitates extra vigilance for other aircraft when navigating near any fix retrieved from a GPS database.

BALTIMORE–WASHINGTON TERMINAL AREA CHART/FLYWAY CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPAXI	_____	N38°34.57'/W076°20.38'
VPONX	_____	N39°06.65'/W076°55.92'
VPOOP	_____	N38°56.32'/W076°36.90'

BOSTON HELICOPTER CHART

VPBAY	_____	N42°16.17'/W070°49.48'
VPBLT	_____	N42°19.67'/W070°53.40'
VPCGS	_____	N42°22.08'/W071°03.13'
VPEVS	_____	N42°23.52'/W071°04.10'
VPFEN	_____	N42°12.58'/W071°08.88'
VPFRE	_____	N42°25.03'/W071°12.32'
VPGVL	_____	N42°21.88'/W070°52.18'
VPHAM	_____	N42°30.13'/W071°07.15'
VPPIK	_____	N42°20.37'/W071°15.93'
VPQUA	_____	N42°12.10'/W071°04.78'
VPQUB	_____	N42°12.60'/W070°59.83'
VPSPF	_____	N42°24.20'/W071°09.47'
VPTOB	_____	N42°31.42'/W070°59.82'
VPWAN	_____	N42°36.88'/W071°19.45'

BOSTON TERMINAL AREA CHART

VPCOH	COHASSET	N42°13.58'/W070°48.94'
VP CUT	CUTTYHUNK HARBOR	N41°25.50'/W070°55.03'
VPFRA	FRAMINGHAM SHOPPING CENTER	N42°18.16'/W071°23.65'
VP HOL	WOODS HOLE	N41°31.06'/W070°40.60'
VP HUL	HULL	N42°18.20'/W070°55.30'
VP LPT	NANTUCKET GREAT POINT	N41°23.41'/W070°02.78'
VP NED	NEEDHAM TOWERS	N42°18.51'/W071°14.64'
VP PEA	PEABODY SHOPPING CENTER	N42°32.52'/W070°56.69'
VP ROC	ROCKINGHAM RACE TRACK	N42°46.29'/W071°13.57'
VP SCI	SCITUATE	N42°11.89'/W070°43.69'
VP TPT	NANTUCKET THIRD POINT	N41°18.51'/W070°03.37'
VP TUC	TUCKERNUCK	N41°18.31'/W070°15.43'
VP WAK	WAKEFIELD	N42°30.72'/W071°05.24'
VP WAN	WANG TOWERS	N42°36.88'/W071°19.45'

CHARLOTTE SECTIONAL CHART

VPATO	_____	N34°37.37'/W076°31.47'
VPAVA	_____	N34°57.00'/W077°16.50'
VPBFE	_____	N32°16.38'/W080°47.50'
VPBRA	_____	N36°13.75'/W076°08.08'
VP GCE	_____	N36°03.90'/W076°36.42'
VP GHI	_____	N35°15.30'/W075°31.25'
VP GIO	_____	N35°32.50'/W076°37.33'
VP KJU	_____	N35°26.58'/W076°10.22'
VP LMN	_____	N34°55.43'/W077°46.42'
VP MAB	_____	N34°42.20'/W077°03.50'
VP NPO	ISLE OF PALMS	N32°47.78'/W079°46.45'
VP OKY	_____	N35°06.53'/W075°59.17'
VP REP	_____	N32°33.98'/W080°21.82'
VP RRS	_____	N33°25.45'/W079°07.60'
VP UMO	_____	N35°35.63'/W075°28.08'
VP WZO	_____	N36°00.87'/W075°40.07'
VP ZIE	_____	N32°01.62'/W080°53.42'

DENVER TERMINAL AREA CHART/FLYWAY CHART

VPBEN	_____	N39°44.28' /W104°26.00'
VPFTG	_____	N39°44.35' /W104°32.75'
VPNIC	NORTH INTERCHANGE	N39°58.90' /W104°59.27'

HOUSTON TERMINAL AREA CHART/FLYWAY CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPBWY	_____	N29°46.25' /W095°09.24'
VPDTN	_____	N29°46.59' /W095°22.01'
VPGLA	_____	N30°08.32' /W095°06.62'
VPGLB	_____	N30°07.80' /W094°55.70'
VPKTY	_____	N29°47.05' /W095°44.92'
VPPLN	_____	N30°08.80' /W095°50.42'
VPRSN	_____	N29°30.00' /W095°41.00'
VPSND	_____	N29°23.13' /W095°28.86'
VPSNT	_____	N29°49.29' /W094°53.94'
VPTNE	_____	N29°47.48' /W095°03.34'
VPTNW	_____	N29°47.06' /W095°33.81'
VPTRK	_____	N29°24.06' /W095°10.44'

JACKSONVILLE SECTIONAL CHART

VPAFI	_____	N31°49.35' /W081°51.07'
VPAFY	_____	N30°07.00' /W081°21.33'
VPBEC	_____	N29°46.25' /W081°15.10'
VPCJA	_____	N29°30.00' /W081°06.00'
VPCKY	_____	N28°46.50' /W082°34.00'
VPCNY	_____	N28°30.00' /W080°45.00'
VPDAD	DADE CITY	N28°22.57' /W082°11.25'
VPDAR	_____	N31°22.38' /W081°24.13'
VPDFI	_____	N29°00.17' /W081°20.85'
VPDUT	_____	N27°37.70' /W082°09.10'
VPEAR	CLEARWATER BEACH	N27°58.67' /W082°49.83'
VPEGV	_____	N29°39.97' /W081°24.87'
VPFFU	_____	N28°57.08' /W081°00.33'
VPGPE	ST PETE BEACH	N27°43.50' /W082°44.67'
VPHAA	_____	N30°04.02' /W083°40.02'
VPHUC	_____	N28°19.87' /W082°43.77'
VPIWA	MIDWAY	N31°48.33' /W081°25.85'
VPJMY	_____	N29°26.92' /W081°18.27'
VPKER	LAKE PARKER	N28°04.00' /W081°56.00'
VPLEV	_____	N28°48.00' /W080°52.00'
VPLJA	_____	N29°00.00' /W080°51.00'
VPMAI	_____	N30°50.02' /W084°56.63'
VPTLH	_____	N30°32.70' /W083°52.22'
VPXZY	_____	N29°35.00' /W083°10.00'
VPYIW	_____	N30°42.28' /W081°27.25'
VPZIE	_____	N32°01.62' /W080°53.42'

KANSAS CITY SECTIONAL CHART

VPAGO	_____	N37°50.33' /W090°29.03'
VPBEK	_____	N37°15.07' /W092°30.67'
VPDEN	_____	N37°46.75' /W092°19.20'
VPENE	_____	N37°44.75' /W091°55.78'
VPESS	_____	N36°59.48' /W091°00.88'
VPFME	_____	N37°41.00' /W092°38.33'
VPGXY	_____	N37°15.50' /W091°40.17'
VPMBE	_____	N37°11.08' /W090°27.92'
VPMKE	_____	N37°24.47' /W092°40.00'
VPROV	_____	N38°01.72' /W091°12.81'
VPUTT	_____	N37°52.05' /W092°01.20'

390	VFR WAYPOINTS	
WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPWOC		N37°18.03' /W092°18.63
VPWRO		N37°39.12' /W091°45.68
VPXIZ		N37°26.60' /W092°05.42
	KANSAS CITY TERMINAL AREA CHART	
VPATN	ATCHISON	N39°33.62' /W095°07.65
VPBGS	BLUE SPRINGS	N39°01.82' /W094°16.32
VPBSP	BONNER SPRINGS	N39°03.78' /W094°53.10
VPCHB	CHOUTEAU BRIDGE	N39°08.77' /W094°32.03
VPDSO	DE SOTO	N38°58.68' /W094°58.48
VPESG	EXCELSIOR SPRINGS	N39°20.68' /W094°13.77
VPGTB	GARRETSBURG	N39°40.92' /W094°41.45
VPLAT	LATHROP WATER TANK	N39°32.87' /W094°20.00
VPLEN	LENEXA	N38°57.77' /W094°43.68
VPLVL	LONGVIEW LAKE	N38°54.63' /W094°28.28
VPMCL	MC LOUTH	N39°11.65' /W095°12.50
VPNHA	NASHUA	N39°17.83' /W094°34.80
VPSCX	SPORTS COMPLEX	N39°03.00' /W094°29.02
VPSKR	SUGAR CREEK REFINERY	N39°07.00' /W094°27.02
VPSPK	SWOPE PARK	N39°00.47' /W094°31.93
VPTSK	TWIN STACKS	N39°09.05' /W094°38.22
VPWOF	WORLDS OF FUN	N39°10.42' /W094°29.12
	KLAMATH FALLS SECTIONAL CHART	
VPORO		N43°57.38' /W123°02.22
	LOS ANGELES HELICOPTER CHART	
VPANA		N33°44.43' /W117°50.03
VPART	MAGNOLIA	N33°51.45' /W117°58.92
VPAUT	HWY 91 & 55	N33°50.63' /W117°49.57
VPBOB		N33°59.60' /W117°21.45
VPCAR		N33°49.90' /W118°17.23
VPCNG	CONEJO GRADE US HWY 101	N34°12.54' /W118°59.61
VPCOR		N33°52.90' /W117°32.95
VPCRX		N34°01.40' /W117°44.88
VPCSU	CSU CHANNEL ISLANDS	N34°09.76' /W119°02.53
VPDOW		N33°56.47' /W118°05.80
VPELA		N34°00.98' /W118°10.35
VPETY		N33°38.70' /W117°44.12
VPFCB		N34°02.03' /W118°01.63
VPFPL	OXNARD FINANCIAL PLAZA	N34°13.71' /W119°10.39
VPGOL		N34°09.33' /W118°17.37
VPIMP		N33°55.85' /W118°16.85
VPKAT		N33°48.23' /W117°54.22
VPKEL		N34°03.92' /W117°48.40
VPLAC		N34°03.75' /W118°14.93
VPLLU		N34°03.85' /W117°17.82
VPLQM	QUEEN MARY	N33°45.17' /W118°11.37
VPLRT	SANTA ANITA RACE TRACK	N34°08.45' /W118°02.65
VPLVT	VINCENT THOMAS BRIDGE	N33°44.97' /W118°16.32
VPMDR		N33°59.27' /W118°23.97
VPNEW	NEWHALL PASS	N34°20.18' /W118°30.72
VPNUY		N34°09.63' /W118°28.18
VPPCH		N33°28.07' /W117°40.32
VPPKC		N34°03.32' /W118°12.83
VPPOR		N34°00.10' /W117°50.12
VPRRT		N33°59.37' /W118°16.83
VPSEP		N34°05.80' /W118°28.63
VPSFR		N34°17.45' /W118°28.07
VPSTC	SATICOY BRIDGE	N34°16.62' /W119°08.34
VPSTK		N34°13.97' /W118°24.60
	NC. 23 SEP 2010 to 18 NOV 2010	

LOS ANGELES SECTIONAL CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPCNG	CONEJO GRADE US HWY 101	N34°12.54'/W118°59.61'
VPCSU	CSU CHANNEL ISLANDS	N34°09.76'/W119°02.53'
VPFPL	OXNARD FINANCIAL PLAZA	N34°13.71'/W119°10.39'
VPSTC	SATICOY BRIDGE	N34°16.62'/W119°08.34'

LOS ANGELES TERMINAL AREA CHART/FLYWAY CHART

VPCNG	CONEJO GRADE US HWY 101	N34°12.54'/W118°59.61'
VPCSU	CSU CHANNEL ISLANDS	N34°09.76'/W119°02.53'
VPGTY	GETTY CENTER	N34°04.84'/W118°28.66'
VPLBP	BANNING PASS	N33°56.05'/W116°59.63'
VPLCC	CHAFFEY COLLEGE	N34°08.87'/W117°34.33'
VPLCP	CAJON PASS	N34°18.07'/W117°27.68'
VPLDL	DISNEYLAND	N33°48.72'/W117°55.13'
VPLDP	DANA POINT	N33°27.62'/W117°42.87'
VPLDS	DODGER STADIUM	N34°04.42'/W118°14.42'
VPLFX	91/605 INTERCHANGE	N33°52.38'/W118°06.08'
VPLGP	GRIFFITH PARK OBSERVATORY	N34°07.10'/W118°18.02'
VPLHF	110/405 FWYS	N33°51.42'/W118°17.10'
VPLHP	HUNTINGTON PIER	N33°39.32'/W118°00.25'
VPLKH	KING HARBOR	N33°50.75'/W118°23.88'
VPLLC	L.A. COLISEUM	N34°00.83'/W118°17.27'
VPLLM	LAKE MATHEWS	N33°50.58'/W117°26.85'
VPLMM	MAGIC MOUNTAIN	N34°26.20'/W118°36.28'
VPLMS	MILE SQUARE PARK	N33°43.40'/W117°56.77'
VPLPD	PRADO DAM	N33°53.40'/W117°38.48'
VPLPP	PACIFIC PALISADES	N34°02.13'/W118°32.15'
VPLQM	QUEEN MARY	N33°45.17'/W118°11.37'
VPLRB	ROSE BOWL	N34°09.67'/W118°10.05'
VPLRT	SANTA ANITA RACE TRACK	N34°08.45'/W118°02.65'
VPLSA	SANTA ANA CANYON	N33°52.03'/W117°42.68'
VPLSB	SANTA FE FLOOD BASIN	N34°07.72'/W117°57.30'
VPLSC	STATE COLLEGE	N33°52.97'/W117°53.13'
VPLSF	SAN FERNANDO RESERVOIR	N34°17.87'/W118°29.00'
VPLSP	SIGNAL PEAK	N33°36.33'/W117°48.63'
VPLSR	HAWTHORNE & 405 FREEWAY	N33°53.07'/W118°21.13'
VPLSS	SANTA SUSANA PASS	N34°16.00'/W118°38.43'
VPLTW	TUJUNGA WASH & FOOTHILL	N34°16.40'/W118°20.30'
VPLVT	VINCENT THOMAS BRIDGE	N33°44.97'/W118°16.32'
VPLWT	WATER TANK	N34°10.82'/W118°46.27'
VPNEW	NEWHALL PASS	N34°20.18'/W118°30.72'
VPSTC	SATICOY BRIDGE	N34°16.62'/W119°08.34'

MIAMI SECTIONAL CHART

VPACH	HOLLYWOOD BEACH	N26°00.92'/W080°06.93'
VPBOV	_____	N27°57.00'/W080°46.75'
VPCLC	_____	N26°27.07'/W082°00.88'
VPCTE	_____	N26°09.28'/W081°20.70'
VPDAD	DADE CITY	N28°22.57'/W082°11.25'
VPDUT	_____	N27°37.70'/W082°09.10'
VPDZE	_____	N27°19.00'/W080°44.17'
VPEAR	CLEARWATER BEACH	N27°58.67'/W082°49.83'
VPEDY	ANDYTOWN TOLLGATE	N26°08.78'/W080°28.00'
VPFAH	_____	N26°25.40'/W081°29.67'
VPGPE	ST PETE BEACH	N27°43.50'/W082°44.67'
VPHRO	_____	N27°05.97'/W082°12.20'
VPHUC	_____	N28°19.87'/W082°43.77'
VPIBR	_____	N27°12.47'/W081°40.22'
VPKER	LAKE PARKER	N28°04.00'/W081°56.00'
VPKOE	_____	N24°40.08'/W081°20.55'
VPLYY	_____	N24°49.07'/W080°49.17'
VPMB0	GULFSTREAM PARK	N25°58.57'/W080°08.17'
VPOBA	PUMPING STATION	N26°28.30'/W080°26.75'
VPRBI	_____	N25°50.67'/W080°55.18'
VPRNL	RANGER STATION	N25°22.92'/W080°36.58'
VPWMO	_____	N27°03.00'/W080°35.00'

392

VFR WAYPOINTS

MIAMI TERMINAL AREA CHART/FLYWAY CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPACH	HOLLYWOOD BEACH	N26°00.92' /W080°06.93
VPEDY	ANDYTOWN TOLLGATE	N26°08.78' /W080°28.00
VPMBO	GULFSTREAM PARK	N25°58.57' W080°08.17'
VPOBA	PUMPING STATION	N26°28.30' /W080°26.75
VPRBI	_____	N25°50.67' /W080°55.18
VPRNL	RANGER STATION	N25°22.92' /W080°36.58

NEW ORLEANS SECTIONAL CHART

VPGPT	_____	N30°25.95' /W089°05.62
VPLIP	PHILLIPS INLET	N30°16.23' /W085°59.25
VPMAI	_____	N30°50.02' /W084°56.63
VPMOB	_____	N30°23.00' /W088°31.72
VPRAM	_____	N30°18.95' /W089°35.88
VPRER	_____	N30°13.87' /W085°20.67
VPRIV	_____	N30°54.85' /W087°57.82
VPSAW	_____	N30°49.65' /W089°07.42
VPTHR	_____	N30°19.93' /W087°08.50

NEW YORK HELICOPTER CHART

VPJAY	_____	N40°59.00' /W073°07.00
VPLYD	_____	N40°57.37' /W073°29.59
VPROK	_____	N40°52.70' /W073°44.24

PHOENIX TERMINAL AREA CHART/FLYWAY CHART

VPALL	ALLENVILLE	N33°20.97' /W112°35.20
VPAQU	AQUEDUCT PUMPING STATION	N33°40.05' /W112°41.38
VPARM	ARROWHEAD MALL	N33°38.52' /W112°13.48
VPAWG	AHWATUKEE GOLF COURSE	N33°19.98' /W111°59.08
VPAZM	ARIZONA MILLS	N33°23.43' /W111°57.88
VPBAR	BARTLETT DAM	N33°49.10' /W111°37.92
VPCCC	COUNTRY CLUB & CANAL	N33°30.73' /W111°50.37
VPCNL	CANAL	N33°33.23' /W111°46.89
VPFRB	FIREBIRD LAKE	N33°16.35' /W111°58.10
VPFTN	FOUNTAIN HILLS	N33°36.12' /W111°42.72
VPGLX	GILA CROSSING	N33°16.55' /W112°10.08
VPGPP	GLENDALE POWER PLANT	N33°33.27' /W112°13.00
VPMAR	MARICOPA	N33°03.42' /W112°02.88
VPMHS	MESQUITE HIGH SCHOOL	N33°20.53' /W111°49.58
VPNRV	NEW RIVER	N33°55.08' /W112°08.45
VPNTT	NORTH TEST TRACK	N33°03.50' /W111°55.83
VPPIR	PIR	N33°22.52' /W112°18.90
VPQTR	QUINTERO GOLF COURSE	N33°49.53' /W112°23.58
VPRVC	RIO VERDE COMMUNITY	N33°44.37' /W111°39.62
VPSMC	SOUTH MOUNTAIN COLLEGE	N33°23.02' /W112°02.12
VPSQP	SQUAW PEAK	N33°32.83' /W112°01.27
VPSSS	SUPERSTITION SPRINGS MALL	N33°23.50' /W111°41.37
VPSTN	SANTAN MOUNTAINS	N33°09.23' /W111°40.92
VPSTT	SOUTH TEST TRACK	N32°56.25' /W111°59.67
VPZZZ	_____	N33°20.18' /W111°26.53

ST LOUIS TERMINAL AREA CHART/FLYWAY CHART

VPAGN	TV ANTENNA	N38°32.08' /W090°22.42
VPBPE	_____	N38°23.80' /W090°20.38
VPCJY	HOLIDAY SHORES	N38°55.00' /W089°56.00
VPCOJ	WINFIELD DAM	N39°00.28' /W090°41.23
VPDFA	JEFFERSON BARRACKS BRIDGE	N38°29.18' /W090°16.47
VPEAZ	BUSCH STADIUM	N38°37.43' /W090°11.55
VPEDZ	WATER TANKS	N38°45.30' /W090°34.87
VPEGR	GAS TANKS	N38°35.80' /W090°19.32
VPEOX	ST PETERS	N38°47.17' /W090°39.25

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPFAI	HOWELL ISLAND	N38°40.00' / W090°43.00'
VPFFY	_____	N38°55.37' / W090°17.30'
VPGPF	_____	N38°35.60' / W090°26.92'
VPGVI	_____	N38°32.30' / W090°27.80'
VPHRQ	CHAIN OF ROCKS BRIDGE	N38°45.88' / W090°10.42'
VPIBO	WATERLOO	N38°20.00' / W090°09.00'
VPJMU	HORSESHOE LAKE	N38°41.00' / W090°05.00'
VPKNY	PACIFIC	N38°29.00' / W090°44.00'
VPLES	ST CHARLES	N38°47.00' / W090°30.00'
VPLIW	SIX FLAGS	N38°30.67' / W090°40.47'
VPLXU	GATEWAY ARCH	N38°37.50' / W090°11.00'
VPNSY	WOOD RIVER REFINERIES	N38°50.00' / W090°05.00'
VPNZY	WENTZVILLE	N38°48.83' / W090°50.98'
VPRAZ	JERSEYVILLE	N39°07.00' / W090°20.00'
VPRMO	FOREST PARK	N38°38.00' / W090°17.00'
VPWKO	COLUMBIA	N38°27.00' / W090°12.00'
VPXXI	MILLSTADT	N38°27.50' / W090°05.68'
VPYID	MOSENTHEIN ISLAND	N38°43.00' / W090°12.25'

SALT LAKE CITY HELICOPTER CHART

VPAIR	SALTAIR	N40°44.85' / W112°11.22'
VPBEE	SOUTH INTERCHANGE	N40°38.18' / W111°54.23'
VPBRN	BARN	N40°54.28' / W112°10.15'
VPCAP	STATE CAPITOL	N40°46.67' / W111°53.25'
VPCHS	_____	N40°42.28' / W112°05.92'
VPCOP	BINGHAM COPPER MINE	N40°31.38' / W112°09.00'
VPCWY	CAUSEWAY	N41°05.37' / W112°07.17'
VPCYN	PARLEYS CANYON	N40°42.67' / W111°48.10'
VPFPC	FREE PORT CENTER	N41°05.92' / W112°02.27'
VPFPK	FRANCIS PEAK	N41°01.98' / W111°50.30'
VPGFS	GARFIELD STACK	N40°43.28' / W112°11.88'
VPHVE	SPAGHETTI BOWL	N40°43.50' / W111°54.22'
VPJRT	JORDAN RIVER TEMPLE	N40°35.02' / W111°55.58'
VPKSL	KSL ANTENNA	N40°46.80' / W112°05.80'
VPLGN	LAGOON AMUSEMENT PARK	N40°59.08' / W111°53.57'
VPMDH	MCKAY DEE HOSPITAL	N41°11.50' / W111°57.08'
VPMMT	MICROWAVE TOWERS	N40°48.50' / W111°53.37'
VPMSh	_____	N41°01.67' / W112°02.47'
VPNSL	_____	N40°50.15' / W111°54.90'
VPNTP	_____	N41°03.57' / W112°14.23'
VPOGE	GRAIN ELEVATOR	N41°13.13' / W112°00.45'
VPOPS	POWER STATION	N41°20.38' / W112°02.78'
VPPEP	STATE PRISON	N40°29.88' / W111°53.62'
VPPTT	PROMONTORY POINT	N41°12.28' / W112°25.73'
VPPTM	POINT OF THE MOUNTAIN	N40°27.42' / W111°54.83'
VPVVO	PROVO CANYON	N40°18.77' / W111°39.45'
VPRWY	_____	N40°48.48' / W112°00.33'
VPSLC	I-15/I-80 INTERCHANGE	N40°45.83' / W111°54.85'
VP TIP	SOUTH TIP	N40°50.93' / W112°10.92'
VPWBR	WEBER CANYON	N41°08.17' / W111°54.83'
VPWBT	_____	N40°38.00' / W112°03.33'

SALT LAKE CITY TERMINAL AREA CHART/FLYWAY CHART

VPAIR	SALTAIR	N40°44.85' / W112°11.22'
VPBEE	SOUTH INTERCHANGE	N40°38.18' / W111°54.23'
VPBRN	BARN	N40°54.28' / W112°10.15'
VPCAP	STATE CAPITOL	N40°46.67' / W111°53.25'
VPCHS	_____	N40°42.28' / W112°05.92'
VPCOP	BINGHAM COPPER MINE	N40°31.38' / W112°09.00'
VPCVI	CENTERVILLE INTERCHANGE	N40°55.30' / W111°53.43'
VPCWY	CAUSEWAY	N41°05.37' / W112°07.17'
VPCYN	PARLEYS CANYON	N40°42.67' / W111°48.10'
VPFPC	FREE PORT CENTER	N41°05.92' / W112°02.27'
VPFPK	FRANCIS PEAK	N41°01.98' / W111°50.30'
VPGFS	GARFIELD STACK	N40°43.28' / W112°11.88'

394			VFR WAYPOINTS		
WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION			
VPHVE	SPAGHETTI BOWL	N40°43.50' /W111°54.22			
VPJRT	JORDAN RIVER TEMPLE	N40°35.02' /W111°55.58			
VPKSL	KSL ANTENNA	N40°46.80' /W112°05.80			
VPLGN	LAGOON AMUSEMENT PARK	N40°59.08' /W111°53.57			
VPMDH	MCKAY DEE HOSPITAL	N41°11.50' /W111°57.08			
VPMMT	MICROWAVE TOWERS	N40°48.50' /W111°53.37			
VPMSH		N41°01.67' /W112°02.47			
VPNSL		N40°50.15' /W111°54.90			
VPNTP		N41°03.57' /W112°14.23			
VPOGE	GRAIN ELEVATOR	N41°13.13' /W112°00.45			
VPOPS	POWER STATION	N41°20.38' /W112°02.78			
VPPEN	STATE PRISON	N40°29.88' /W111°53.62			
VPPPT	PROMONTORY POINT	N41°12.28' /W112°25.73			
VPPTM	POINT OF THE MOUNTAIN	N40°27.42' /W111°54.83			
VPPVO	PROVO CANYON	N40°18.77' /W111°39.45			
VPRWY		N40°48.48' /W112°00.33			
VPSLC	I-15/I-80 INTERCHANGE	N40°45.83' /W111°54.85			
VPTIP	SOUTH TIP	N40°50.93' /W112°10.92			
VPUOU	U OF U EVENTS CENTER	N40°45.73' /W111°50.28			
VPWBR	WEBER CANYON	N41°08.17' /W111°54.83			
VPWBT		N40°38.00' /W112°03.33			
VPZOO	HOGLE ZOO	N40°45.00' /W111°48.95			

SAN DIEGO TERMINAL AREA CHART/FLYWAY CHART

VPLDP	DANA POINT	N33°27.62' /W117°42.87
VPLSP	SIGNAL PEAK	N33°36.33' /W117°48.63
VPOCN		N33°14.15' /W117°26.63
VPSBC	BARONA CASINO	N32°56.25' /W116°52.60
VPSBL		N33°05.18' /W117°18.55
VPSBM	BLACK MOUNTAIN	N32°58.87' /W117°07.00
VPSCF		N32°48.55' /W117°09.17
VPSCM	COWLES MOUNTAIN	N32°48.72' /W117°01.97
VPSCP	CRYSTAL PIER	N32°47.77' /W117°15.42
VPSCR		N32°39.37' /W117°07.30
VPSFB	IRON MOUNTAIN	N32°58.25' /W116°57.33
VPSLJ	LAKE JENNINGS	N32°51.53' /W116°53.28
VPSMB		N32°45.57' /W117°12.22
VPSMP		N33°22.70' /W117°36.75
VPSMS	MOUNT SOLEDAD	N32°50.40' /W117°15.10
VPSMV		N32°45.75' /W117°09.80
VPSMW	MOUNT WOODSON	N33°00.52' /W116°58.23
VP SOP	OTAY MESA PRISON	N32°35.82' /W116°55.28
VP SOT	LOWER OTAY LAKE	N32°37.73' /W116°55.38
VP SPL	SOUTH POINT LOMA	N32°39.90' /W117°14.55
VP SPP	POWER PLANT	N33°08.25' /W117°20.23
VP SQS	QUALCOMM STADIUM	N32°46.98' /W117°07.23
VP SRT	DEL MAR RACE TRACK	N32°58.58' /W117°15.95
VP SSM	SAN MIGUEL MOUNTAIN	N32°41.78' /W116°56.18
VP SSV	SAN VICENTE ISLAND	N32°55.53' /W116°55.00
VP STP	TORREY PINES GOLF COURSE	N32°54.17' /W117°14.68
VP SVA		N33°11.48' /W117°16.38

SAN FRANCISCO SECTIONAL CHART

VPKBG	KINGSBURY GRADE	N38°58.75' /W119°53.20
-------	-----------------	------------------------

SAN FRANCISCO TERMINAL AREA CHART/FLYWAY CHART

VPALT	ALTAMONT PASS	N37°44.35' /W121°35.42
VPANT	ANTIOCH BRIDGE	N38°01.45' /W121°45.02
VPBBR	BENICIA BRIDGE	N38°02.50' /W122°07.45
VPCAL	CALAVERAS RESERVOIR	N37°28.16' /W121°48.93
VPCBT	LAKE CHABOT	N37°43.68' /W122°06.94
VPCOY	COYOTE HILLS	N37°32.50' /W122°05.06
VPCQZ	CARQUINEZ BRIDGE	N38°03.66' /W122°13.52
VPCRL		N37°11.00' /W121°41.06
VPCRY	CRYSTAL SPRINGS CAUSEWAY	N37°30.56' /W122°21.10

NC. 23 SEP 2010 to 18 NOV 2010

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPCSH	CAL STATE UNIVERSITY	N37°39.52' /W122°03.52'
VPDAM	DEL VALLE DAM	N37°36.91' /W121°44.78'
VPDLR		N37°07.00' /W121°47.06'
VPDUB	DUBLIN	N37°42.06' /W121°55.36'
VPEMB	EMBASSY SUITES	N37°26.05' /W121°53.83'
VPGGF	GOLDEN GATE FIELDS	N37°53.07' /W122°18.71'
VPGIL	GILROY	N37°01.37' /W121°33.99'
VPHHH	HAMILTON	N38°03.58' /W122°30.66'
VPKGO	KGO	N37°31.58' /W122°06.10'
VPLEX	LEXINGTON RESERVOIR	N37°11.66' /W121°59.18'
VP MID	MID-SPAN SAN MATEO BRIDGE	N37°36.28' /W122°11.81'
VP MOR	MORMON TEMPLE	N37°48.46' /W122°11.95'
VP NUM	NUMMI PLANT	N37°29.56' /W121°56.58'
VPPAC		N37°38.00' /W122°32.07'
VPPRU	PRUNEYARD	N37°17.33' /W121°56.01'
VPSAR	SARATOGA	N37°15.26' /W122°02.33'
VPSLA	SLAC/LINEAR ACCELERATOR	N37°24.75' /W122°14.35'
VPOSTB	STINSON BEACH	N37°54.45' /W122°40.41'
VPSUN	SUNOL GOLF COURSE	N37°34.85' /W121°53.23'
VPUTC	U.T.C.	N37°13.93' /W121°41.35'
VPWAL	WALNUT CREEK	N37°53.78' /W122°04.30'
VPWAM		N37°30.28' /W122°10.00'
VPWFR	CEMENT PLANT	N37°30.88' /W122°12.26'

TAMPA/ORLANDO TERMINAL AREA CHART/FLYWAY CHART

VPBOV		N27°57.00' /W080°46.75'
VPCNY		N28°30.00' /W080°45.00'
VPDAD	DADE CITY	N28°22.57' /W082°11.25'
VPDFI		N29°00.17' /W081°20.85'
VPDUT		N27°37.70' /W082°09.10'
VPEAR	CLEARWATER BEACH	N27°58.67' /W082°49.83'
VPFFU		N28°57.08' /W081°00.33'
VPGPE	ST PETE BEACH	N27°43.50' /W082°44.67'
VPHUC		N28°19.87' /W082°43.77'
VPKER	LAKE PARKER	N28°04.00' /W081°56.00'
VPLEV		N28°48.00' /W080°52.00'
VPLJA		N29°00.00' /W080°51.00'

WASHINGTON SECTIONAL CHART

VSPACE		N38°07.82' /W076°48.75'
VPAXI		N38°34.57' /W076°20.38'
VPBRA		N36°13.75' /W076°08.08'
VPGCE		N36°03.90' /W076°36.42'
VPWZO		N36°00.87' /W075°40.07'

VOR RECEIVER CHECKPOINTS AND VOR TEST FACILITIES (VOT)

The use of VOR airborne and ground checkpoints is explained in Aeronautical Information Manual, Basic Flight Information and ATC Procedures.

NOTE: Under columns headed "Type of Checkpoint" & "Type of VOT Facility" G stands for ground. A/ stands for airborne followed by figures (2300) or (1000-3000) indicating the altitudes above mean sea level at which the check should be conducted. Facilities are listed in alphabetical order, in the state where the checkpoints or VOTs are located.

IOWA

VOR RECEIVER CHECKPOINTS

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Burlington (Southeast Iowa Rgnl)	111.4/BRL	A/2500	288	9.6	Over intersection of Rwy 18-36 and 12-30.
Cedar Rapids (The Eastern Iowa)	114.1/CID	G	086	3.9	On runup pad Rwy 27.
	114.1/CID	G	087	2.6	On runup pad Rwy 09.
	114.1/CID	G	092	4	On runup pad Rwy 31.
Dubuque (Dubuque Rgnl)	115.8/DBQ	G	109	0.5	Apch end Rwy 31.
Fort Dodge (Fort Dodge Rgnl)	113.5/FOD	G	118	6.1	On W edge of terminal ramp.
Iowa City (Iowa City Municipal)	116.2/IOW	A/2000	019	8	Over rotg beacon.
Newton (Newton Muni)	112.5/TNU	A/2500	145	8	Over apch end Rwy 32.
Ottumwa (Ottumwa Rgnl)	111.6/OTM	A/2500	303	7.3	Over intersection of Rwy 13-31 and 04-22.
Sheldon (Sheldon Muni)	108.6/DDI	A/2700	098	8.0	Over grain elevator in city of Sanborn.
Spencer (Spencer Muni)	110.0/SPW	G	316	0.7	On painted circle on twy AER 12.
Waterloo (Waterloo Muni)	112.2/ALO	G	304	0.8	Twy B apch end Rwy 12.

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type VOT Facility	Remarks
Davenport Muni	111.8	G	
Des Moines Intl.	109.2	G	

KANSAS

VOR RECEIVER CHECKPOINTS

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Chanute (Chanute Martin Johnson)	109.2/CNU	A/2000	058	5.6	Over center of N/S rwy.
Emporia (Emporia Muni)	112.8/EMP	A/2700	320	9.0	Over intersection of Hwy 50 and I-35.
Fort Riley (Marshall AAF)	109.4/FRI	G	032	6.8	On parking ramp adjacent to radar antenna.

VOR RECEIVER CHECK						397
Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description	
Garden City (Garden City Rgnl)	113.3/GCK	G	359	1.0	Intersection of Twys A and D.	
Goodland (Renner Fld/Goodland Muni)	115.1/GLD	G	201	1.2	On parking ramp in front of air terminal.	
Hays	110.4/HYS	A/3000	071	12.2	Over grain elevator in Gorham.	
Hill City (Hill City Muni)	113.7/HLC	A/4200	060	19.6	Over rotg bcn.	
Hutchinson (Hutchinson Rgnl)	116.8/HUT	A/3500	033	5	Over apch end Rwy 04.	
Manhattan	110.2/MHK	A/2500	054	3.9	Over water twr.	
Manhattan (Manhattan Rgnl)	110.2/MHK	G	197	0.6	0.6 NM parallel twy at B intersection.	
	110.2/MHK	G	201	0.9	Twy at Rwy 3 holdline.	
Salina (Salina Muni)	117.1/SLN	G	180	7.8	On twy north of Twy E.	
Topeka (Philip Billard Muni).....	117.8/TOP	G	215	5.6	East side of terminal ramp.	
Wichita (Wichita Mid–Continent)	113.8/ICT	A/3500	216	7.1	Over grain elevator. SW corner of Garden Plains.	

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type VOT Facility	Remarks
Topeka (Forbes Fld)	111.0	G	
Wichita (Wichita Mid-Continent)	114.0	G	

MINNESOTA

VOR RECEIVER CHECKPOINTS

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description	
Albert Lea (Albert Lea Muni).....	109.8/AEL	G	140	.5	Apch end Rwy 34.	
Alexandria (Chandler Fld)	112.8/AXN	A/2600	224	8.3	Over apch end Rwy 22.	
Baudette (Baudette Intl)	111.6/BDE	A/2000	277	13.8	Over grain elevator Williams, MN.	
Baudette (Baudette Intl)	111.6/BDE	G	310	.8	Rwy 12 runup pad.	
Detroit Lakes (Detroit Lakes–Wething Fld) ..	111.2/DTL	A/3000	132	19	Over grain elevator in Perham Mn.	
Duluth (Duluth Intl)	112.6/DLH	G	012	2.2	Intersection of Taxiways C and D near Rwy 03 thld.	
Ely (Ely Muni)	109.6/ELO	A/2500	266	17.1	Over water tower in ‘TOWER MN’.	
Fergus Falls	110.4/FFM	A/2500	126	7.5	Over underpass inter-section of 2 hwy's.	
Flying Cloud	117.7/FCM	A/2000	278	6.0	Over Chaska water tower.	
Gopher (Crystal)	117.3/GEP	A/1900	166	4.9	Over apch end Rwy 14L.	
International Falls	111.0/INL	A/2200	135	11.0	Over highway bridge over railroad track.	
International Falls (Falls Intl)	111.0/INL	G	113	0.6	On taxiway apch end Rwy 31.	
Mankato (Mankato Rgnl).....	110.8/MKT	G	317	.9	Twy A4 AER 15.	
Marshall	111.0/MML	A/2700	308	9.6	Over grain elevator at Minneota.	
Montevideo (Montevideo–Chippewa Co).....	111.6/MVE	A/2000	105	11.1	Over grain elevator straddling train tracks.	

398		VOR RECEIVER CHECK			
		Type Check Pt. Gnd.	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Facility Name (Arprt Name)	Freq/Ident	AB/ALT			
Park Rapids (Park Rapids Muni)	110.6/PKD	G	322	.6	On twy AER 13.
Rochester (Rochester Intl)	112.0/RST	A/3000	024	8.8	Over intersection of Rwys 02-20 and 13-31.
Roseau	108.8/ROX	A/2400	178	6.5	Over microwave twr.
Saint Cloud (St Cloud Rgnl)	112.1/STC	G	291	0.5	Runup area AER 13.
Worthington	110.6/OTG	A/2800	050	5.6	Over grain elevator Brewster.

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)		Freq.	Type VOT Facility	Remarks	
Minneapolis (Minneapolis St. Paul Intl/Wold Chamberlain)		111.0	G	Usable airborne 2500-4000 MSL within a 15 NM radius of VOT.	
St Paul (St Paul Downtown Holman Fld)		114.4	G		

MISSOURI

VOR RECEIVER CHECKPOINTS

		Type Check Pt. Gnd.	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Facility Name (Arprt Name)	Freq/Ident	AB/ALT			
Butler	115.9/BUM	A/1800	035	9.2	Grain elevator. VOR Checkpoint unusable.
Cape Girardeau (Cape Girardeau Rgnl)	112.9/CGI	G	112	.6	On Twy C1 N of Twy C.
Forney (Waynesville–St Robert Rgnl Forney Fld)	110.0/TBN	G	173	0.53	On N edge of Army ramp.
Kirksville	114.6/IRK	A/2500	136	7.4	Over water tank at La Plata. Checkpoint unusable.
Kirksville (Kirksville Rgnl)	114.6/IRK	G	132	3.4	On twy just W of terminal area.
Malden	111.2/MAW	A/1500	351	13.4	Over intersection of Rwy 18–36 and 04–22 of Dexter Muni Arprt.
Neosho (Joplin Muni)	117.3/EOS	A/2500	344	19	Over apch end Rwy 31.
Saint Joseph (Rosecrans Mem)	115.5/STJ	A/2500	167	10.7	Over apch end Rwy 17.
Springfield (Springfield–Branson Natl)	116.9/SGF	G	193	6.8	At E end of Twy B.
Sunshine (Lee C Fine Mem)	108.4/SHY	A/2500	353	9	Highway bridge over Osage River.

VOR RECEIVER CHECK

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type VOT Facility	Remarks
Jefferson City (Jefferson City Mem)	112.0	G	
Kansas City (Downtown)	108.6	G	
St. Louis (Lambert–St Louis Intl)	111.0	G	
Spirit of St. Louis	112.2	G	

NEBRASKA

VOR RECEIVER CHECKPOINTS

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Ainsworth	112.7/ANW	A/3600	090	13.0	Over grain elevator south edge at Long Pine.
Alliance	111.8/AIA	A/5000	310	12.1	Over grain elevator 1 NM SE of Berea.
Beatrice	110.6/BIE	A/2400	046	6.1	Over 260' AGL antenna.
Chadron (Chadron Muni)	113.4/CDR	A/4500	017	19	Over intersection of Rwy 20 and 29.
Columbus	112.2/OLU	A/2500	082	12.7	Over bridge/railroad tracks at center of Schuyler.
Columbus (Columbus Muni)	112.2/OLU	G	167	0.5	On twy at apch end Rwy 32.
Grand Island (Central Nebraska Rgnl)	112.0/GRI	G	177	1.5	On parallel twy at AER 35.
Hastings	108.8/HSI	A/3200	266	8.1	Bridge over railroad.
Hastings (Hasting Muni).....	108.8/HSI	G	330		Apch end Rwy 14.
Kearney (Kearney Muni)	111.2/EAR	G	211	0.5	South end of main ramp.
		G	319	0.5	North end of main ramp.
Lincoln (Lincoln)	116.1/LNK	G	176	4.9	On runup ramp for Rwy 35.
Norfolk	109.6/OFK	A/2600	098	10.0	Bridge over river south at Stanton.
Norfolk (Karl Stefan Mem)	109.6/OFK	G	144	0.5	On runup pad for Rwy 31.
North Platte (North Platte Rgnl Airport Lee Bird Field)	117.4/LBF	G	013	5.5	On S edge of ramp 200' N of Twy B.
O'Neill	113.9/ONL	A/3000	119	13	Over triangle in road intersection.
Omaha (Eppley Airfield)	116.3/OVR	A/2500	310	10.2	Over apch end Rwy 32L.
Scottsbluff (William B. Heilig Fld)	112.6/BFF	G	240	5.1	On NE edge ramp opposite terminal bldg & W of twy to Rwy 30.
Searle (Searle Field)	110.2/SAE	A/4800	030	7.2	Over flood-ctl spillway SE end of Lake McConaughy.
Thedford (Thomas Co)	108.6/TDD	A/4000	090		Over apch end Rwy 11.

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type VOT Facility	Remarks
Omaha (Eppley Airfield)	109.0	G	

NORTH DAKOTA

VOR RECEIVER CHECKPOINTS

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Bismarck (Bismarck Muni)	116.5/BIS	G	262	3.0	On Twy C5.
Dickinson (Dickinson—Theodore Roosevelt Rgnl)	112.9/DIK	G	182	3.7	Twy B near ramp.
Fargo (Hector Intl)	116.2/FAR	A/2000	360	9.4	Over apch end Rwy 36.
Grand Forks (Grand Forks Intl)	114.3/GFK	G	157	1.0	On twy A5.
Jamestown (Jamestown Rgnl)	114.5/JMS	G	141	0.6	On twy strip adjacent to Rwy 31.
Minot	117.1/MOT	A/2800	091	6.5	Over railroad and highway overpass.

SOUTH DAKOTA

VOR RECEIVER CHECKPOINTS

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Brookings	108.8/BKX	A/3000	072	7.5	Over grain elevator.
Mitchell (Mitchell Muni)	109.2/MHE	A/2500	238	11.0	Over intersection of highways ½ NM south o town of Mt. Vernon.
Phillip	109.2/MHE	G	194	0.5	On main ramp.
Pierre (Pierre Rgnl)	108.4/PHP	A/3300	156	4.7	Over radio twr.
Pierre (Pierre Rgnl)	112.5/PIR	G	251	5.6	On twy in front of terminal building.
Rapid City (Rapid City Rgnl)	112.3/RAP	G	320	4.5	On ramp in front of administration building adjacent to center twy.
Sioux Falls	115.0/FSD	A/2500	009	6.9	Over water twr in Baltic S.D.
Sioux Falls (Joe Foss Field)	115.0/FSD	G	143	4.3	At intersection of E/W twy and east ramp.
Watertown (Watertown Muni)	116.6/ATY	G	184	3.8	On SE corner of terminal ramp.
Winner	112.8/ISD	A/3100	204	8.6	Over blue water tank S edge of town.

PARACHUTE JUMPING AREAS

40

The following tabulation lists all reported parachute jumping sites in the area of coverage of this directory. Unless otherwise indicated, all activities are conducted during daylight hours and under VFR conditions. The busiest periods of activity are normally on weekends and holidays, but jumps can be expected at anytime during the week at the location listed. Jumps within restricted airspace are not listed.

All times are local and altitudes MSL unless otherwise specified.

Contact facility and frequency is listed at the end of the remarks, when available, in bold face type.

Refer to Federal Aviation Regulations Part 105 for required procedures relating to parachute jumping.

Organizations desiring listing of their jumping activities in this publication should contact the nearest FSS, tower or ARTCC.

Qualified parachute jumping sites will be depicted on the appropriate visual chart(s).

Note: (c) in this publication indicates that the parachute jump area is charted.

To qualify for charting, a jump area must meet the following criteria:

- (1) Been in operation for at least 1 year.
- (2) Operate year round (at least on weekends).
- (3) Log 4,000 or more jumps each year.

In addition, jump sites can be nominated by FAA Regions if special circumstances require charting.

LOCATION	DISTANCE AND RADIAL FROM NEAREST VOR/VORTAC	MAXIMUM ALTITUDE	REMARKS
IOWA			
(c) Boone Muni Arpt	37 NM; 293° Newton	15,000	6 NM radius. Continuous.
(c) Cherokee Co Rgnl	30 NM; 206° Spencer	12,500	5 NM radius. Summer continuous winter weekends and holidays
(c) Dallas Center, Husband Field	25 NM; 305° Des Moines	12,800	SR-SS 3 NM radius. Weekends and holidays
Davenport	13 NM; 258° Davenport	12,500	2 NM radius. Daily
Decorah Arpt	15 NM; 264° Waukon	7,000 AGL	Summer. Tue-Thu 1700-SS, Sat-Sun 1000-SS. Winter. 1000-SS Sat, Sun.
Fairfield Muni Arpt	16 NM; 079° Ottumwa	12,500	5 NM radius. Sat, Sun and holidays SR-SS.
Marion Arpt	14 NM; 047° Cedar Rapids	15,000 AGL	3 NM radius. Continuous.
(c) New Hampton Muni Arpt	32 NM; 359° Waterloo	15,000 AGL	1 NM radius. Daily.
(c) Northwood Muni Arpt	22 NM; 010° Mason City	11,500	5 NM radius. Apr-Oct, Sat-Sun SR-SS.
Perry Muni	33 NM; 310° Des Moines	12,500	3 NM radius. Weekends and holidays
Sioux City	13 NM; 285° Sioux City	10,000	0.5 NM radius. 0800-2000 daily
(c) Vinton Veterans Mem Airpark Arpt...	24 NM; 330° Cedar Rapids	15,000	5 NM radius. Continuous.
(c) Waterloo, Flyers Arpt	10 NM; 140° Waterloo	12,000	3 NM radius. Summer continuous winter weekends and holidays
(c) Winterset-Madison Co Arpt	17 NM; 248° Des Moines	14,000	SR-SS. 5 NM radius. SR-SS daily.
KANSAS			
Atchison, Amelia Earhart Arpt	26.2 NM; 199° St Joseph	12,500	5 NM radius. Continuous.
(c) Junction City, Ft. Riley, Marshall AAF	6.3 NM; 034° Ft. Riley	10,000	1 NM radius. Daily SR-SS
(c) Kingman, Kingman Arpt-Clyde	22 NM; 195° Hutchinson	15,000	1 NM radius. Fri, Sat, Sun and holidays, SR-SS.
Cessna Fld			
(c) Lyons-Rice Co Muni Arpt	24.7 NM; 317° Hutchinson	14,000	5 NM radius. Continuous.
(c) Usage City Muni	26 NM; 029° Emporia	12,000	2 NM radius. Sat-Sun, SR-SS. Occassional Mon-Fri, Noon to SS
(c) Rose Hill, Cook Airfield	23 NM; 110° Wichita	13,500	5 NM radius. Daily.
St Francis, Cheyenne County Muni	22.9 NM; 336° Goodland	16,000	3 NM radius Continuous.
Salina	20 NM; 247° Salina	2,700	0.3 NM radius. Occasional use
(c) Suppesville	18 NM; 200° Wichita	15,000	5 NM radius. Sat-Sun and holidays, SR-SS.
(c) Wamego Muni Arpt	19.4 NM; 075° Manhattan	11,000	5 NM radius. Continuous.
Wichita, Maize Arpt	7 NM; 070° Wichita	11,500	1 NM radius. Continuous.
(c) Wichita, Sauerman Field	14NM; 253° Wichita	13,000	5 NM radius. Continuous.

PARACHUTE JUMPING AREAS			
LOCATION	DISTANCE AND RADIAL FROM NEAREST VOR/VORTAC	MAXIMUM ALTITUDE	REMARKS
MINNESOTA			
Duluth	5 NM; 120° Duluth	10,000	Jun–Aug, Fridays 1800–2030
(c) Hutchinson Muni—Butler Fld Arpt ...	14 NM; 160° Darwin.....	13,000	5 NM radius. 0800–2359 daily.
Waseca Muni	11 NM; 223° Halfway	15,000	5 NM radius. Continuous.
Winsted Muni	18.4 NM; 109° Darwin.....	11,500	2 NM radius. Daily SR–SS.
MISSOURI			
(c) Butler Mem Arpt	7 NM; 074° Butler.....	13,000	5 NM radius. Sat–Mon 0500–2200.
(c) Charleston, Mississippi Co Arpt	25 NM; 150° Cape Girardeau	13,000	2 NM radius SR–SS weekends and holidays.
(c) Elton Hensley Mem Arpt.....	10 NM; 078° Columbia	12,000	5 NM radius. Daily 0700–1900.
(c) Kimberling Airways Arpt.....	22 NM; 323° Harrison	10,000	2 NM radius. SR–SS Mon–Sat.
(c) Lexington Muni Arpt	13 NM; 048° Napoleon	12,500 AGL	SR–SS Sat, Sun, holidays & weekday evenings.
(c) Mt Vernon Muni Arpt	31.5 NM; 235° Springfield	15,000	2 NM radius. Daily SR–SS. Springfield–Branson Natl Twr 124.95
Neosho	28.7 NM; 337° Neosho.....	10,000	
(c) Sullivan Rgnl Arpt.....	26 NM; 073° Vichy	15,000	5 NM radius. SR–SS weekends. Occasional ngt and weekdays.
NEBRASKA			
Blair Muni Arpt	23 NM; 310° Omaha	14,000	2 NM radius. Sat–Sun SR–SS. Omaha App/Dep Con 120.1
(c) Crete Muni Arpt.....	22 NM; 195° Lincoln	14,500	2 NM radius. Continuous. Lincoln App/Dep Con 124.0 (1130–0600Z‡) Mineapolis Center 128.75 (0600–1130Z‡)
Mc Cook Rgnl Arpt	2 NM; 363° Mc Cook	10,500	2 NM radius Mon–Fri 1600–SS and Sat–Sun 0800–SS.
(c) Weeping Water, Browns Arpt	27 NM; 090° Lincoln	14,000	3 NM radius. Apr–Oct, SR–30 min after SS, daily; Oct–Apr, SR–30 min after SS, weekends and Federal holidays.
NORTH DAKOTA			
(c) West Fargo Muni Arpt.	9 NM; 335° Fargo	13,500	1 NM radius. SR–SS Weekends. Occasional nights and weekdays

**INTENTIONALLY
LEFT
BLANK**

The purpose of this bulletin is to provide major changes in aeronautical information that have occurred since the last publication date of each Sectional Aeronautical, VFR Terminal Area, and Helicopter Route Charts listed. The general policy is to include only those changes to controlled airspace and special use airspace that present a hazardous condition or impose a restriction on the pilot, and major changes to airports and radio navigational facilities, thereby providing the VFR pilot with the essential data necessary to update and maintain chart currency. The data is grouped by type and then by effective date. When a new edition of the Aeronautical Chart is published, the corrective tabulation will be removed from this bulletin. Inasmuch as this Bulletin provides major changes only, pilots should consult the airport listing in this directory for all new information. Users of U.S. World Aeronautical Charts (WAC) and U.S. Gulf Coast VFR Aeronautical Charts should consult the appropriate Sectional and VFR Terminal Area Charts for revisions.

Military Training Routes (MTRs) are shown on Sectional Aeronautical Charts, VFR Terminal Area, and Helicopter Route Charts. Only the route centerline, direction of flight and the route designator are shown — route widths and altitudes are not shown. Since these routes are subject to change every 56 days and the charts are reissued generally every 6 months, routes with a change in the alignment of the charted route centerline will be listed in this Aeronautical Chart Bulletin below. You are advised to contact the nearest FSS for route dimensions and current status for those routes affecting your flight.

BILLINGS SECTIONAL

80th Edition, 26 Aug 2010

OBSTRUCTIONS

23 Sep 2010 Add obst 2638' MSL (389' AGL), 47°57'08"N, 101°16'31"W.
 Add obst 2629' MSL (389' AGL), 47°56'37"N, 101°17'17"W.
 Add obst 2336' MSL (315' AGL), 47°29'22"N, 101°28'56"W.

AIRPORTS

23 Sep 2010 No Major Changes.

NAVAIDS

23 Sep 2010 No Major Changes.

AIRSPACE

23 Sep 2010 No Major Changes.

SPECIAL USE AIRSPACE

23 Sep 2010 No Major Changes.

MILITARY TRAINING ROUTES

23 Sep 2010 No Major Changes.

MISCELLANEOUS

23 Sep 2010 No Major Changes.

CHEYENNE SECTIONAL

82nd Edition, 29 Jul 2010

OBSTRUCTIONS

29 Jul 2010 No Major Changes.
23 Sep 2010 Add obst 2890' MSL (349' AGL), 44°04'38"N, 102°26'47"W.

AIRPORTS

29 Jul 2010 No Major Changes.
23 Sep 2010 Delete ARTHUR arpt, 41°33'42"N, 101°42'41"W.
 Delete GRANBY SPORTS ultralight flight park, 40°02'55"N, 105°56'18"W.

NAVAIDS

29 Jul 2010 – 23 Sep 2010 No Major Changes.

AIRSPACE

29 Jul 2010 – 23 Sep 2010 No Major Changes.

SPECIAL USE AIRSPACE

29 Jul 2010 – 23 Sep 2010 No Major Changes.

MILITARY TRAINING ROUTES

29 Jul 2010 – 23 Sep 2010 No Major Changes.

MISCELLANEOUS

29 Jul 2010 – 23 Sep 2010 No Major Changes.

CHICAGO SECTIONAL
80th Edition, 6 May 2010**OBSTRUCTIONS**

3 Jun 2010 Add windmill farm. 1242' is highest MSL UC, 40°51'29"N, 89°06'25"W.

Add obst 1025' MSL (260' AGL) UC, 41°21'32"N, 90°34'50"W.

Add obst 1464' MSL (305' AGL), 43°34'09"N, 90°39'20"W.

Add obst 1116' MSL (260' AGL) UC, 43°53'29"N, 89°19'41"W.

Add obst 1113' MSL (320' AGL) UC, 43°57'07"N, 89°12'45"W.

Add obst 1000' MSL (288' AGL) UC, 41°06'49"N, 91°51'52"W.

Add obst 1135' MSL (255' AGL) UC, 41°58'18"N, 91°22'46"W.

Add obst 1205' MSL (310' AGL) UC, 42°37'49"N, 85°11'57"W.

29 Jul 2010 Add obst 1549' MSL (265' AGL) UC, 43°39'58"N, 91°55'52"W.

Add obst 1045' MSL (258' AGL) UC, 41°59'18"N, 89°27'38"W.

Add obst 1328' MSL (318' AGL), 41°37'36"N, 85°10'36"W.

Add obst 1045' MSL (258' AGL), 41°59'18"N, 89°27'38"W.

Add obst 1375' MSL (398' AGL) UC, 41°51'42"N, 88°55'58"W.

23 Sep 2010 Add obst 1020' MSL (360' AGL), 41°38'33"N, 86°59'53"W.

Add obst 1262' MSL (259' AGL) UC, 42°14'09"N, 91°24'07"W.

Add obst 967' MSL (258' AGL) UC, 40°55'14"N, 89°16'50"W.

Add obst 895' MSL (258' AGL) UC, 40°28'52"N, 90°18'21"W.

Add obst 788' MSL (258' AGL) UC, 40°25'33"N, 89°47'18"W.

Add obst 1632' MSL (350' AGL) UC, 44°03'08"N, 92°54'04"W.

Add obst 1056' MSL (310' AGL), 42°35'02"N, 85°31'36"W.

Add obst 1243' MSL (310' AGL), 42°36'56"N, 85°22'15"W.

AIRPORTS

3 Jun 2010 No Major Changes.

29 Jul 2010 Delete REINKE arpt, 41°53'57"N, 89°10'13"W.

Change CHICAGO O'HARE INTL ATCT freq from 390.9 to 348.0, 41°58'54"N, 87°54'24"W.

23 Sep 2010 Delete GUTWEIN arpt, 40°54'43"N, 86°52'26"W.

Delete HUNTER arpt, 40°58'52"N, 85°55'44"W.

Delete KLOPFENSTEIN arpt, 40°46'02"N, 86°55'15"W.

Delete DEYOUNG arpt, 42°58'04"N, 85°57'42"W.

Delete HARRINGTON arpt, 41°10'59"N, 86°56'01"W.

NAVAIDS

3 Jun 2010 Change WOLF LAKE VOR to WEBSTER LAKE VOR, 41°14'49"N, 85°29'51"W.

29 Jul 2010 – 23 Sep 2010 No Major Changes.

AIRSPACE

3 Jun 2010 Revise CEDAR RAPIDS, IA Class E. That airspace within a 5 mile radius of the Eastern Iowa Airport. This Class E airspace area is effective during specific dates and times established in advance by a Notice to Airmen. The effective date and time will thereafter be continuously published in the Airport/Facility Directory.

29 Jul 2010 – 23 Sep 2010 No Major Changes.

SPECIAL USE AIRSPACE

3 Jun 2010 – 23 Sep 2010 No Major Changes.

MILITARY TRAINING ROUTES

3 Jun 2010 – 23 Sep 2010 No Major Changes.

MISCELLANEOUS

3 Jun 2010 – 23 Sep 2010 No Major Changes.

GREEN BAY SECTIONAL

80th Edition, 3 Jun 2010

OBSTRUCTIONS**3 Jun 2010** No Major Changes.**29 Jul 2010** Add obst 1531' MSL (310' AGL) UC, 46°31'08"N, 92°54'34"W.

Add obst 1942' MSL (250' AGL) UC, 46°09'40"N, 88°52'40"W.

Add obst 1630' MSL (280' AGL), 46°47'26"N, 92°20'25"W.

Add obst 1590' MSL (320' AGL), 47°04'32"N, 92°45'07"W.

23 Sep 2010 Add obst 1650' MSL (280' AGL) UC, 46°23'09"N, 89°10'52"W.

Add obst 1765' MSL (349' AGL), 47°24'22"N, 91°15'00"W.

Add obst 1223' MSL (305' AGL) UC, 46°31'56"N, 92°23'39"W.

Add obst 1632' MSL (350' AGL) UC, 44°03'08"N, 92°54'04"W.

AIRPORTS**3 Jun 2010 – 29 Jul 2010** No Major Changes.**23 Sep 2010** Delete PIKE arpt, 47°39'07"N, 92°25'00"W.**NAVAIDS****3 Jun 2010** No Major Changes.**29 Jul 2010** Delete CUMBERLAND NDB, 45°30'33"N, 91°58'36"W.**23 Sep 2010** No Major Changes.**AIRSPACE****3 Jun 2010 – 23 Sep 2010** No Major Changes.**SPECIAL USE AIRSPACE****3 Jun 2010 – 23 Sep 2010** No Major Changes.**MILITARY TRAINING ROUTES****3 Jun 2010 – 23 Sep 2010** No Major Changes.**MISCELLANEOUS****3 Jun 2010 – 23 Sep 2010** No Major Changes.

KANSAS CITY SECTIONAL

84th Edition, 3 Jun 2010

OBSTRUCTIONS**3 Jun 2010** No Major Changes.**29 Jul 2010** Add obst 1620' MSL (262' AGL) UC, 36°13'15"N, 93°08'16"W.

Add obst 1067' MSL (265' AGL), 39°51'35"N, 93°12'24"W.

Add obst 1119' MSL (310' AGL), 39°59'44"N, 92°10'38"W.

Add obst 1180' MSL (260' AGL), 37°58'22"N, 91°13'24"W.

Add obst 1334' MSL (425' AGL) UC, 38°53'11"N, 95°02'12"W.

23 Sep 2010 Add obst 941' MSL (278' AGL) UC, 39°23'30"N, 89°51'46"W.

Add obst 1244' MSL (404' AGL), 38°09'08"N, 93°39'44"W.

Add obst 1382' MSL (310' AGL) UC, 39°11'25"N, 96°02'41"W.

Add obst 1279' MSL (260' AGL), 37°53'42"N, 92°05'34"W.

Add obst 1050' MSL (215' AGL), 39°48'01"N, 92°23'59"W.

AIRPORTS**3 Jun 2010** No Major Changes.**29 Jul 2010** AIR PARK SOUTH arpt closed, 37°03'34"N, 93°14'03"W.**23 Sep 2010** Delete ARRAS arpt, 39°20'17"N, 90°10'41"W.**NAVAIDS****3 Jun 2010** No Major Changes.**29 Jul 2010** Delete KENNETT NDB, 36°13'42"N, 90°02'21"W.**23 Sep 2010** Shutdown PITTSBURG NDB, 37°26'33"N, 94°43'36"W.**AIRSPACE****3 Jun 2010 – 23 Sep 2010** No Major Changes.**SPECIAL USE AIRSPACE****3 Jun 2010 – 23 Sep 2010** No Major Changes.**MILITARY TRAINING ROUTES****3 Jun 2010 – 23 Sep 2010** No Major Changes.**MISCELLANEOUS****3 Jun 2010 – 23 Sep 2010** No Major Changes.

KANSAS CITY TERMINAL AREA CHART
71st Edition, 3 Jun 2010**OBSTRUCTIONS****3 Jun 2010** No Major Changes.**29 Jul 2010** Add obst 1334' MSL (425' AGL) UC, 38°53'11"N, 95°02'12"W.**23 Sep 2010** No Major Changes.**AIRPORTS****3 Jun 2010 – 23 Sep 2010** No Major Changes.**NAVAIDS****3 Jun 2010 – 23 Sep 2010** No Major Changes.**AIRSPACE****3 Jun 2010 – 23 Sep 2010** No Major Changes.**SPECIAL USE AIRSPACE****3 Jun 2010 – 23 Sep 2010** No Major Changes.**MILITARY TRAINING ROUTES****3 Jun 2010 – 23 Sep 2010** No Major Changes.**MISCELLANEOUS****3 Jun 2010 – 23 Sep 2010** No Major Changes.

MEMPHIS SECTIONAL
85th Edition, 23 Sep 2010**OBSTRUCTIONS****23 Sep 2010** No Major Changes.**AIRPORTS****23 Sep 2010** No Major Changes.**NAVAIDS****23 Sep 2010** No Major Changes.**AIRSPACE****23 Sep 2010** No Major Changes.**SPECIAL USE AIRSPACE****23 Sep 2010** No Major Changes.**MILITARY TRAINING ROUTES****23 Sep 2010** No Major Changes.**MISCELLANEOUS****23 Sep 2010** No Major Changes.

MINNEAPOLIS-ST. PAUL TERMINAL AREA CHART
74th Edition, 1 Jul 2010**OBSTRUCTIONS****29 Jul 2010 – 23 Sep 2010** No Major Changes.**AIRPORTS****29 Jul 2010 – 23 Sep 2010** No Major Changes.**NAVAIDS****29 Jul 2010 – 23 Sep 2010** No Major Changes.**AIRSPACE****29 Jul 2010 – 23 Sep 2010** No Major Changes.**SPECIAL USE AIRSPACE****29 Jul 2010 – 23 Sep 2010** No Major Changes.**MILITARY TRAINING ROUTES****29 Jul 2010 – 23 Sep 2010** No Major Changes.**MISCELLANEOUS****29 Jul 2010 – 23 Sep 2010** No Major Changes.

OMAHA SECTIONAL
82nd Edition, 29 Jul 2010**OBSTRUCTIONS****29 Jul 2010** No Major Changes.**23 Sep 2010** Add obst 1643' MSL (220' AGL) UC, 43°13'08"N, 95°18'19"W.

Add obst 3260' MSL (498' AGL), 40°13'14"N, 100°55'00"W.

Add obst 1449' MSL (310' AGL) UC, 40°50'41"N, 95°20'54"W.

Add obst 1632' MSL (350' AGL) UC, 44°03'08"N, 92°54'04"W.

Add obst 3046' MSL (320' AGL) UC, 41°05'24"N, 99°45'37"W.

Add obst 3163' MSL (414' AGL), 41°46'47"N, 100°06'20"W.

Add obst 2039' MSL (349' AGL), 43°44'37"N, 99°06'15"W.

Add obst 2101' MSL (349' AGL), 43°54'14"N, 99°58'01"W.

AIRPORTS**29 Jul 2010 – 23 Sep 2010** No Major Changes.**NAVAIDS****29 Jul 2010 – 23 Sep 2010** No Major Changes.**AIRSPACE****29 Jul 2010 – 23 Sep 2010** No Major Changes.**SPECIAL USE AIRSPACE****29 Jul 2010 – 23 Sep 2010** No Major Changes.**MILITARY TRAINING ROUTES****29 Jul 2010 – 23 Sep 2010** No Major Changes.**MISCELLANEOUS****29 Jul 2010 – 23 Sep 2010** No Major Changes.

ST. LOUIS SECTIONAL

82nd Edition, 1 Jul 2010

OBSTRUCTIONS

29 Jul 2010 Add obst 1022' MSL (308' AGL) UC, 39°38'13"N, 87°04'56"W.
 Add obst 883' MSL (383' AGL) UC, 37°21'47"N, 87°30'56"W.
 Add obst 1386' MSL (255' AGL) UC, 37°10'17"N, 84°34'39"W.
 Add obst 990' MSL (258' AGL) UC, 39°53'39"N, 88°43'31"W.
 Add obst 848' MSL (260' AGL) UC, 38°50'53"N, 90°47'56"W.
23 Sep 2010 Add obst 1088' MSL (299' AGL), 38°48'58"N, 84°46'53"W.
 Add obst 941' MSL (278' AGL) UC, 39°23'29"N, 89°51'46"W.
 Add obst 876' MSL (258' AGL) UC, 39°32'44"N, 89°09'24"W.
 Add obst 1109' MSL (310' AGL) UC, 38°50'24"N, 85°29'50"W.
 Add obst 835' MSL (290' AGL) UC, 36°34'39"N, 87°08'32"W.
 Add obst 2115' MSL (265' AGL) UC, 36°08'04"N, 85°04'08"W.
 Add obst 972' MSL (255' AGL), 37°42'39"N, 86°31'35"W.
 Add obst 1049' MSL (255' AGL), 37°06'16"N, 85°26'55"W.

AIRPORTS

29 Jul 2010 Change CTAF 122.9 to 122.8 at CYNTHIANA-HARRISON CO arpt 38°21'58"N, 84°17'00"W.
23 Sep 2010 Delete CAREFERRE ACRES arpt, 39°10'59"N, 87°07'34"W.
 Delete ARRAS RLA arpt, 39°20'17"N, 90°10'41"W.
 Change CTAF 122.8 to 123.05 at ALEXANDRIA arpt, 40°13'57"N, 85°38'15"W.
 Change CTAF 122.8 to 122.9 at CYNTHIANA-HARRISON CO arpt, 38°21'58"N, 84°17'00"W.

NAVAIDS

29 Jul 2010 Delete DYERSBURG NDB, 35°59'42"N, 89°24'20"W.
23 Sep 2010 Delete NORTH VERNON NDB, 39°02'59"N, 85°36'03"W.
 Delete GENEVA NDB, 37°48'11"N, 87°46'14"W.

AIRSPACE

29 Jul 2010 Revise MARION, IL Class E: That airspace extending upward from 700 feet above the surface bounded by a line beginning at lat. 37°53'40" N., long. 88°48'35" W.; to lat. 37°56'25" N., long. 89°02'40" W.; to lat. 37°58'45" N., long. 89°20'25" W.; to lat. 37°47'25" N., long. 89°26'00" W.; to lat. 37°42'10" N., long. 89°24'00" W.; to lat. 37°40'46" N., long. 89°20'17" W.; to lat. 37°34'56" N., long. 89°20'25" W.; to lat. 37°34'48" N., long. 89°10'21" W.; to lat. 37°37'05" N., long. 89°10'18" W.; to lat. 37°32'50" N., long. 88°59'00" W.; to lat. 37°42'35" N., long. 88°52'15" W.; to the point of beginning.
 Revise MANILA, AR Class E: That airspace extending upward from 700 feet above the surface within a 6.4-mile radius of Manila Municipal Airport.
23 Sep 2010 No Major Changes.

SPECIAL USE AIRSPACE

29 Jul 2010 No Major Changes.
23 Sep 2010 Add SULLIVAN, IN. Restricted Area, R-3405. Beginning at 39°07'41"N, 87°22'02"W; to 39°07'41"N, 87°21'29"W; to 39°07'39"N, 87°21'29"W; to 39°07'39"N, 87°21'26"W; to 39°07'41"N, 87°21'25"W; to 39°07'41"N, 87°21'12"W; to 39°07'00"N, 87°21'08"W; to 39°07'00"N, 87°21'46"W; to 39°06'36"N, 87°21'47"W; to 39°06'36"N, 87°22'03"W; to the point of beginning. Designated altitudes. Surface up to and including 1,600 feet MSL. Times of Designation. By NOTAM 24 hours in advance. Controlling Agency. FAA, Terre Haute ATCT.
 Revise CRANE, IN. Restricted Area R-3404. That airspace within a 1 NM radius of 38°49'30"N, 86°50'08"W. Designated altitudes. Surface to and including 4,100 feet MSL. Time of designation. Sunrise to sunset, daily from May 1 through and including November 1. Other times by NOTAM 24 hours in advance. Controlling agency. FAA, Terre Haute ATCT.

MILITARY TRAINING ROUTES

29 Jul 2010 – 23 Sep 2010 No Major Changes.

MISCELLANEOUS

29 Jul 2010 – 23 Sep 2010 No Major Changes.

ST. LOUIS TERMINAL AREA CHART
74th Edition, 1 Jul 2010**OBSTRUCTIONS****29 Jul 2010** Add obst 848' MSL (260' AGL) UC, 38°50'53"N, 90°47'56"W.**23 Sep 2010** No Major Changes.**AIRPORTS****29 Jul 2010 – 23 Sep 2010** No Major Changes.**NAVAIDS****29 Jul 2010 – 23 Sep 2010** No Major Changes.**AIRSPACE****29 Jul 2010 – 23 Sep 2010** No Major Changes.**SPECIAL USE AIRSPACE****29 Jul 2010 – 23 Sep 2010** No Major Changes.**MILITARY TRAINING ROUTES****29 Jul 2010 – 23 Sep 2010** No Major Changes.**MISCELLANEOUS****29 Jul 2010 – 23 Sep 2010** No Major Changes.

TWIN CITIES SECTIONAL
80th Edition, 1 Jul 2010**OBSTRUCTIONS****29 Jul 2010** Add obst 1765' MSL (420' AGL), 45°57'52"N, 95°03'42"W.

Add obst 1709' MSL (320' AGL), 46°18'32"N, 95°30'00"W.

Add obst 1682' MSL (320' AGL), 47°26'32"N, 93°50'09"W.

Add obst 1693' MSL (320' AGL), 47°03'17"N, 94°26'03"W.

Add obst 1789' MSL (320' AGL), 46°56'58"N, 94°50'44"W.

Add obst 1590' MSL (320' AGL), 47°04'32"N, 92°45'07"W.

Add obst 1658' MSL (320' AGL), 46°24'12"N, 95°32'24"W.

Add windmill farm. 1910' is highest MSL, 47°19'09"N, 97°55'56"W.

23 Sep 2010 Add obst 1458' MSL (265' AGL), 45°44'03"N, 93°56'21"W.

Add obst 1547' MSL (325' AGL) UC, 46°04'28"N, 94°28'29"W.

Add obst 1418' MSL (350' AGL) UC, 45°34'32"N, 93°55'25"W.

Add obst 1840' MSL (350' AGL) UC, 46°55'20"N, 93°55'18"W.

Add obst 1389' MSL (350' AGL) UC, 44°49'58"N, 94°16'51"W.

Add obst 1578' MSL (300' AGL) UC, 46°59'58"N, 93°02'38"W.

Add obst 1805' MSL (305' AGL) UC, 46°56'11"N, 95°13'26"W.

Add obst 1668' MSL (250' AGL) UC, 46°15'20"N, 95°04'21"W.

Add obst 1531' MSL (255' AGL) UC, 45°20'30"N, 95°05'09"W.

Add obst 2118' MSL (420' AGL) UC, 47°10'06"N, 95°27'16"W.

AIRPORTS**29 Jul 2010 – 23 Sep 2010** No Major Changes.**NAVAIDS****29 Jul 2010 – 23 Sep 2010** No Major Changes.**AIRSPACE****29 Jul 2010** No Major Changes.**23 Sep 2010** Add PAYNESVILLE, MN Class E: That airspace extending upward from 700 feet above the surface within a 7.2-mile radius of Paynesville Municipal Airport.**SPECIAL USE AIRSPACE****29 Jul 2010 – 23 Sep 2010** No Major Changes.**MILITARY TRAINING ROUTES****29 Jul 2010 – 23 Sep 2010** No Major Changes.**MISCELLANEOUS****29 Jul 2010 – 23 Sep 2010** No Major Changes.

WICHITA SECTIONAL
85th Edition, 29 Jul 2010

OBSTRUCTIONS

29 Jul 2010 No Major Changes.

23 Sep 2010 Add obst 3260'MSL (498'AGL)UC, 40°13'14"N, 100°55'00"W.

AIRPORTS

29 Jul 2010 – 23 Sep 2010 No Major Changes.

NAVAIDS

29 Jul 2010 – 23 Sep 2010 No Major Changes.

AIRSPACE

29 Jul 2010 No Major Changes.

23 Sep 2010 Add SYRACUSE, KS Class E: That airspace extending upward from 700 feet above the surface within a 7.3-mile radius of Syracuse-Hamilton County Municipal Airport.

SPECIAL USE AIRSPACE

29 Jul 2010 – 23 Sep 2010 No Major Changes.

MILITARY TRAINING ROUTES

29 Jul 2010 – 23 Sep 2010 No Major Changes.

MISCELLANEOUS

29 Jul 2010 – 23 Sep 2010 No Major Changes.

SUPPLEMENTAL COMMUNICATION REFERENCE

Contained within this tabulation, and listed alphabetically by airport name, are all private-use airports charted on the U.S. IFR Enroute Low and High Altitude charts in the United States, having terminal approach and departure control facilities. Additionally, listed by country, are all Canadian and Mexican airports that appear on the U.S. IFR Enroute charts with approach and departure control services. All frequencies transmit and receive unless otherwise noted. Radials defining sectors are outbound from the facility.

UNITED STATES

FACILITY NAME	CHART & PANEL
Frankfort, IL (LL40) Chicago App/Dep Con 133.1 285.6	L-28H
Glasgow Industrial, MT (Ø7MT) Salt Lake Center App/Dep Con 126.85 305.2	H-1E, 2F, L-13D
USAF Academy Bullseye Aux Airstrip, CO (CØ9Ø) ASOS 118.325	L-10F
West Kentucky Airpark, KY (5KY3) Memphis Center App/Dep Con 133.65 292.15	L-16I
William P Gwinn, FL (Ø6FA) Gwinn Tower 120.4 279.25 (Mon-Fri 1300-2100Z‡) Gnd Con 121.65 279.25	H-8I, L-23C

CANADA

FACILITY NAME	CHART & PANEL
Abbotsford, BC (CYXX) ATIS 119.8 (1500-0700Z‡) Victoria Trml App/Dep Con 132.7 (Avbl on ground) 290.8 Tower 119.4 (Inner) 121.0 (Outer) 295.0 (1500-0700Z‡) Gnd Con 121.8 MF 119.4 295.0 (Ø700-1500Z‡) (Shape irregular to 4500')	H-1B, L-12F
Amos/Magny, QC (CYEY) Montreal Center App/Dep Con 125.9	H-11B
Atikokan Muni, ON (CYIB) MF 122.3 (5 NM to 4500' No ground station)	L-14I
Barrie-Orillia (Lake Simcoe Rgnl), ON (CYLS) AWOS 122.55 (Pvt) Toronto Center App/Dep Con 124.025	H-11B, L-31D
Bar River, ON (CPF2) Toronto Center App/Dep Con 132.65	L-31C
Bathurst, NB (CZBF) Moncton Center App/Dep Con 134.25	L-32J
Boundary Bay, BC (CZBB) ATIS 125.5 (1500-0700Z‡) Vancouver App/Dep Con 132.3 363.8 Tower 118.1 (Inner) 127.6 (Outer) (1500-0700Z‡) Gnd Con 124.3 MF 118.1 (Ø700-1500Z‡ to 2000'. Vancouver Trml 125.2 above 2000'. Shape irregular to 2500').	H-1B, L-1E
Brampton, ON (CNC3) Toronto Trml App/Dep Con 119.3 253.1	L-31D
Brandon Muni, MB (CYBR) Winnipeg Center App/Dep Con 132.25 285.4 MF 122.1 (5 NM to 4000')	H-2H
Brantford, ON (CYFD) Toronto Trml App/Dep Con 128.27	L-31D
Brockville-Thousand Islands Rgnl Tackaberry, ON (CNL3) Montreal Center App/Dep Con 134.675	L-32G
Bromont, QC (CZBM) Montreal Center App/Dep Con 132.35 MF 122.15 (5 NM to 3400')	L-32G
Burlington Airpark, ON (CZBA) Toronto Center App/Dep Con 119.3 253.1	L-31D
Castlegar/West Kootenay Rgnl, BC (CYCG) Vancouver Center App/Dep Con 134.2 227.3 MF 122.1 (5 NM to 6500')	H-1C
Centralia/James T. Fld Muni, ON (CYCE) Toronto Center App/Dep Con 135.30	H-10G, 11B, L-31D
Charlottetown, PE (CYYG) Moncton Center App/Dep Con 135.65 384.8 MF 118.0 (5 NM to 3200')	H-11E, L-32J
Chatham-Kent, ON (CNZ3) Cleveland Center App/Dep Con 132.25	H-10G, L-30G

FACILITY NAME	CHART & PANEL
Collingwood, ON (CNY3) Toronto Center App/Dep Con 124.02	H-11B, L-31D
Cornwall Rgnl, ON (CYCC) Boston Center App/Dep Con 135.25 377.1	L-32G
Cranbrook/Canadian Rockies Intl, BC (CYXC) Vancouver Center App/Dep Con 133.6 MF 122.3 (5 NM to 6100')	H-1C
Debert, NS (CCQ3) Halifax Trml App/Dep Con 119.2	H-11E, L-32J
Digby, NS (CYID) Moncton Center App/Dep Con 123.9	L-32J
Downsview, ON (CYZD) Toronto Center App/Dep Con 133.4 MF 126.2 (1300-2300Z†, 3 NM to 1700')	H-11B, L-31E
Drummondville, QC (CSC3) Montreal Center App/Dep Con 132.35	L-32H
Earlton (Timiskaming Rgnl), ON (CYXR) MF 122.0 (5 NM to 3800') AWOS 128.6	H-11B
Elliot Lake Muni, ON (CYEL) Toronto Center App/Dep Con 135.4	L-31C
Fort Frances Muni, ON (CYAG) Minneapolis Center App/Dep Con 120.9	L-14H
Fredericton Intl, NB (CYFC) ATIS 127.55 (1045-0245Z†, OT AWOS) Moncton Center App/Dep Con 124.3 135.5 270.8 Tower 119.0 (1045-0245Z†) Gnd Con 121.7 (1045-0245Z†) MF 119.0 (0245-1045Z†, 5 NM to 3500')	H-11E, L-32I
Goderich, ON (CYGD) Toronto Center App/Dep 135.3 266.3	H-11B, L-31D
Greenwood, NS (CYZX) ATIS 128.85 244.3 (1100-0000Z†) App/Dep Con 120.6 335.9 Tower 119.5 126.2 236.6 324.3 Gnd Con 133.75 289.4 Clnc Del 128.025 283.9	H-11E, L-32J
Grimsby Air Park, ON (CNZ8) Toronto Trml App/Dep Con 128.27 268.75 Tower 125.0 308.475	L-31E
Halifax/Shearwater, NS (CYAW) ATIS 129.175 (Ltd hrs) App/Dep Con 119.2 MF Shearwater Advisory 119.0 126.2 340.2 360.2 (Ltd hrs) Gnd Con 121.7 250.1	H-11E, L-32J
Halifax/Stanfield Intl, NS (CYHZ) ATIS 121.0 Moncton Center App/Dep Con 118.7 119.2 128.55 135.3 363.8 Tower 118.4 236.6 Gnd Con 121.9 275.8 Clnc Del 123.95 Apron Advisory 122.125	H-11E, L-32J
Hamilton, ON (CYHM) ATIS 128.1 Toronto Trml App/Dep Con 128.27 268.75 Tower 119.7 125.0 Gnd Con 121.6	H-10H, 11B, L-11B
Kingston, ON (CYGK) Montreal Center App/Dep Con 135.05 398.4 (0400-1115Z†) MF 122.5 (1115-0400Z† 5 NM to 3300')	H-11C, L-31E, 32F
Kitchener/Waterloo, ON (CYKF) ATIS 125.1 (1200-0400Z†) Toronto Trml App/Dep Con 128.275 Waterloo Tower 126.0 118.55 (1200-0400Z†) Gnd Con 121.8 MF 126.0 (0400-1200Z† 5 NM to 4000')	H-11B, L-31D
Lachute, QC (CSE4) Montreal Center App Con 124.65 132.85 268.3 Montreal Center Dep Con 132.85 268.3	L-32G
La Tuque, QC (CYLQ) Montreal Center App/Dep Con 134.5	H-11C
Langley, BC (CYNJ) ATIS 124.5 (1630-0230Z, DT 1530-0330Z) Victoria Trml App/Dep Con 132.7 290.8 Tower 119.0 (1630-0230Z, DT 1530-0330Z) Gnd Con 121.9 MF 119.0 (0230-1630Z, DT 0330-1530Z 3 NM to 1900')	L-1E

FACILITY NAME	CHART & PANEL
Leamington, ON (CLM2) Cleveland Center App/Dep Con 132.45	L-30F
Lethbridge, AB (CYQL) ATIS 124.4 (1300-0545Z‡) Edmonton Center App/Dep Con 132.75 265.2 MF 121.0 (5 NM to 6000')	H-1D
Lindsay, ON (CNF4) Toronto Center App/Dep 134.25	L-31E, L-32F
Liverpool/South Shore Rgnl, NS (CYAU) Moncton Center App/Dep Con 123.9	L-32J
London, ON (CYXU) ATIS 127.8 (1120-0345Z‡) Toronto Center App/Dep 135.3 135.625 Tower 119.4 125.65 (1120-0345Z‡) Gnd Con 121.9 MF 119.4 (0345-1120Z‡ 5 NM to 3000')	H-10G, 11B, L-30G, 31D
Manitowaning/Manitoulin East Muni, ON (CYEM) Toronto Center App/Dep 135.4 260.9	L-31C
Maniwaki, QC (CYMW) Montreal Center App/Dep Con 126.57	L-32G
Mascouche, QC (CSK3) MF 122.35 (5 NM to 2500'. No gnd station. Excluding the portion S of the N shore of Riviere des Milles-Iles and 1 NM around Lac Agile Mascouche arpt.)	L-32G
Medicine Hat, AB (CYXH) AWOS 124.875 (0345-1245Z‡) MF 122.2 (1245-0345Z‡ 5 NM to 5400')	H-1D
Midland/Huronía, ON (CYEE) Toronto Center App/Dep 124.025	L-31D
Miramichi, NB (CYCH) Moncton Center App/Dep Con 123.7	H-11E, L-32J
Moncton/Greater Moncton Intl, NB (CYQM) ATIS 128.65 App/Dep 124.4 Tower 120.8 236.6 Gnd Con 121.8 275.8 Apron Advisory 122.075	H-11E, L-32J
Mont-Laurier, QC (CSD4) Montreal Center App/Dep Con 126.57	L-32G
Montreal Intl (Mirabel), QC (CYMX) ATIS 125.7 Montreal Center App Con 124.65 132.85 268.3 Montreal Dep Con 132.85 268.3 MF 119.1 (7 NM shape irregular to 2000') VFR Advisory 134.15	H-11C, 12K, L-32G
Montreal/Pierre Elliott Trudeau Intl, QC (CYUL) ATIS 133.7 Montreal Trml App Con 118.9 124.65 126.9 132.85 268.3 Tower 119.9 267.1 Gnd Con 121.9 275.8 Clnc Del 125.6 Apron 122.075 Montreal Trml Dep Con 118.9 (SE-S-SW) 124.65 (W-NW-NE) 268.3 VFR Advisory 134.15	H-11C, 12K, L-32G
Montreal/St-Hubert, QC (CYHU) ATIS 124.9 (Apr-Oct 1045-0500Z‡, Nov-Mar 1045-0400Z) AWOS 124.9 Montreal Center App/Dep Con 125.15 268.3 St. Hubert Tower 118.4 (Apr-Oct 1045-0500Z‡, Nov-Mar 1045-0400Z) Gnd Con 126.4 MF 118.4 (Apr-Oct 0500-1045Z‡, Nov-Mar 0400-1045Z 5 NM shape irregular to 2500') VFR Advisory 134.15	H-11C, L-32G
Muskoka, ON (CYQA) AWOS 124.575 Timmins Radio App/Dep Con 122.3 MF 122.3 (5 NM to 3900')	H-11B, L-31D
Nanaimo, BC (CYCD) Victoria Trml App/Dep 120.8 133.95 252.3 MF 122.1 291.8 1330-0530Z‡ (5 NM to 2500')	H-1B, L-1E
North Bay, ON (CYYB) ATIS 124.9 (1130-0330Z‡) Toronto Center App/Dep 121.225 127.25 MF 118.3 (1130-0330Z‡ 7 NM to 5000')	H-11B, L31D
Oshawa, ON (CYOO) ATIS 125.675 (1130-0330Z‡) Toronto Trml App/Dep Con 133.4 Tower 120.1 (1130-0330Z‡) Gnd Con 118.4 MF 120.1 (0330-1130Z‡ 5 NM to 3000')	L-31E

FACILITY NAME	CHART & PANEL
Ottawa/Carp, ON (CYRP) ATIS 121.15 Ottawa Trml App/Dep Con 128.175	L-31E, 32F
Ottawa/Gatineau, QC (CYND) Ottawa Trml App/Dep Con 127.7 128.175 MF 122.3 (5 NM shape irregular to 2500') VFR Advisory Ottawa Trml 127.7	H-11C, L-32G
Ottawa/MacDonald-Cartier Intl, ON (CYOW) ATIS 121.15 Ottawa App Con 135.15 Tower 118.8 (VFR South) 120.1 (VFR North) 118.8 341.3 Gnd Con 121.9 Cinc Del 119.4 Ottawa Dep Con 128.175	L-11C
Owen Sound/Billy Bishop Rgnl, ON (CYOS) Toronto Center App/Dep 132.575 290.6	L-31D
Pelee Island, ON (CYPT) Cleveland Center App/Dep Con 126.35 360.0	L-30F
Pembroke, ON (CYTA) Montreal Center App/Dep Con 135.2 Petawawa Advisory 126.4 250.1 (Mon-Fri 1300-2130Z†, OT PPR)	H-11C, L-31E, 32F
Penticton, BC (CYYF) Vancouver Center App/Dep Con 133.5 351.3 MF 118.5 (5 NM to 4100')	H-1B
Peterborough, ON (CYPQ) AWOS 126.925 Toronto Center App/Dep 134.25	H-11B, L-31E, 32F
Pincher Creek, AB (CZPC) Edmonton Center App/Dep Con 132.75 265.2	H-1D
Pitt Meadows, BC (CYPK) ATIS 125.0 (1500-0700Z†) Vancouver Center App Con 128.6 352.7 (Outer) Pitt Tower 126.3 (1500-0700Z†) Gnd Con 123.8 Vancouver Center Dep Con 132.3 363.8 (South) MF 126.3 (0700-1500Z†) (3NM to 2500')	L-1E
Quebec/Jean Lesage Intl, QC (CYQB) ATIS 134.6 Montreal Center App/Dep Con 124.0 127.85 135.025 270.9 322.8 Tower 118.65 236.6 Gnd Con 121.9 250.0	H-11D, L-32H
Riviere Du Loup, QC (CYRI) AWOS 122.025 (Pvt) Montreal Center App/Dep Con 125.1 299.6	H-11D
Rouyn Noranda, QC (CYUY) Montreal Center App/Dep Con 125.9 MF 122.2 (5 NM to 4000')	H-11B
Saint John, NB (CYSJ) Moncton Center App/Dep Con 124.3 135.5 270.8 MF 118.5 (5 NM to 3400')	H-11E, L-32J
Sarnia (Chris Hadfield), ON (CYZR) AWOS 119.125 Toronto Center App/Dep Con 134.375	H-10G, 11B, L-30F
Sault Ste Marie, ON (CYAM) ATIS 133.05 (1300-0100Z†) Toronto Center App/Dep Con 132.65 344.5 Tower 118.8 (1300-0100Z†) Gnd Con 121.7 (1300-0100Z†) MF 118.8 (0100-1300Z† 5 NM irregular shape to 3000')	H-2K, L-31B
Sherbrooke, QC (CYAM) AWOS 126.25 Montreal Center App/Dep Con 132.55 MF 123.5 (Ltd hrs 5 NM to 3800')	H-11D, L-32H
South Renfrew Muni, ON (CNP3) Montreal Center App/Dep 124.275	L-31E, 32F
Southport, MB (CYPG) ATIS 120.85 (Mon-Fri 1400-2300Z† except holidays) Tower 126.2 384.2 (Mon-Fri 1400-2300Z† except holidays) Gnd Con 121.7 275.8	H-2H

FACILITY NAME	CHART & PANEL
Springwater Barrie Airpark, ON (CNA3) Toronto Center App/Dep Con 124.025	L-31D
St. Catharines/Niagara District, ON (CYSN) ATIS 128.525 (1215-0200Z‡) Toronto Trml App/Dep Con 133.4 253.1 MF 123.25 (1215-0200Z‡ 5 NM to 3300')	H-10H, 11B, L-31E
St. Frederic, QC (CSZ4) Montreal Center App/Dep Con 135.025 270.9	L-32H
St. Georges, QC (CYSG) Montreal Center App/Dep Con 132.35 MF 122.15 (5 NM 3900' ASL)	H-32H, L-11D
St. Jean, QC (CYJN) Montreal Center App/Dep Con 125.15 268.3 Tower 118.2 (Apr-Oct 1230-0230Z‡ Nov-Mar 1300-0200Z‡) Gnd Con 121.7	L-32G
Sudbury, ON (CYSB) ATIS 127.4 Toronto Center App/Dep Con 135.5 MF 125.5 (7 NM to 4000')	H-31B, 10G, L-31D
Summerside, PE (CYSU) AWOS 122.55 (Pvt) Moncton Center App/Dep Con 124.4 384.8	H-11E, L-32J
Thunder Bay, ON (CYQT) ATIS 128.8 (1100-0400Z‡) Winnipeg Center App/Dep Con 132.125 Tower 118.1 (1100-0400Z‡) Gnd Con 121.9 (1100-0400Z‡) App/Dep 119.2 MF 118.1 (0400-1100Z‡ 5 NM to 4000')	H-2J, L-14J
Timmins/Victor M. Power, ON (CYTS) ATIS 124.95 (1000-0500Z‡) Toronto Center App/Dep Con 128.3 MF 122.3 (5 NM to 4000')	H-11B
Toronto/Buttonville Muni, ON (CYKZ) ATIS 127.1 (1200-0400Z‡) Toronto Trml App/Dep Con 133.4 Tower 124.8 119.9 (1200-0400Z‡) Gnd Con 121.8 (1200-0400Z‡) MF 124.8 (0400-1200Z‡ No gnd station. 5 NM shape irregular to below 2500')	L-31E
Toronto/Billy Bishop Toronto City Airport, ON (CYYZ) ATIS 133.6 (1130-0400Z‡) App/Dep Con 133.4 Tower 118.2 119.2 (1130-0400Z‡) Gnd Con 121.7	L-31E
Toronto/Lester B Pearson Intl, ON (CYYZ) ATIS 120.825 App Con 124.475 125.4 132.8 Dep Con 127.575 128.8 Tower 118.35 118.7 Gnd Con 119.1 121.65 121.9 Clnc Del 121.3 (1200-0400Z‡)	H-11B, L-31D
Trenton, ON (CYTR) ATIS 135.45 257.7 App/Dep Con 128.4 324.3 Tower 128.7 236.6 Gnd Con 121.9 275.8 Clnc Del 124.35 286.4	H-11C, L-31E, 32F
Trenton/Mountain View, ON (CPZ3) Trenton Mil Advisory 268.0	H-11C, L-31E, 32F
Trois-Rivieres, QC (CYRQ) Montreal Center App/Dep Con 128.225 229.2 MF 123.0 (5 NM to 3200')	H-11C, L-32H
Val-D'or, QC (CYVO) Montreal Center App/Dep Con 125.9 308.3 MF 118.5 (1030-0325Z‡ 5 NM to 4000')	H-11B
Vancouver Intl, BC (CYVR) ATIS 124.6 124.75 App Con 128.6 128.17 352.7 (Outer) 133.1 134.225 352.7 (Inner) Dep Con 126.125 (north) 132.3 (south) 363.8 Tower 118.7 (south) 119.55 (north) VFR 124.0 125.65 226.5 236.6 Gnd Con 121.7 (south) 127.15 (north) 275.8 Clnc Del 121.4	H-1B, L-1E

FACILITY NAME	CHART & PANEL
Victoria Intl, BC (CYYJ) ATIS 118.8 (1400-0800Z‡) App Con 125.95 Dep Con 133.85 Tower 119.1 (Outer) 119.7 (Inner) 239.6 Gnd Con 121.9 361.4 (1400-0800Z‡ OT ctc Kamloops 119.7) Cinc Del 126.4 (1400-0800Z‡)	H-1B, L-1E
Victoriaville, QC (CSR3) Montreal Center App Con 132.35	L-32H
Waterville/Kings Co Muni, NS (CCW3) Greenwood Trml App/Dep Con 120.6 335.9 Greenwood Tower 119.5 324.3	L-32J
Warton, ON (CYVW) Toronto Center App/Dep Con 132.575 MF 122.2 (5 NM to 3700')	H-11B, L-31D
Windsor, ON (CYQG) ATIS 134.5 (1130-0330Z‡) Detroit App/Dep Con 126.85 127.5 134.3 348.3 363.2 Tower 124.7 (1130-0330Z‡) Gnd Con 121.7 (1130-0330Z‡) MF 124.7 (0330-1130Z‡ 6 NM irregular shape to below 3000') VFR Advisory Detroit App Con 134.3	H-10G, L-8J
Yarmouth, NS (CYQI) Moncton Center App/Dep Con 123.9 368.5 MF 123.0 (5 NM to 3100')	H-11E, L-32I

MEXICO

FACILITY NAME	CHART & PANEL
Abraham Gonzalez Intl (MMCS) Juarez App Con 119.9 Juarez Tower 118.9	H-4K, L-6F
Del Norte Intl (MMAN) ATIS 127.55 (1300-0300Z‡) Monterrey App 119.75 120.4 Tower 118.6	H-7B, L-20G
Durango Intl (MMDO) ATIS 132.1 Tower 118.1 Durango Info 122.3	H-7A
General Abelardo L Rodriguez Intl (MMTJ) ATIS 127.9 Tijuana App Con 119.5 120.3 Tijuana Tower 118.1 Tijuana Cinc Del 122.35 Tijuana Info 132.1	H-4H, L-4H
General Lucio Blanco Intl (MMRX) Reynosa App Con 118.8 Reynosa Tower 118.8	H-7B, L-20H
General Mariano Escobedo Intl (MMMY) ATIS 127.7 Monterrey App Con 119.75 120.4 Monterrey Tower 118.1 Gnd Con 121.9	H-7B, L-20G
General R Fierro Villalobos Intl (MMCU) ATIS 127.9 Chihuahua App Con 121.0 Chihuahua Tower 118.4	L-6I
General Rodolfo Sanchez Taboada Intl (MMML) ATIS 127.6 Mexicali App Con 118.2 Mexicali Tower 118.2 Mexicali Info 123.9 122.3	H-4H, L-4J, 5A
General Servando Canales Intl (MMMA) Matamoros App Con 118.0 Matamoros Tower 118.0	H-7C, L-21A
Plan De Guadalupe Intl (MMIO) Saltillo App Con 127.4 Saltillo Tower 118.4	H-7B
Quetzalcoatl Intl/Nuevo Laredo Intl (MMNL) Nuevo Laredo App Con 118.3 Nuevo Laredo Tower 118.3	H-7B, L-20G
Torreón Intl (MMTC) App Con 119.6 Tower 118.5	H-7A




In support of the Federal Aviation Administration's Runway Incursion Program, selected towered airport diagrams have been published in the Airport Diagram section of the A/FD. Diagrams will be listed alphabetically by associated city and airport name. Airport diagrams, depicting runway and taxiway configurations, will assist both VFR and IFR pilots in ground taxi operations. The airport diagrams in this publication are the same as those published in the U.S. Terminal Procedures Publications. For additional airport diagram legend information see the U.S. Terminal Procedures Publication.





NOTE: Some text data published under the individual airport in the front portion of the A/FD may be more current than the data published on the Airport Diagrams. The airport diagrams are updated only when significant changes occur.

GENERAL INFORMATION

PILOT CONTROLLED AIRPORT LIGHTING SYSTEMS




Available pilot controlled lighting (PCL) systems are indicated as follows:

1. Approach lighting systems that bear a system identification are symbolized using negative symbology, e.g., , , .
2. Approach lighting systems that do not bear a system identification are indicated with a negative "0" beside the name.

A star (★) indicates non-standard PCL, consult the individual airport in the front portion of the A/FD, e.g., ★. To activate lights use frequency indicated in the communication section of the chart with a  or the appropriate lighting system identification e.g., UNICOM 122.8 , , .

<u>KEY MIKE</u>	<u>FUNCTION</u>
7 times within 5 seconds	Highest intensity available
5 times within 5 seconds	Medium or lower intensity (Lower REIL or REIL-off)
3 times within 5 seconds	Lowest intensity available (Lower REIL or REIL-off)

CHART CURRENCY INFORMATION

FAA procedure amendment number  Amdt 11A 99365  Date of latest change
 Orig 00365

The Chart Date identifies the Julian date the chart was added to the volume or last revised for any reason. The first two digits indicate the year, the last three digits indicate the day of the year (001 to 365/6) in which the latest addition or change was first published.

The Procedure Amendment Number precedes the Chart Date, and changes any time instrument information (e.g., DH, MDA, approach routing, etc.) changes. Procedure changes also cause the Chart Date to change.


MISCELLANEOUS

- ★ Indicates a non-continuously operating facility, see the individual airport in the front portion of the A/FD.
- # Indicates control tower temporarily closed UFN.


INSTRUMENT APPROACH PROCEDURES (CHARTS)

AIRPORT DIAGRAM/AIRPORT SKETCH

Runways

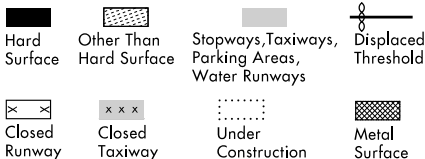


ARRESTING GEAR: Specific arresting gear systems; e.g., BAK12, MA-1A etc., shown on airport diagrams, not applicable to Civil Pilots. Military Pilots refer to appropriate DOD publications.



ARRESTING SYSTEM

REFERENCE FEATURES

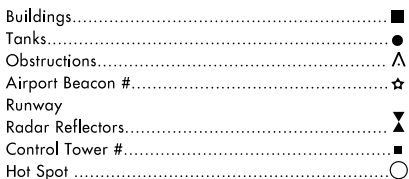

When Control Tower and Rotating Beacon are co-located, Beacon symbol will be used and further identified as TWR.

Runway length depicted is the physical length of the runway (end-to-end, including displaced thresholds if any) but excluding areas designated as stopways.

A symbol is shown to indicate runway declared distance information available, see appropriate A/FD, Alaska or Pacific Supplement for distance information.

Runway Weight Bearing Capacity/or PCN Pavement Classification Number is shown as a codified expression.

Refer to the appropriate Supplement/Directory for applicable codes e.g., RWY 14-32 PCN 80 F/D/X/U S-75, D-185, 2S-175, 2D-325

Helicopter Alighting Areas
Negative Symbols used to identify Copter Procedures landing point.....

Runway Threshold elevation.....THRE 123
Runway TDZ elevation.....TDZE 123

Runway Slope.....0.3% DOWN
(shown when runway slope is greater than or equal to 0.3%)

NOTE:
Runway Slope measured to midpoint on runways 8000 feet or longer.

U.S. Navy Optical Landing System (OLS) "OLS" location is shown because of its height of approximately 7 feet and proximity to edge of runway may create an obstruction for some types of aircraft.

Approach light symbols are shown in the Flight Information Handbook.


Airport diagram scales are variable.

True/magnetic North orientation may vary from diagram to diagram

Coordinate values are shown in 1 or 1/2 minute increments. They are further broken down into 6 second ticks, within each 1 minute increments.

Positional accuracy within ± 600 feet unless otherwise noted on the chart.

NOTE:
All new and revised airport diagrams are shown referenced to the World Geodetic System (WGS) (noted on appropriate diagram), and may not be compatible with local coordinates published in FLIP. (Foreign Only)

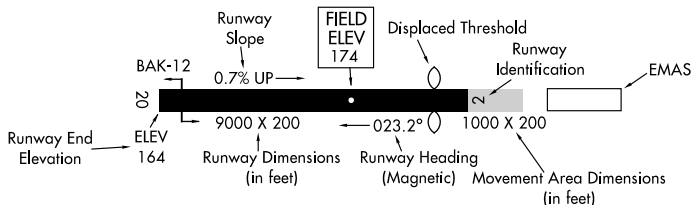

SCOPE

Airport diagrams are specifically designed to assist in the movement of ground traffic at locations with complex runway/taxiway configurations and provide information for updating Computer Based Navigation Systems (I.E., INS, GPS) aboard aircraft. Airport diagrams are not intended to be used for approach and landing or departure operations. For revisions to Airport Diagrams: Consult FAA Order 7910.4.

HOT SPOTS

An "Airport surface hot spot" is a location on an aerodrome movement area with a history or potential risk of collision or runway incursion, and where heightened attention by pilots/drivers is necessary.

A "hot spot" is a runway safety related problem area on an airport that presents increased risk during surface operations. Typically it is a complex or confusing taxiway/taxiway or taxiway/runway intersection. The area of increased risk has either a history of or potential for runway incursions or surface incidents, due to a variety of causes, such as but not limited to: airport layout, traffic flow, airport marking, signage and lighting, situational awareness, and training. Hot spots are depicted on airport diagrams as open circles or polygons designated as "HS 1", "HS 2", etc. and tabulated in the list below with a brief description of each hot spot. Hot spots will remain charted on airport diagrams until such time the increased risk has been reduced or eliminated.

CITY/AIRPORT	HOT SPOT	DESCRIPTION
IOWA		
CEDAR RAPIDS THE EASTERN IOWA (CID)	HS 1	Twy A crosses Rwy 13–31. Twy A is used frequently by vehicles and acft to transition to and from the west hangar/FBO area.
	HS 2	Intersection of Rwy 13–31 and Rwy 09–27.
	HS 3	Twy C becomes Twy A on the north side of the apch end of Rwy 27. Acft taxiing from the east hangars to Rwy 09 and Rwy 13 are required to cross Rwy 09–27.
DES MOINES DES MOINES INTS (DSM)	HS 1	Westbound tfc on Twy B must remain alert so as to not miss the right turn onto Twy D when taxiing to Rwy 13. Comply with rwy hold signs, sfc painted signs and elevated rwy guard lgts at the intersection of Twy B and Rwy 13–31.
	HS 2	Use caution and comply with the signs and markings when taxiing near this complex intersection.
	HS 3	The apch end of Rwy 5 at Twy P has limited visibility from the twr.
	HS 4	Iowa ANG complex is located north of Twy D on the northwest part of the arpt. Vehicle movement in this area is obstructed from the tower's view. Be vigilant for vehicles while taxiing in the area.
DUBUQUE DUBUQUE RGNL (DBQ)	HS 1	Use caution when taxiing to Rwy 18 or Rwy 13 via Twy A. Comply with rwy hold signs, sfc painted signs and elevated rwy guard lgts at the intersection of Twy A and Rwy 18–36.
	HS 2	Use caution exiting the ramp area on Twy D. Twy D crosses Rwy 13–31 immediately after leaving ramp area.
	HS 3	Use caution exiting the ramp area on Twy C. Twy C crosses Rwy 13–31 immediately after leaving ramp area.
FORT DODGE FORT DODGE RGNL (FOD)	HS 1	Westbound tfc on Twy B must remain alert at the intersection where Twy B splits with Twy D. Holding position markings for Rwy 06–24 and Rwy 12–30 are immediately after the twy split.
MASON CITY MASON CITY MUNI (MCW)	HS 1	Single twy leads to the apch end of Rwy 30 and Rwy 35. When departing northbound, cross check compass on rwy to verify use of correct rwy for departure. Approximately half of Rwy 12 and Rwy 18 are not mutually visible due to rising terrain and trees located between rwys. Use caution when operating on either Rwy 12 or Rwy 18 for crossing tfc. Broadcast your position and intentions on CTAF.
SIOUX CITY SIOUX GATEWAY/ COLONEL BUD DAY FIELD (SUX)	HS 1	Rwy 17–35 and Rwy 13–31 intersect at Twy B. When departing northbound, cross check compass on rwy to verify use of correct rwy for departure.
	HS 2	Twy A and Twy G are located in the movement area near the apch end of Rwy 31. Do not traverse from Twy A to Twy G or visa versa without ATC authorization.

WATERLOO			
WATERLOO RGNL (ALO)	HS 1	<p>The intersection of Twy B and Twy C outbound holding position markings for Rwy 12–30 and Rwy 18–36 are immediately after the split of Twy B and Twy C.</p> <p>Twy A crosses the apch end of Rwy 36 prior to Rwy 06. When departing northbound, cross check compass on rwy to verify use of correct rwy for departure.</p> <p>Use caution exiting the ramp area on Twy B. Twy B intersects Rwy 06–24 immediately after leaving ramp area.</p> <p>Use caution when crossing Rwy 12–30 on Twy A inbound and outbound. Twy A is used as a pass through twy to the ANG hangar and Rwy 06–24.</p>	
	HS 2		
	HS 3		
	HS 4		

KANSAS

DODGE CITY			
DODGE CITY RGNL (DDC)	HS 1	Ramp is in close proximity to rwys.	
GARDEN CITY			
GARDEN CITY RGNL (GCK)	HS 1	<p>Twy C intersects Rwy 12–30 1300' from apch end. Back taxi clearance required for full length departure on Rwy 12.</p> <p>Use caution exiting the ramp area on Twy C. Twy C crosses Rwy 17–35 immediately after leaving ramp area. Pilots must use caution when exiting the rwy on Twy C, as the non-movement area boundary is on the twy prior to the ramp.</p> <p>While taxiing southbound on Twy A to Rwy 30, left turn on Twy B required to reach approach end of Rwy 30. If pilot is not extra vigilant, it is easy for an acft to miss the turn on Twy B and cross the active rwy.</p>	
	HS 2		
	HS 3		
HUTCHINSON			
HUTCHINSON MUNI (HUT)	HS 1	<p>Twy A and Twy C intersect with multiple rwys.</p> <p>Twy B hold markings for Rwy 04 and Rwy 35 are very close. Use caution to hold short at proper hold marking.</p>	
	HS 2		
LIBERAL			
LIBERAL MID-AMERICA RGNL (LBL)	HS 1	<p>After leaving main ramp on Twy A northbound, use caution for tfc ldg Rwy 22. Rwy 22 rwy boundary marking is on Twy A prior to the left turn on Twy B. Twy B is an extension of the Rwy 22 overrun. Rwy 17 rwy boundary is on Twy A past Twy B. Use caution for close proximity apch ends of Rwy 17 and Rwy 22.</p> <p>Use caution exiting the ramp area on Twy C. Twy C intersects Rwy 17–35 immediately after leaving ramp area. Pilots must use caution when exiting the ramp and the rwy on Twy C, as Twy C is identified with blue reflectors.</p>	
	HS 2		
MANHATTAN			
MANHATTAN RGNL (MHK)	HS 1	<p>Use caution when taxiing to/from the terminal area via Twy D. Twy D is the primary entrance and exit from the main ramp and is in close proximity to Rwy 03–21.</p> <p>Use caution when taxiing northeast on Twy A to the east ramp. Do not mistake Rwy 13–31 for Twy E.</p>	
	HS 2		
OLATHE			
JOHNSON CO EXECUTIVE (OJC)	HS 1	<p>Twy C crosses the apch end of Rwy 18.</p> <p>Acft on the east side of the rwy taxiing to Rwy 36 utilizing Twy B, cross Rwy 18–36. Rwy holding position marking is not fully visible until after marking the westbound turn.</p>	
	HS 2		
OLATHE			
NEW CENTURY AIRCENTER (IXD)	HS 1	<p>Complex twy configuration at and near the apch end of Rwy 18. Intersection of Twy C and Twy B is in the Rwy Safety Area for Rwy 18–36.</p> <p>Twy A is in close proximity to U.S. Army Reserve ramp area.</p> <p>Complex intersection of Twy A and Twy F, along with Rwy 04–22 and Rwy 18–36. Additionally, acft southwest of this area may not be visible from the ATCT.</p>	
	HS 2		
	HS 3		

SALINA SALINA MUNI (SLN)	HS 1	Twy E crossing Rwy 17–35 is active with student pilot midfield departures. Note the elevated rwy guard lgts located on the east side of Rwy 17–35 at Twy E.
	HS 2	Tfc Idg Rwy 12 use caution when exiting onto Twy B. Hold line for Rwy 17–35 approaches quickly. Note the elevated rwy guard lgts located on the west side of Rwy 17–35 on Twy B.
TOPEKA FORBES FIELD (FOE)	HS 1	Southbound tfc on Twy A must remain alert so as to not miss the right turn on Twy A when taxiing to Rwy 03. Twy D continues to an intersection with Rwy 03. Twy A turns to the southwest.
	HS 2	Use caution Twy A becomes Twy E just past access to the apch end of Rwy 03. Twy A turns left, Twy E continues southwest bound to the KS ANG ramp.
	HS 3	Twy E is not visible from the ATCT. Twy E also accesses KS ANG ramp and is not maintained by the Airport Authority.
TOPEKA PHILIP BILLARD MUNI (TOP)	HS 1	Twy A and Twy D intersect inside of the Runway Safety Area for Rwy 04–22. Twy A intersects Rwy 04–22 at two different locations.
WICHITA WICHITA MID-CONTINENT (ICT)	HS 1	Twy R exits Air Carrier Gates & Ramps. Acft may enter Twy R from different directions at different angles.
	HS 2	Twy B crosses or intersects all rwys. Intersection with Rwy 14–32 can be confusing.
	HS 3	Twy K and Twy C complex on west side of the Air Carrier Ramp leads to Twy K1 intersection with Rwy 14–32 which is a common intersection departure point.

MINNESOTA

DULUTH DULUTH INTL (DLH)	HS 1	Acft/vehicular tfc on Twy E1, Twy E2 and Twy E should be alert. Signage indicates Rwy 27 APCH. Twy E is in the safety area for Rwy 09–27.
	HS 2	Apch end of Rwy 27 located at Twy A5.
	HS 3	Complex intersection. Be alert when taxiing to Rwy 21 via Twy A and Twy C.
MINNEAPOLIS CRYSTAL (MIC)	HS 1	Short distance between rwys. Manage your taxi speed.
	HS 2	Short distance between rwys. Manage your taxi speed.
	HS 3	Short distance between rwys. Manage your taxi speed.
	HS 4	Be prepared to hold short of Rwy 06R (sod) on Twy F.
	HS 5	Be prepared to hold short of Rwy 24L (sod) on Twy D.
	HS 6	Multiple vehicle/pedestrian deviations have occurred in this area due to proximity of arpt access points and hangars obscuring twr view.
	HS 7	Close proximity of Rwy 14R and Rwy 06R hold markings at Twy A and Twy E intersection.
MINNEAPOLIS FLYING CLOUD (FCM)	HS 8	Acft taxiing northeast on Twy B for Rwy 24R or Rwy 24L, tend to make a right turn onto Twy E, incurring on the active rwy.
	HS 1	Hold position marking/signs for Rwy 10L located 30' south of Twy A.
	HS 2	Hold position marking/signs for Rwy 10L located 30' south of Twy A.
	HS 3	Hold position marking/signs for Rwy 10L located 30' south of Twy A.
	HS 4	Hold position marking/signs for Rwy 10L located 30' south of Twy A.
	HS 5	Hold position marking/signs for Rwy 10L located 30' south of Twy A.
	HS 6	Hold position marking/signs for Rwy 10L located 30' south of Twy A.
	HS 7	Hold position marking/signs for Rwy 10L located 30' south of Twy A.
	HS 8	Hold position marking/signs for Rwy 10L located 30' south of Twy A.

MINNEAPOLIS

MINNEAPOLIS-ST PAUL
INTL/WOLD-CHAMBERLIAN (MSP)

HS 9	Rwy 18 apch area proximity to adjacent ramps along Twy A.
HS 10	Close proximity of parallel rwys and holding positions when crossing apch end of Rwy 28L.
HS 11	Short distance between rwy hold short lines. Be prepared to hold short of each rwy.
HS 1	Expansive pavement at the intersection of Twy A, Twy B, Twy C, Twy D, and Twy H in near proximity to Rwy 12R-30L and Rwy 04-22. Use caution for rwy crossings in this area.
HS 2	Complex twy/rwy geometry.
HS 3	Expansive pavement at the intersection of Twy C, Twy D, Twy P, and Twy Q in near proximity to Rwy 12R-30L and Rwy 04-22. Use caution for rwy crossings in this area.
HS 4	Complex geometry at Rwy 04 apch end. Rwy 04 depart check compass to verify correct rwy heading.

MISSOURI

BRANSON

BRANSON (BBG)

HS 1	Westbound tfc on Twy C must remain alert so as to not mistake Rwy 14-32 for a parallel twy. First left turn out of ramp area is Rwy 14-32.
HS 2	Use caution for acft utilizing Twy E and Twy F as a turn around after ldg on Rwy 14 or taxiing to hold while waiting to depart Rwy 32. Back taxi required on Rwy 14-32 for full length departure on Rwy 32 and frequently utilized by acft ldg Rwy 14.

CAPE GIRARDEAU

CAPE GIRARDEAU RGNL (CGI)

HS 1	Area not visible from the twr.
HS 2	Acft ldg Rwy 10 sometime mistake Rwy 02-20 as Twy D.

COLUMBIA

COLUMBIA RGNL (COU)

HS 1	Use caution approaching the intersection of Twy A and Twy B due to the close proximity of rwy holding position markings for Rwy 02-20 and Rwy 13-31.
HS 2	Acft departing Rwy 20. Taxiing on Rwy 13-31 may be authorized to reach the apch end of Rwy 20. Use caution not to confuse rwy holding position marking for Rwy 13 with the marking for Rwy 20.
HS 3	Acft departing Rwy 20. Rwy holding position line for Rwy 20 is on Rwy 13-31.

FORT LEONARD WOOD

WAYNESVILLE-ST. ROBERT RGNL
FORNEY FLD (TBN)

HS 1	Arriving and departing acft must use the intersection at the southeast end of Rwy 14-32 to access the rwy. There is no parallel twy. Arriving and departing tfc may be required to back-taxi.
------	---

JEFFERSON CITY

JEFFERSON CITY
MEMORIAL (JEF)

HS 1	Complex intersection of twys and rwys. Rwy 12-30 intersects with Twy B and Rwy 09-27. Acft eastbound on Twy B from Rwy 12-30, holding position markings are for Rwy 12-30.
HS 2	Acft taxiing on Twy B to Rwy 27, be prepared for the holding position markings just out of the turn.

JOPLIN

JOPLIN RGNL (JLN)

HS 1	All acft exiting the General Aviation Ramp on Twy B be prepared to hold west of Rwy 18-36 for both Rwy 18-36 and Rwy 05-23.
HS 2	Twy C ramp exit is in close proximity to the rwy holding position line for Rwy 18-36. Twy C intersects with Rwy 18-36 immediately after leaving the ramp area.

KANSAS CITY

CHARLES B. WHEELER
DOWNTOWN (MKC)

HS 1	On Twy G, holding position markings for Rwy 03-21 are unusual due to the angle that Twy G intersects with Rwy 03-21.
------	--

	HS 2	<p>Twy D intersects with Rwy 03–21 and Rwy 01–19. Holding position markings for Rwy 03–21 and Rwy 01–19 are within the rwy safety area for each other. Twy D is also utilized by acft and vehicles to transition from the east ramps to the west ramps. Acft/vehicles often mistake the second hold short markings when exiting Rwy 01–19 at Twy D as the hold short marking for Rwy 03–21.</p>
	HS 3	<p>Twy F, Twy D, Twy L transition when acft are taxiing northbound. Acft have the tendency to miss the left turn onto Twy L to continue across Rwy 01–19. Utilize extreme caution at night and in low visibility conditions.</p>
KANSAS CITY KANSAS CITY INTL (MCI)	HS 1	<p>Busy vehicle svc road crosses Twy G east of Twy B. Non-movement area begins just west of svc road.</p>
	HS 2	<p>Twy E and Twy F intersection with Rwy 09–27. Immediately after crossing Twy C, both Twy E and Twy cross Rwy 09–27.</p>
	HS 3	<p>Twy C and Twy D intersection with Rwy 01R–19L. Immediately after crossing Twy E, both Twy C and Twy D cross Rwy 01R–19L.</p>
	HS 4	<p>The intersection of Twy B2 and Ottawa Ave. (vehicle svc road). Twy B2 is the only entrance to the general aviation ramp. This svc road is a high tfc vehicle route for airlines and cargo carriers.</p>
KIRKSVILLE KIRKSVILLE RGNL (IRK)	HS 1	<p>Turf Rwy 09–27 taxi route enters Rwy 18–36 approximately 1000' south of the apch end of Rwy 18 between Twy A and Twy B.</p>
ST. JOSEPH, MO ROSECRANS MEMORIAL (STJ)	HS 1	<p>Use caution exiting the ramp area on Twy B. Twy B crosses Rwy 17–35 immediately after leaving ramp area.</p>
	HS 2	<p>Apch ends of Rwy 35 and Rwy 31 are both accessed via Twy A. When departing northbound, cross check compass on rwy to verify use of correct rwy for departure.</p>
	HS 3	<p>Twy B intersects Rwy 13 approximately 2000' from apch end. Back taxi clearance required for full length departure on Rwy 13.</p>
ST. LOUIS LAMBERT-ST. LOUIS INTL. (STL)	HS 1	<p>Use caution when approaching the intersection of Twy D and Twy L be careful not to cross the hold marking for Rwy 12R–30L without ATC authorization.</p>
	HS 2	<p>Acft approaching Rwy 29 on Twy T, do not turn left on Twy A. Taxi straight ahead to Rwy 29.</p>
	HS 3	<p>Acft northwest on Twy F from the FBO or cargo ramp to Rwy 12L use diligence to not miss the left turn onto Twy S. If the left turn at Twy S is missed, do not cross the hold marking for Rwy 06–24 without ATC authorization.</p>
ST. LOUIS SPIRIT OF ST. LOUIS (SUS)	HS 1	<p>Northwest bound tfc on Twy B use caution entering complex intersection with Twy Z, Twy D, and Twy C. The close proximity of Twy C and Twy D, immediately after the turn onto Twy Z can be confusing.</p>
	HS 2	<p>On Twy B west of the blue port-a-ports, twr can not maintain visual ctc with vehicles and small acft.</p>
	HS 3	<p>On Twy B northwest of Twy A, twr can not maintain visual ctc with vehicles and acft.</p>
SPRINGFIELD SPRINGFIELD-BRANSON NATIONAL (SGF)	HS 1	<p>Acft exiting the Old Terminal ramp to the west, use caution as Twy D and Twy N are in close proximity to the rwys and angles create unusual holding positions.</p>
	HS 2	<p>Northeast bound tfc on Twy F must remain alert so as to not mistake Rwy 14–32 for a parallel twy. First left turn out of ramp area is Rwy 14–32.</p>
	HS 3	<p>Due to large acft parked on the Air Cargo Ramp, twr may be unable to maintain visual ctc with small acft taxiing northbound on Twy U north of Twy B.</p>

NEBRASKA

GRAND ISLAND CENTRAL NEBRASKA RGNL (GRI)	HS 1	When taxiing to the apch end of Rwy 13, use caution as Twy B crosses the apch end of Rwy 17. Rwy 17 holding position markings are accompanied by rwy guard lgts on both sides of the rwy.
	HS 2	Twy C crossed Rwy 17 immediately after leaving ramp area. Intersection of Rwy 17-35 and Twy C has rwy guard lgts on both sides of the rwy.
LINCOLN LINCOLN (LNK)	HS 1	Rwy 18-36, Rwy 14-32 and Twy D, Twy E and Twy J all intersect with each other in a small area. Angles of intersection can make sighting tfc difficult.
	HS 2	Rwy 32 apch holding position is located on Twy A, immediately past the Twy A run up area.
OMAHA EPPLEY AIRFIELD (OMA)	HS 1	A complex intersection of Twy S, Twy F, and Twy B is located between Rwy 14R-32L and the intersection of Rwy 14L-32R and Rwy 18-36.
	HS 2	Intersection of Twy F and Rwy 14R-32L is in close proximity to the ramp at Twy C.
	HS 3	Intersection of Twy A and Rwy 18-36 is in close proximity to the ramp at Twy C.

NORTH DAKOTA

GRAND FORKS GRAND FORKS INTL (GFK)	HS 1	Clearance necessary to cross Rwy 09L and Twy A intersection.
	HS 2	Clearance necessary to cross Rwy 17R and Twy B intersection.


SOUTH DAKOTA

SIoux FALLS JOE FOSS FIELD (FSD)	HS 1	Complex twy intersection in close proximity of rws.
-------------------------------------	------	---

10210
AIRPORT DIAGRAM

AL-16 (FAA)

ALLIANCE MUNI (AIA)
ALLIANCE, NEBRASKA

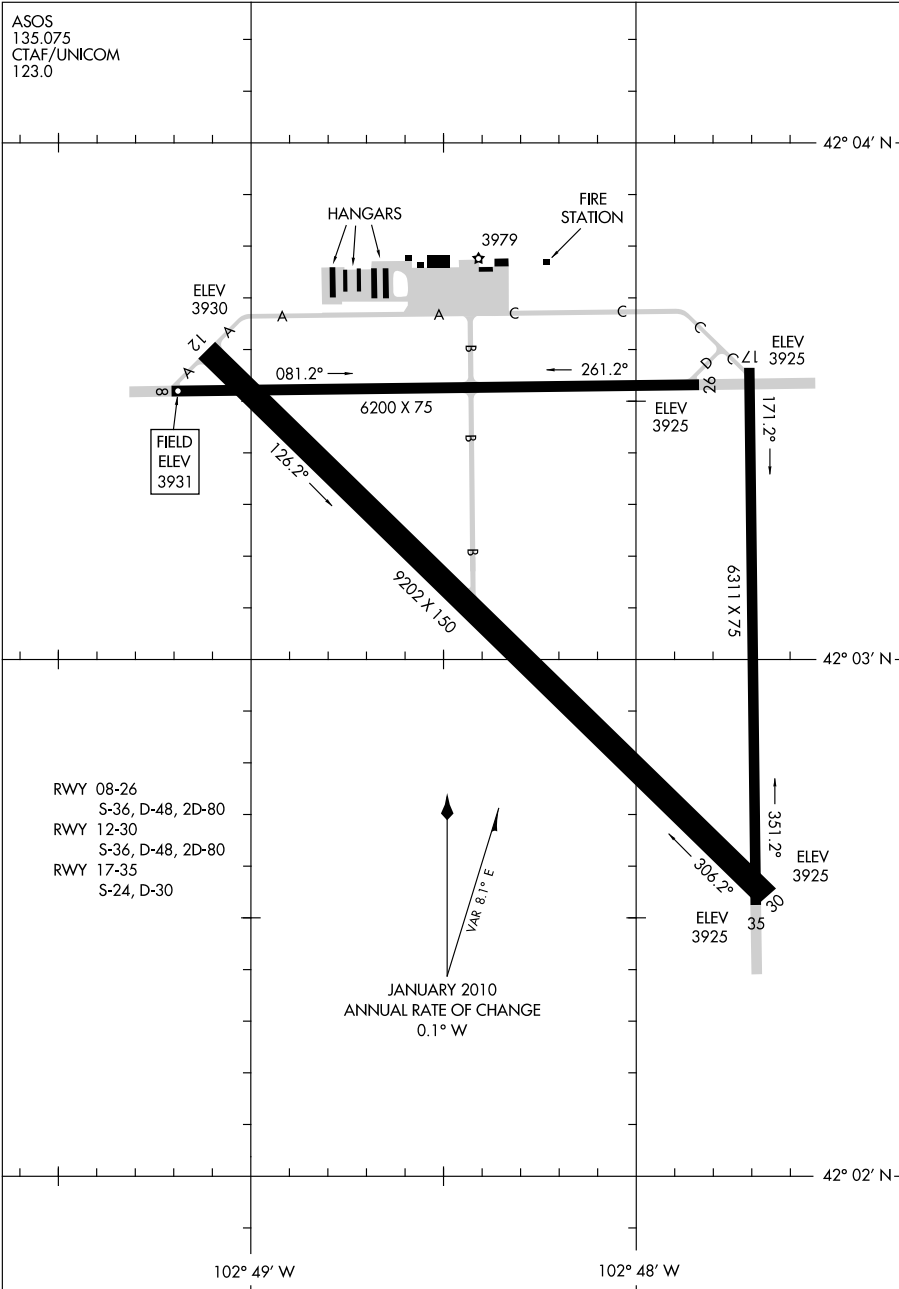

AIRPORT DIAGRAM
10210

ALLIANCE, NEBRASKA
ALLIANCE MUNI (AIA)


10210

AIRPORT DIAGRAM

AL-51 (FAA)

BISMARCK MUNI (BIS)

BISMARCK, NORTH DAKOTA

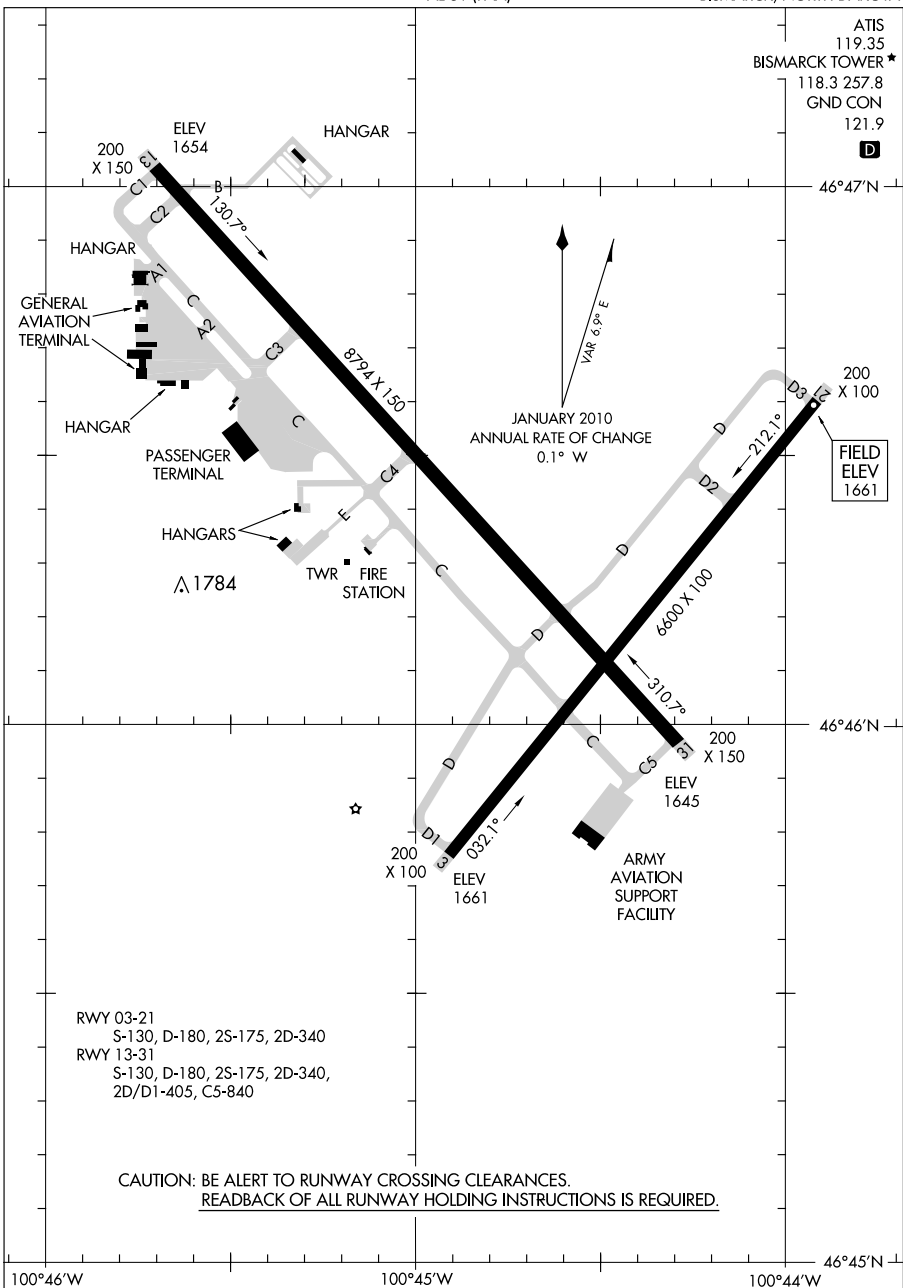

AIRPORT DIAGRAM

10210

BISMARCK, NORTH DAKOTA

BISMARCK MUNI (BIS)

10266

AIRPORT DIAGRAM

AL-10372 (FAA)

BRANSON (BBG)

BRANSON, MISSOURI

ATIS	124.625
BRANSON TOWER ★	128.15
GND CON	118.4
CLNC DEL	118.4
126.35 (When Tower Closed)	

D

ELEV
1255

TERMINAL

JANUARY 2010
ANNUAL RATE OF CHANGE
0.1° W

HANG

HANGAR FBO

TWR

RWY 14-32 |
S-75, D-200, 2S-175, 2D-350, 2D/2D2-700

7140 X 150

HS 2

FIELD
ELEV
1302

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

93° 12.5' W

93° 12.0' W

93° 11.5' W

AIRPORT DIAGRAM

10266

BRANSON, MISSOURI

BRANSON (BBG)

NC, 23 SEP 2010 to 18 NOV 2010

10210

AIRPORT DIAGRAM

BURLINGTON/SOUTHEAST IOWA RGNL (BRL)


BURLINGTON, IOWA

ASOS
118.025
CTAF/UNICOM
123.0



AL-69 (FAA)

792±

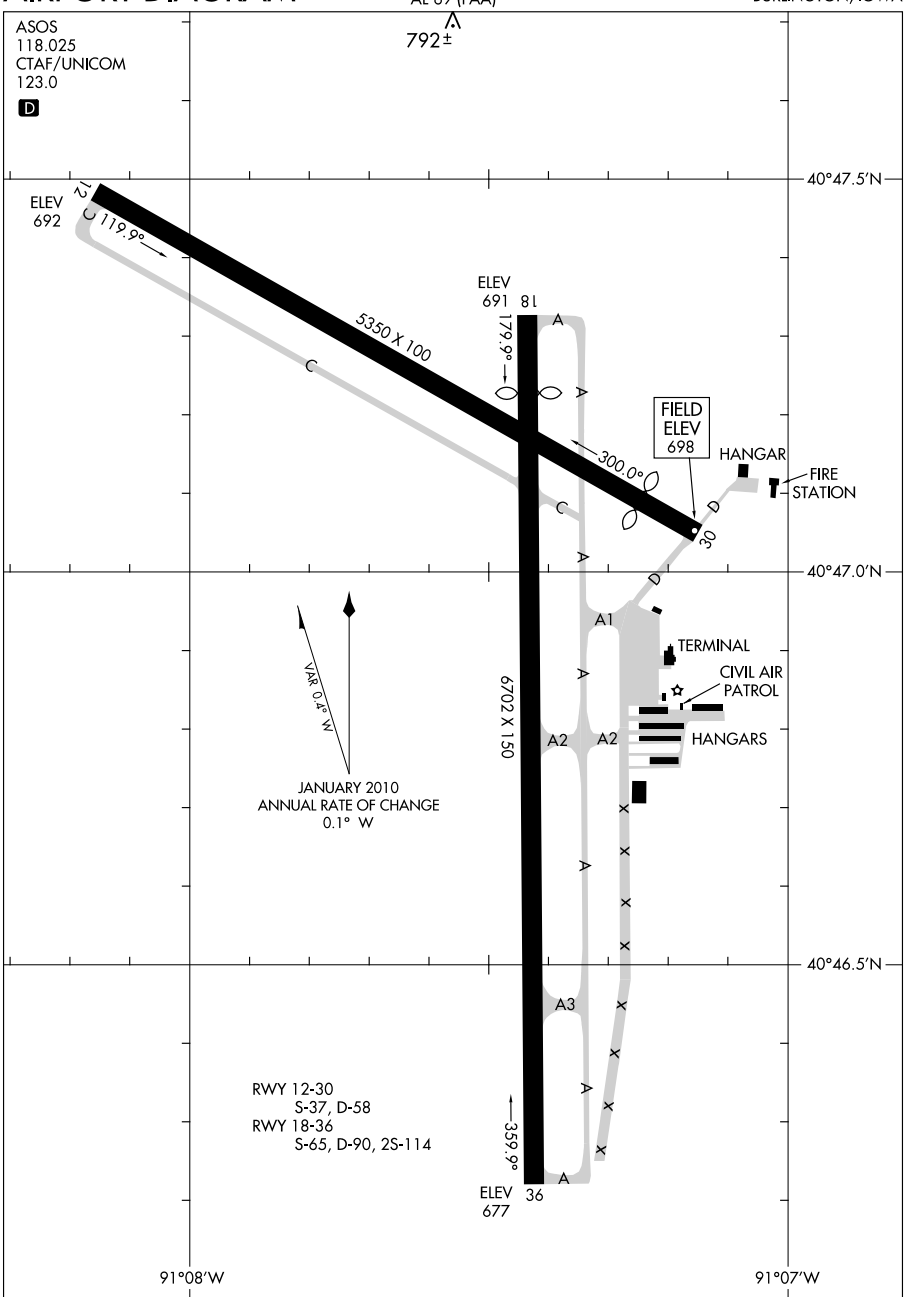

AIRPORT DIAGRAM

10210

BURLINGTON, IOWA

BURLINGTON/SOUTHEAST IOWA RGNL (BRL)

10266

AIRPORT DIAGRAM


CAPE GIRARDEAU RGNL (CGI)
CAPE GIRARDEAU, MISSOURI

ASOS
120.55
CAPE GIRARDEAU TOWER ★
125.525
GND CON
121.6

AL-943 (FAA)

JANUARY 2010
ANNUAL RATE OF CHANGE
0.1° W

37°14'N

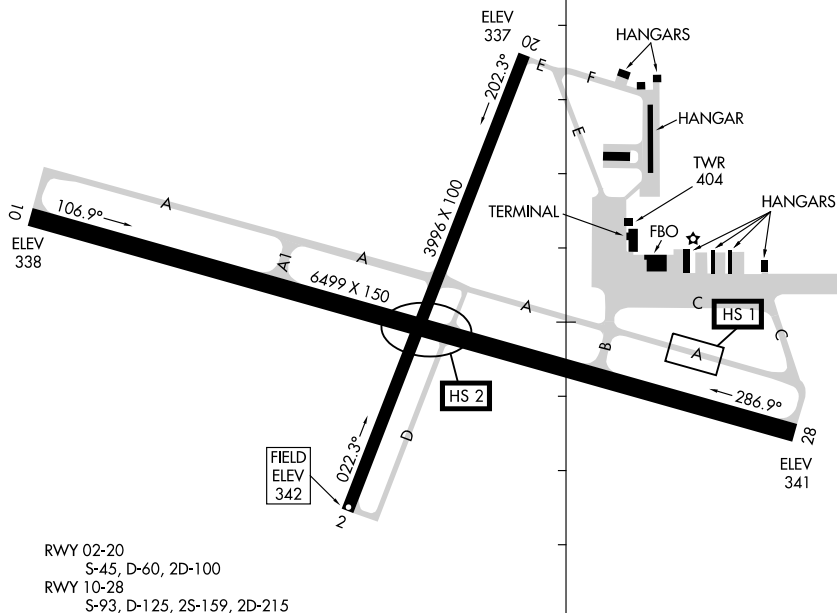

RWY 02-20
S-45, D-60, 2D-100
RWY 10-28
S-93, D-125, 2S-159, 2D-215

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

37°13'N

89°35'W

89°34'W

AIRPORT DIAGRAM

CAPE GIRARDEAU, MISSOURI
CAPE GIRARDEAU RGNL (CGI)

10266

NC. 23 SEP 2010 to 18 NOV 2010


10266

AIRPORT DIAGRAM

AL-250 (FAA)

CEDAR RAPIDS/ THE EASTERN IOWA (CID)

CEDAR RAPIDS, IOWA

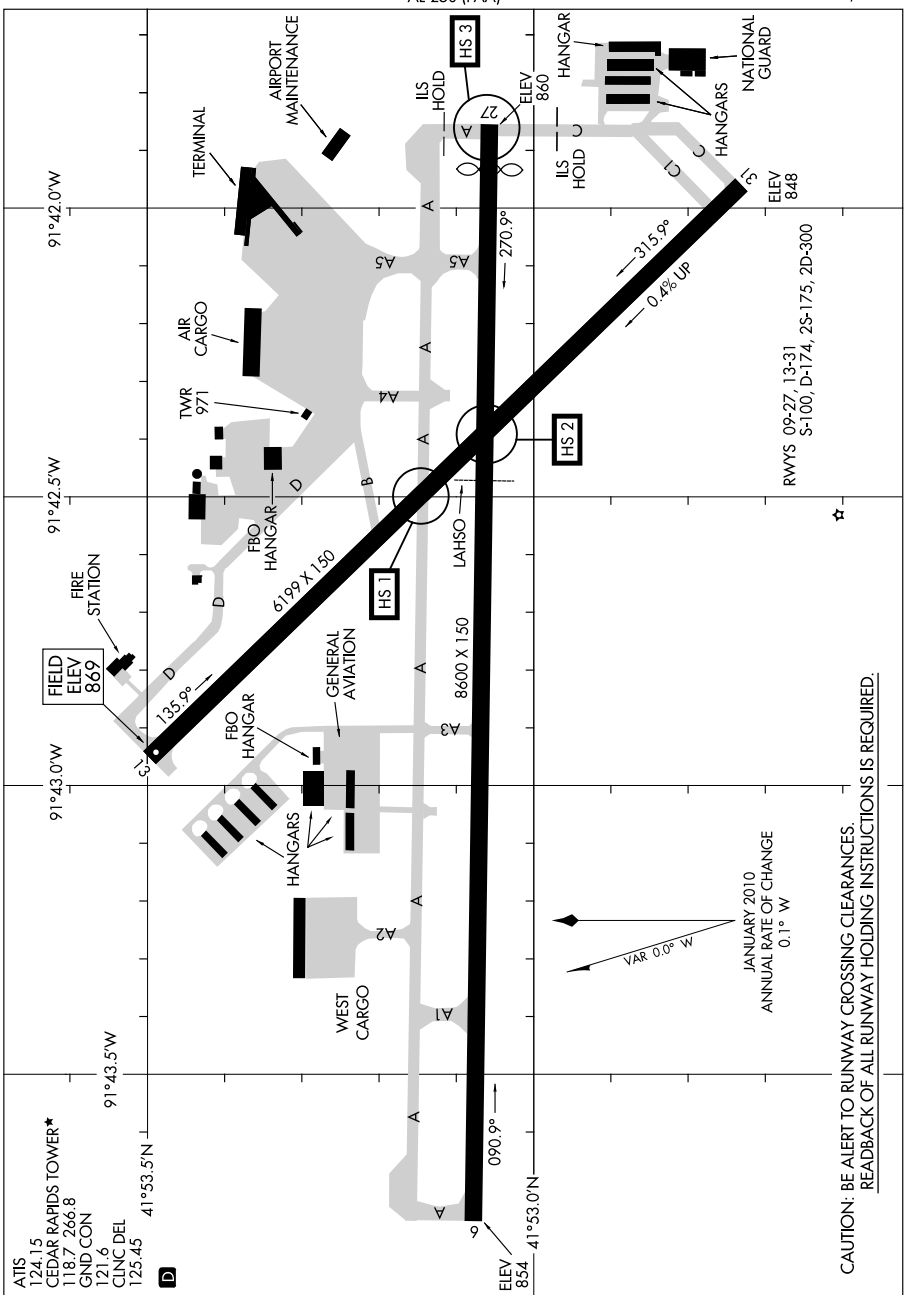

AIRPORT DIAGRAM

CEDAR RAPIDS, IOWA
CEDAR RAPIDS/ THE EASTERN IOWA (CID)


10266

NC. 23 SEP 2010 to 18 NOV 2010

10210
AIRPORT DIAGRAM

AL-972 (FAA)

CLINTON MUNI (CWI)
CLINTON, IOWA

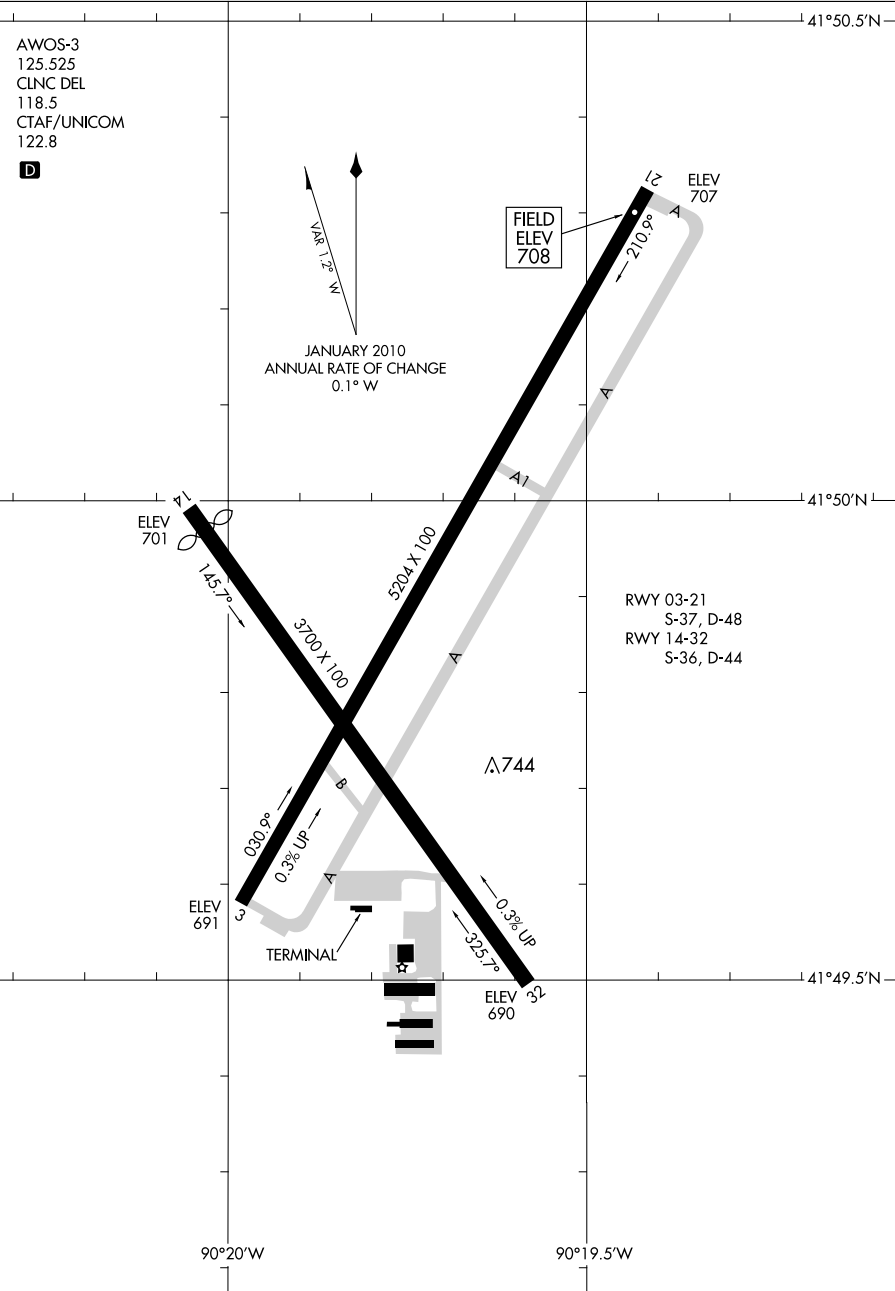


AIRPORT DIAGRAM

CLINTON, IOWA
CLINTON MUNI (CWI)

10266

AIRPORT DIAGRAM

AL-5595 (FAA)

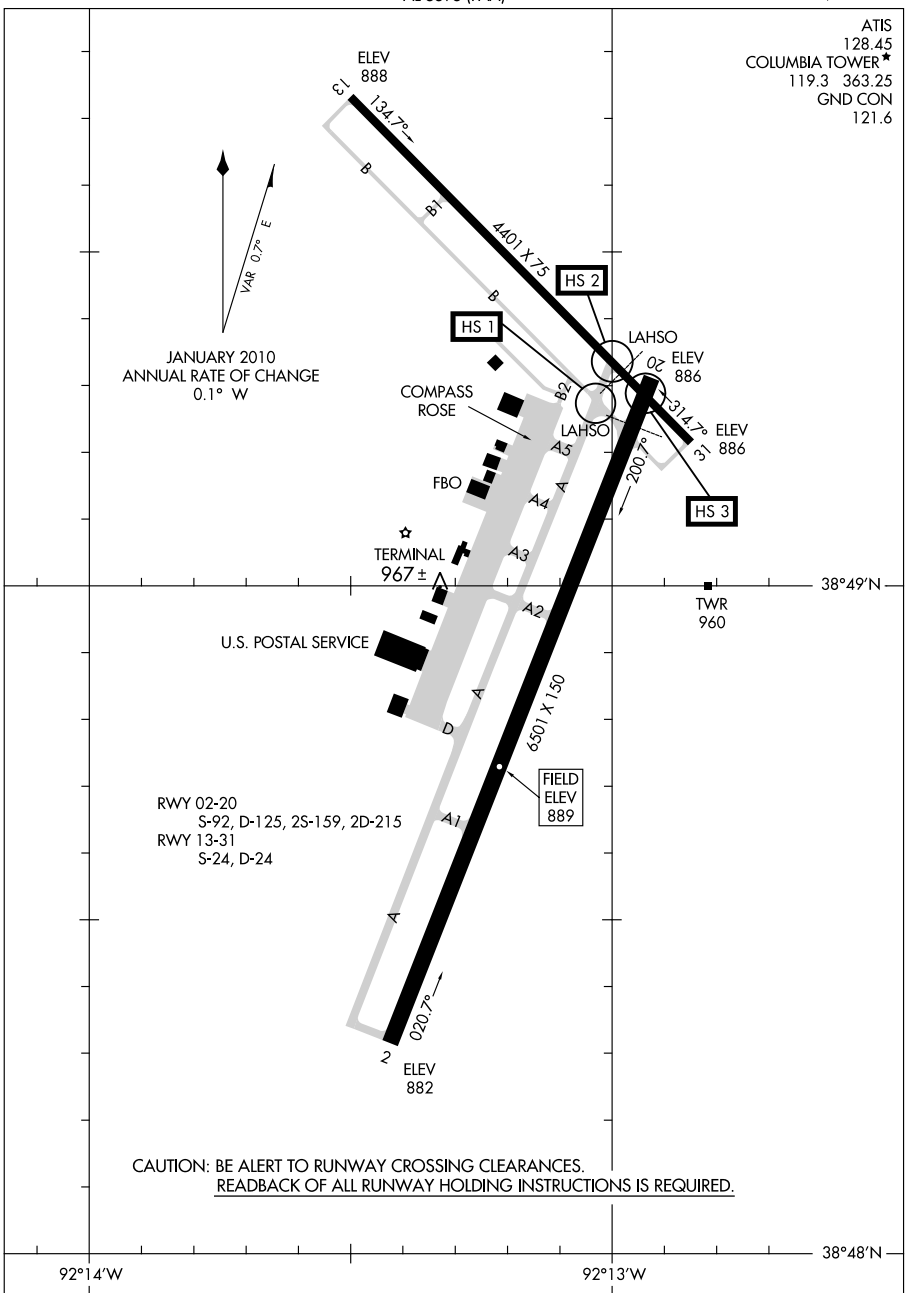COLUMBIA RGNL (COU)
COLUMBIA, MISSOURI

AIRPORT DIAGRAM

10266

COLUMBIA, MISSOURI
COLUMBIA RGNL (COU)


NC. 23 SEP 2010 to 18 NOV 2010

10266

AIRPORT DIAGRAM

AL-117 (FAA)

DES MOINES INTL (DSM)
DES MOINES, IOWA

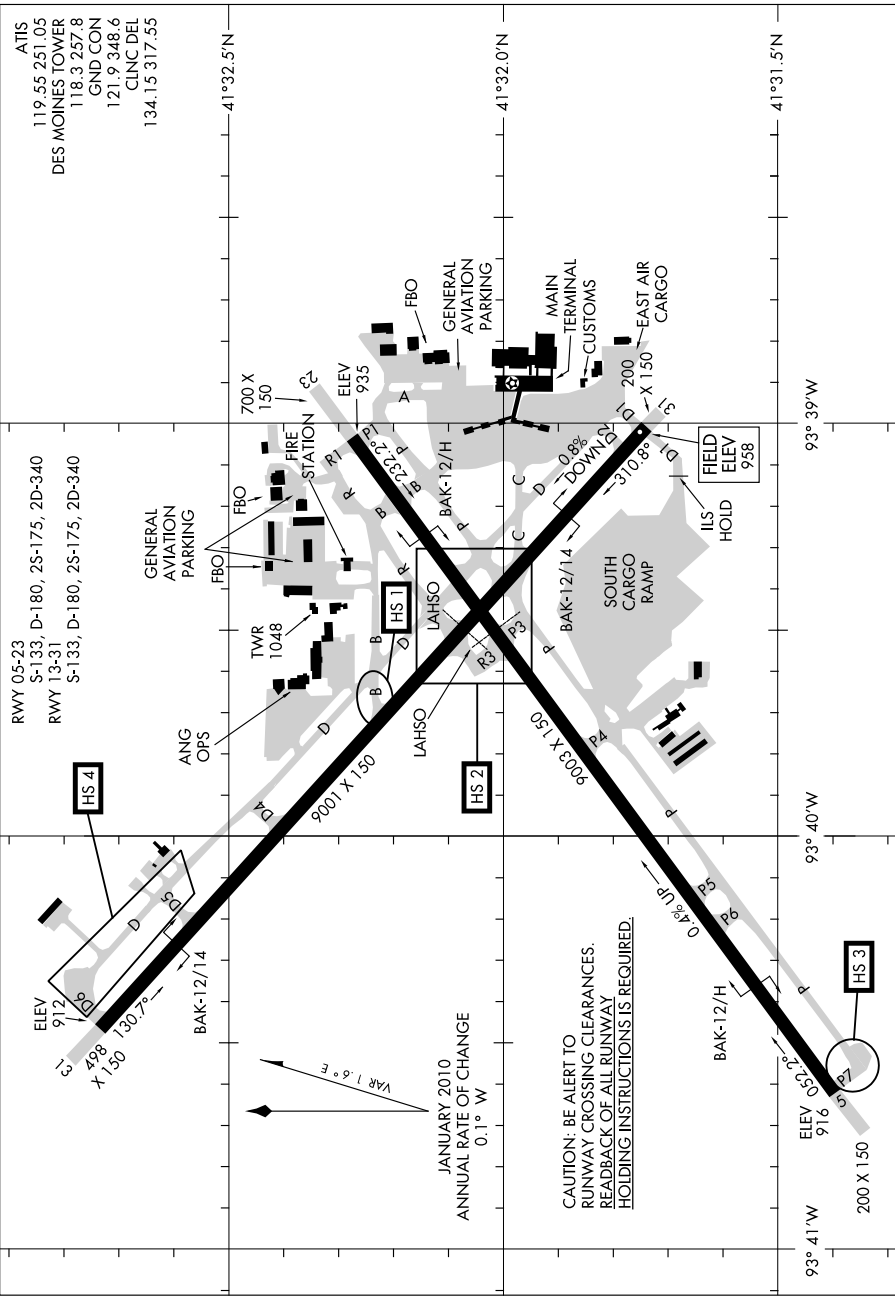

AIRPORT DIAGRAM

DES MOINES, IOWA
DES MOINES INTL (DSM)

10266

10266


AIRPORT DIAGRAM

AL-676 (FAA)

DODGE CITY RGNL (DDC)
DODGE CITY, KANSAS

ASOS
118.525
CTAF/UNICOM
122.7

D

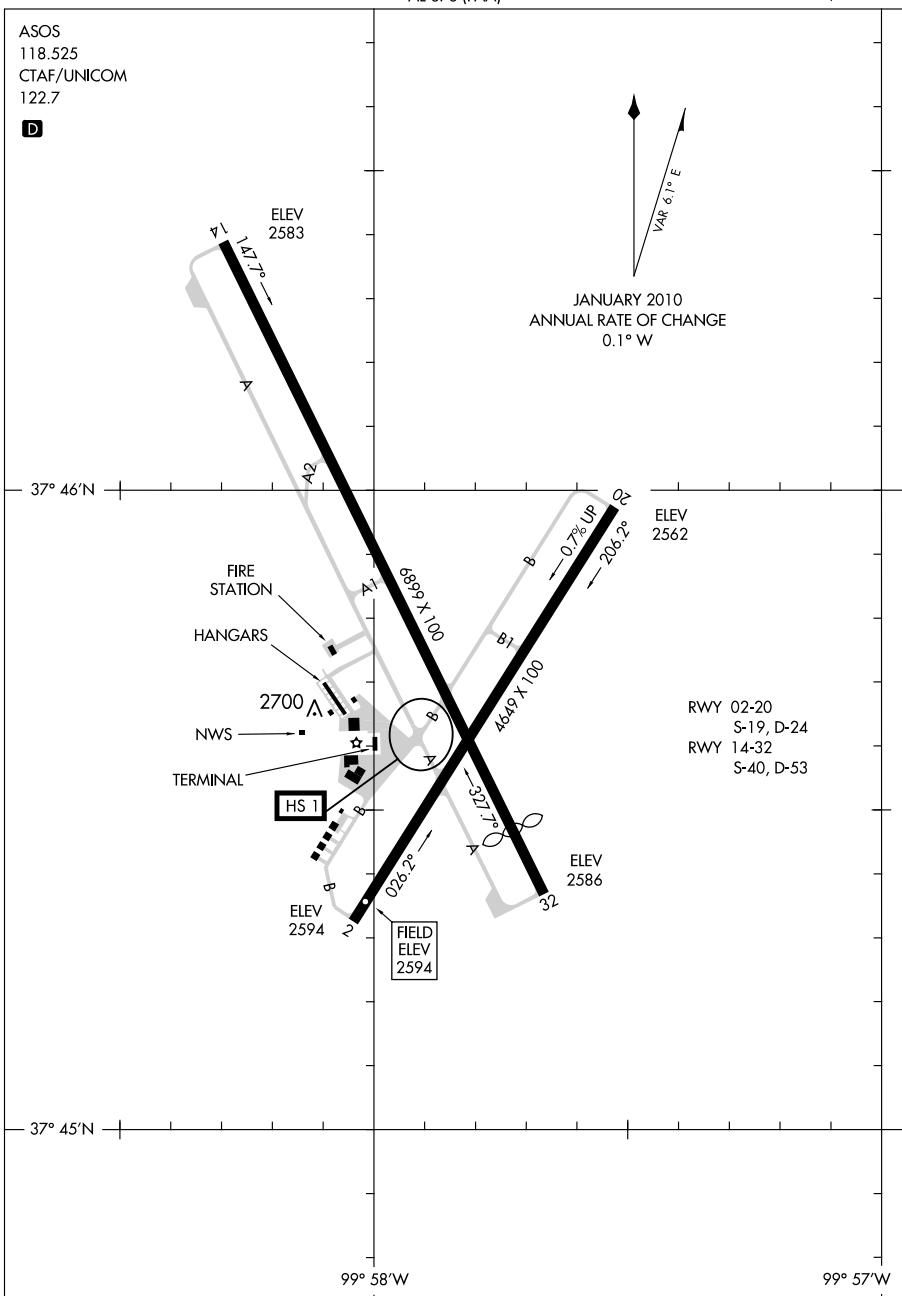

AIRPORT DIAGRAM


10266

DODGE CITY, KANSAS
DODGE CITY RGNL (DDC)

AIRPORT DIAGRAM

AL-923 (FAA)

DUBUQUE RGNL (DBQ)
DUBUQUE, IOWA

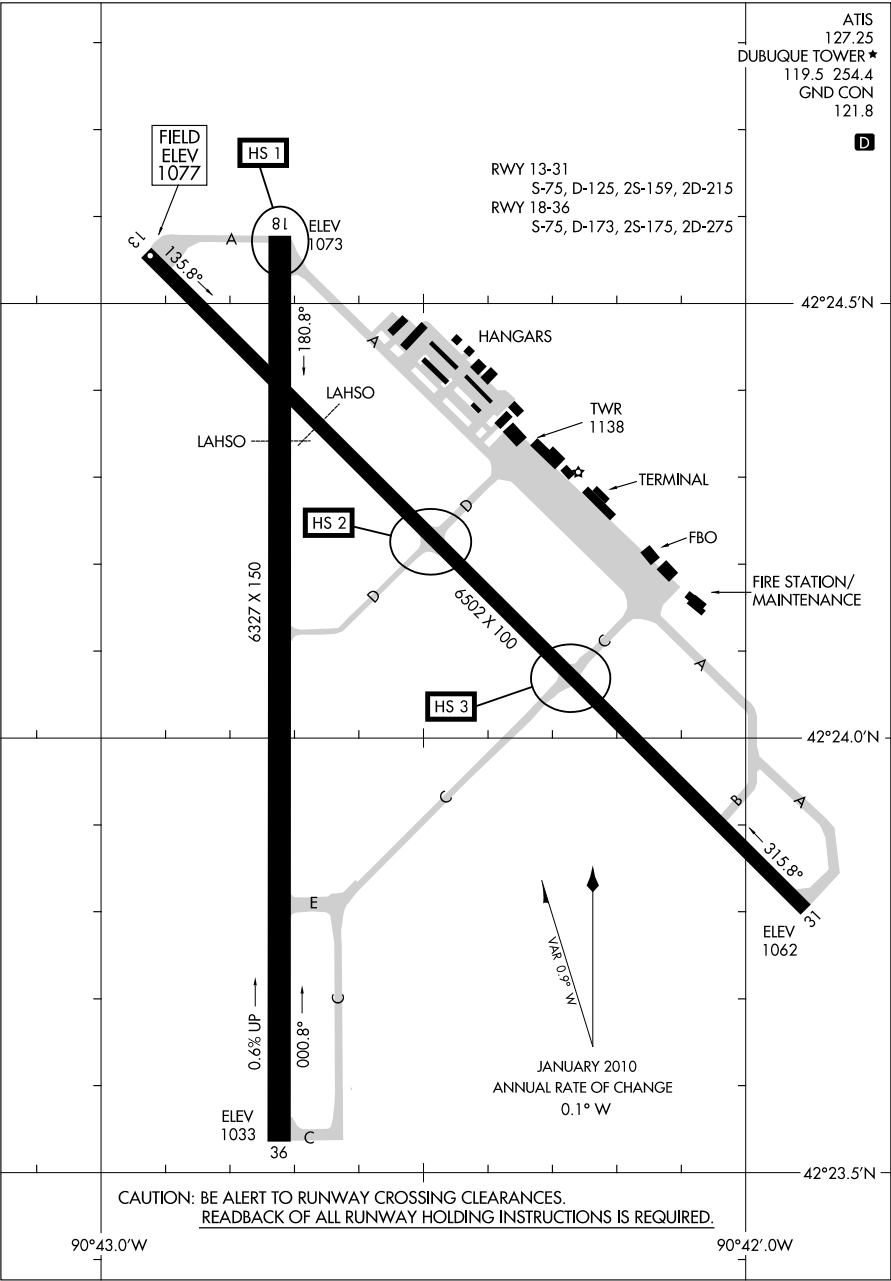

AIRPORT DIAGRAM

DUBUQUE, IOWA
DUBUQUE RGNL (DBQ)


09239

AIRPORT DIAGRAM

AFD-343 [USAF]

ELLSWORTH AFB (KRCA)

RAPID CITY, SOUTH DAKOTA

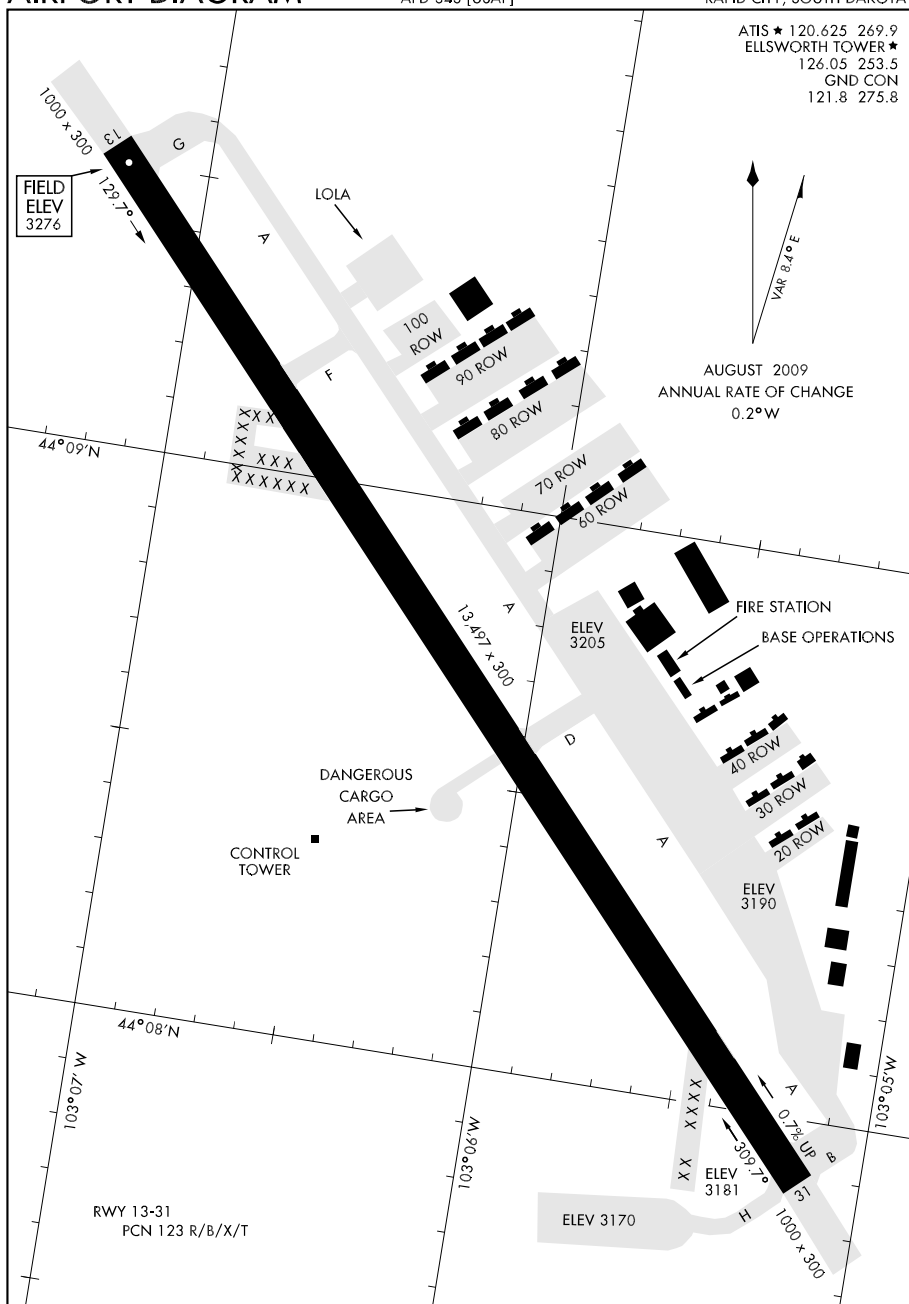

AIRPORT DIAGRAM


RAPID CITY, SOUTH DAKOTA

ELLSWORTH AFB (KRCA)

NC, 23 SEP 2010 to 18 NOV 2010

10210

AIRPORT DIAGRAM

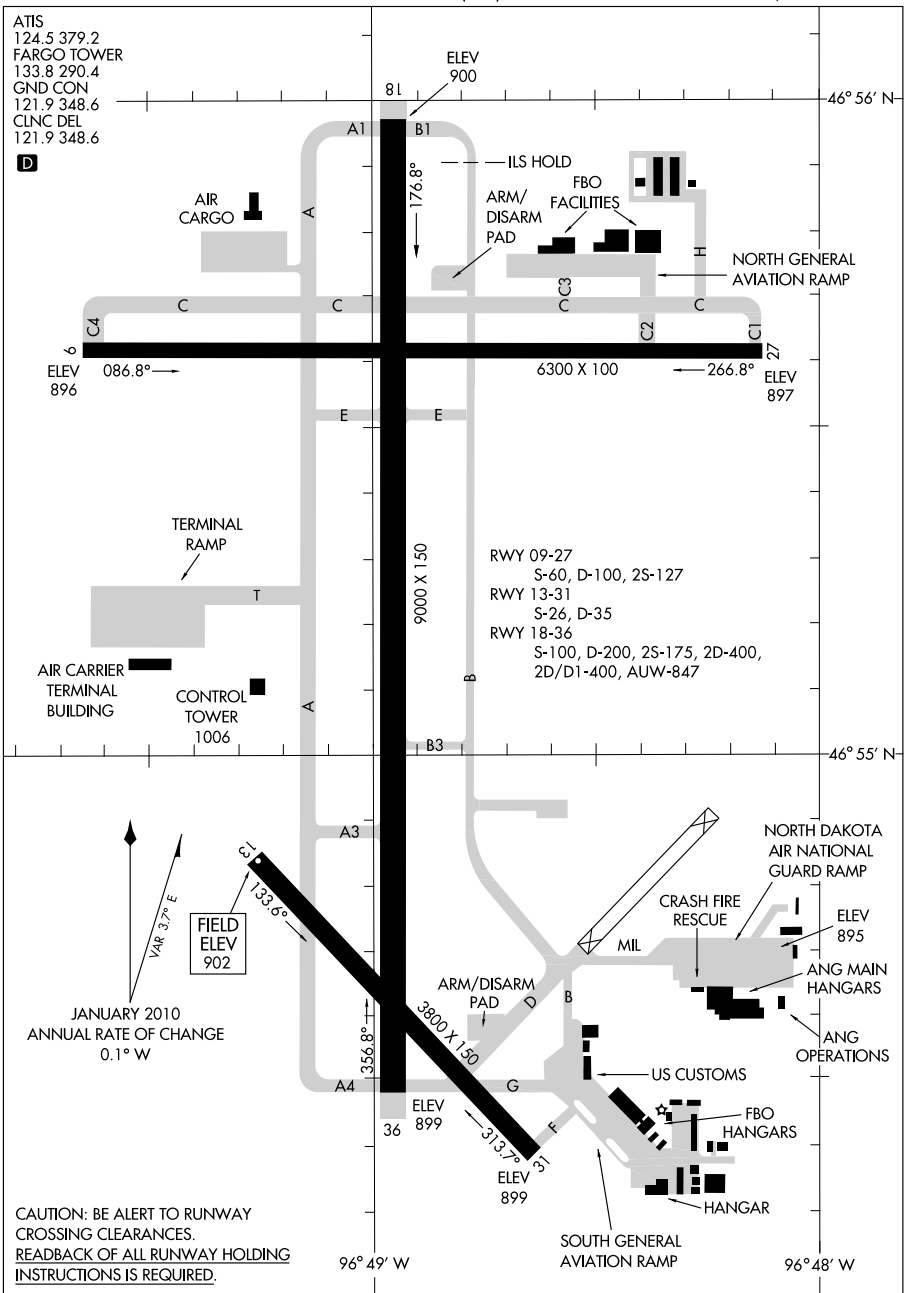FARGO/HECTOR INTL (FAR)
FARGO, NORTH DAKOTA

AIRPORT DIAGRAM

FARGO, NORTH DAKOTA
FARGO/HECTOR INTL (FAR)

10210

AIRPORT DIAGRAMS


10266

AIRPORT DIAGRAM

AL-976 (FAA)

FORT DODGE RGNL (FOD)

FORT DODGE, IOWA

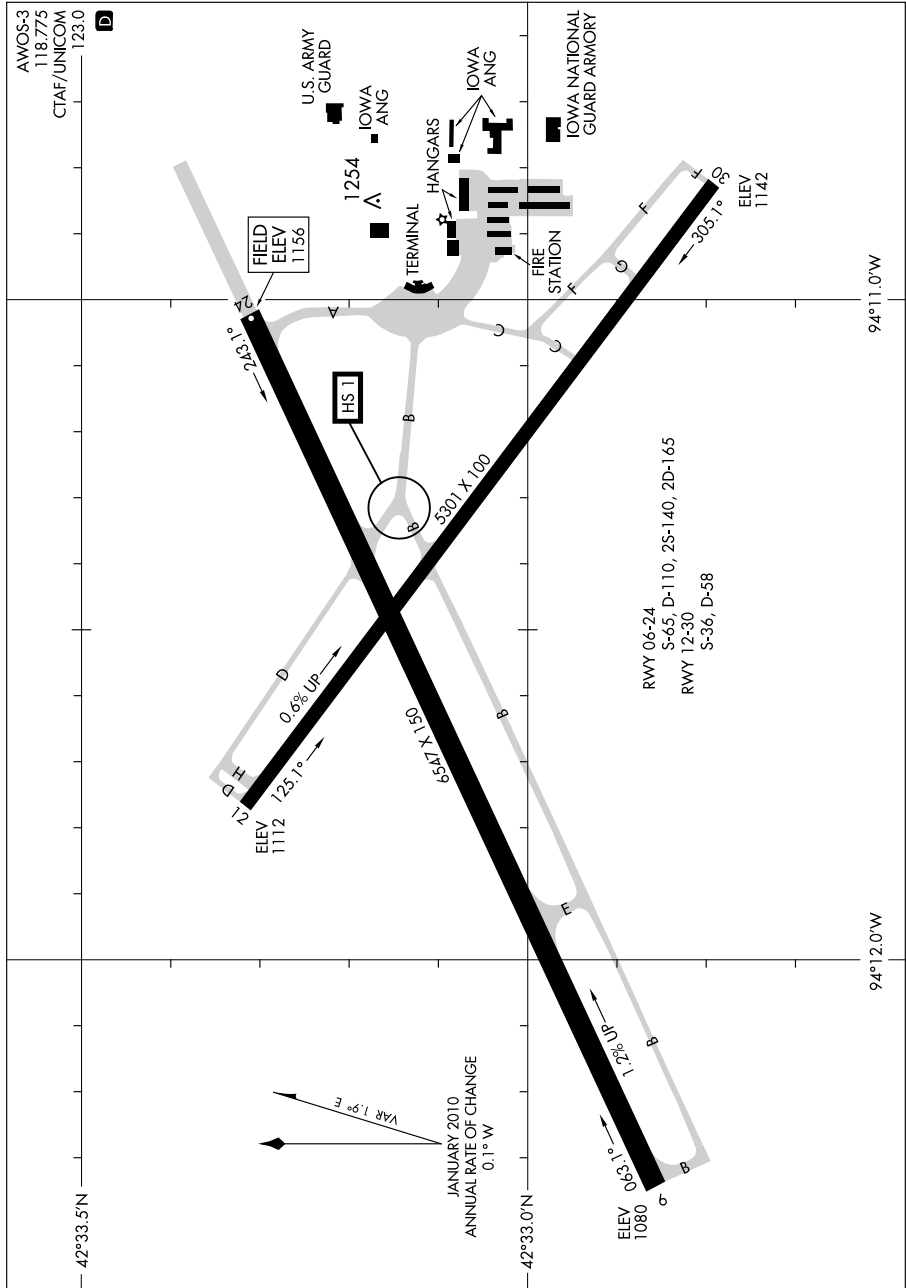

AIRPORT DIAGRAM

10266

FORT DODGE, IOWA

FORT DODGE RGNL (FOD)

NC. 23 SEP 2010 to 18 NOV 2010


10266

AIRPORT DIAGRAM

FT. LEONARD WOOD/WAYNESVILLE-ST. ROBERT RGNL FORNEY FIELD (TBN)

AL-5093 (FAA)

FT. LEONARD WOOD, MISSOURI

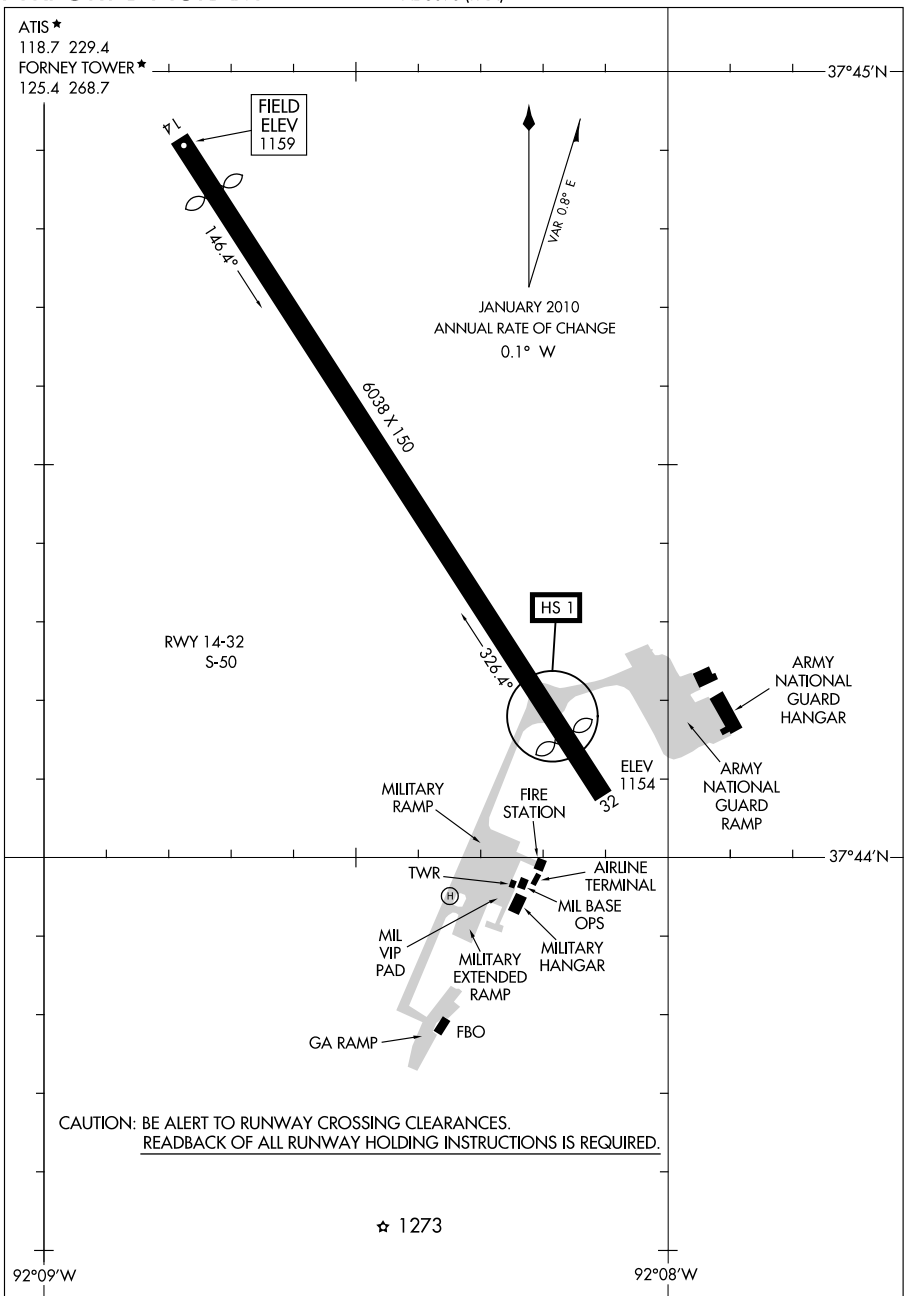

AIRPORT DIAGRAM

10266


FT. LEONARD WOOD/WAYNESVILLE-ST. ROBERT RGNL FORNEY FIELD (TBN)

FT. LEONARD WOOD, MISSOURI

10266

AIRPORT DIAGRAM

GARDEN CITY RGNL (GCK)
GARDEN CITY, KANSAS

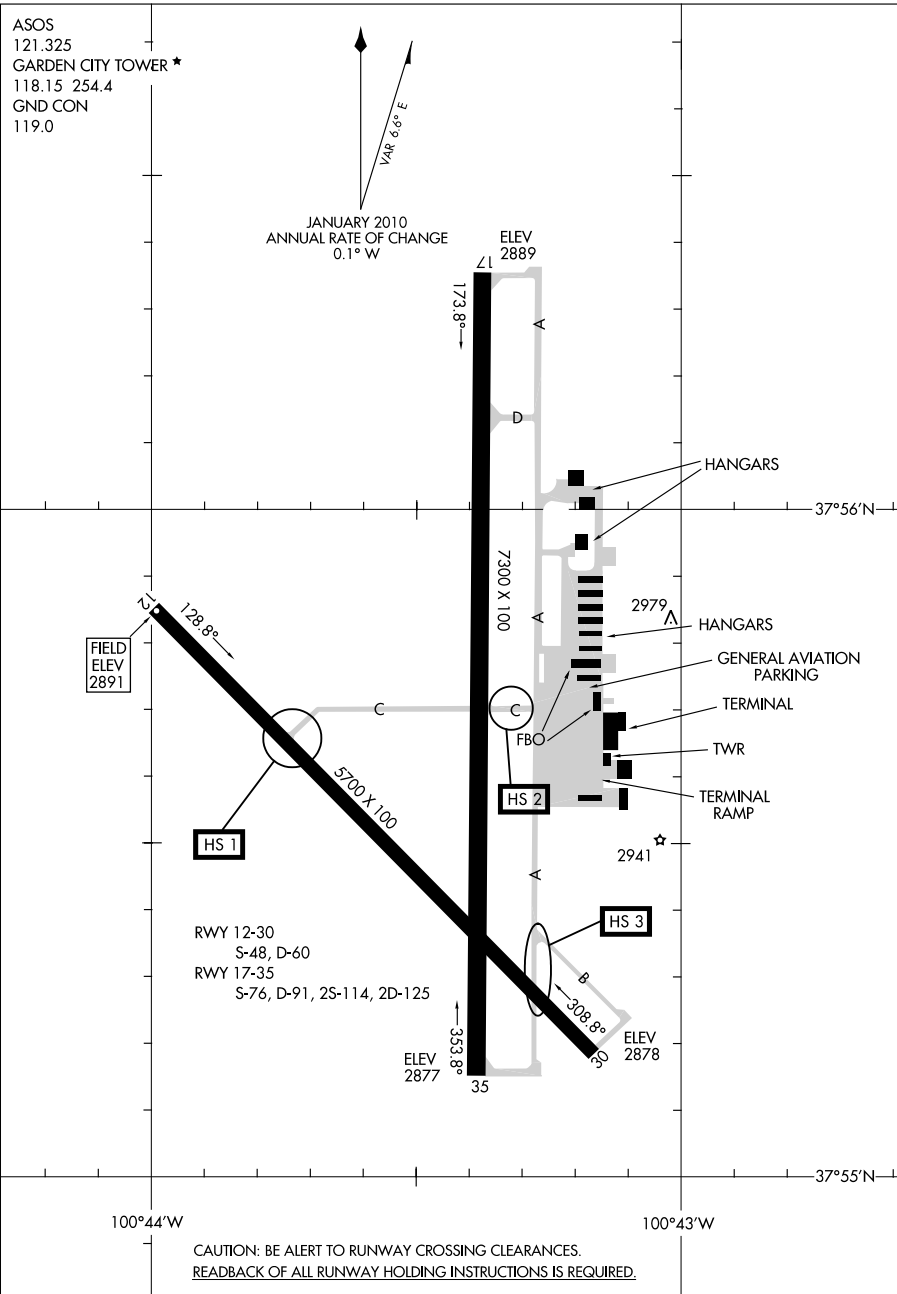

AIRPORT DIAGRAM

GARDEN CITY, KANSAS
GARDEN CITY RGNL (GCK)


10266

10210

AIRPORT DIAGRAM

GOODLAND/RENNER FIELD/GOODLAND MUNI (GLD)
AL-684 (FAA) GOODLAND, KANSAS

ASOS
121.025
CTAF/UNICOM
122.95

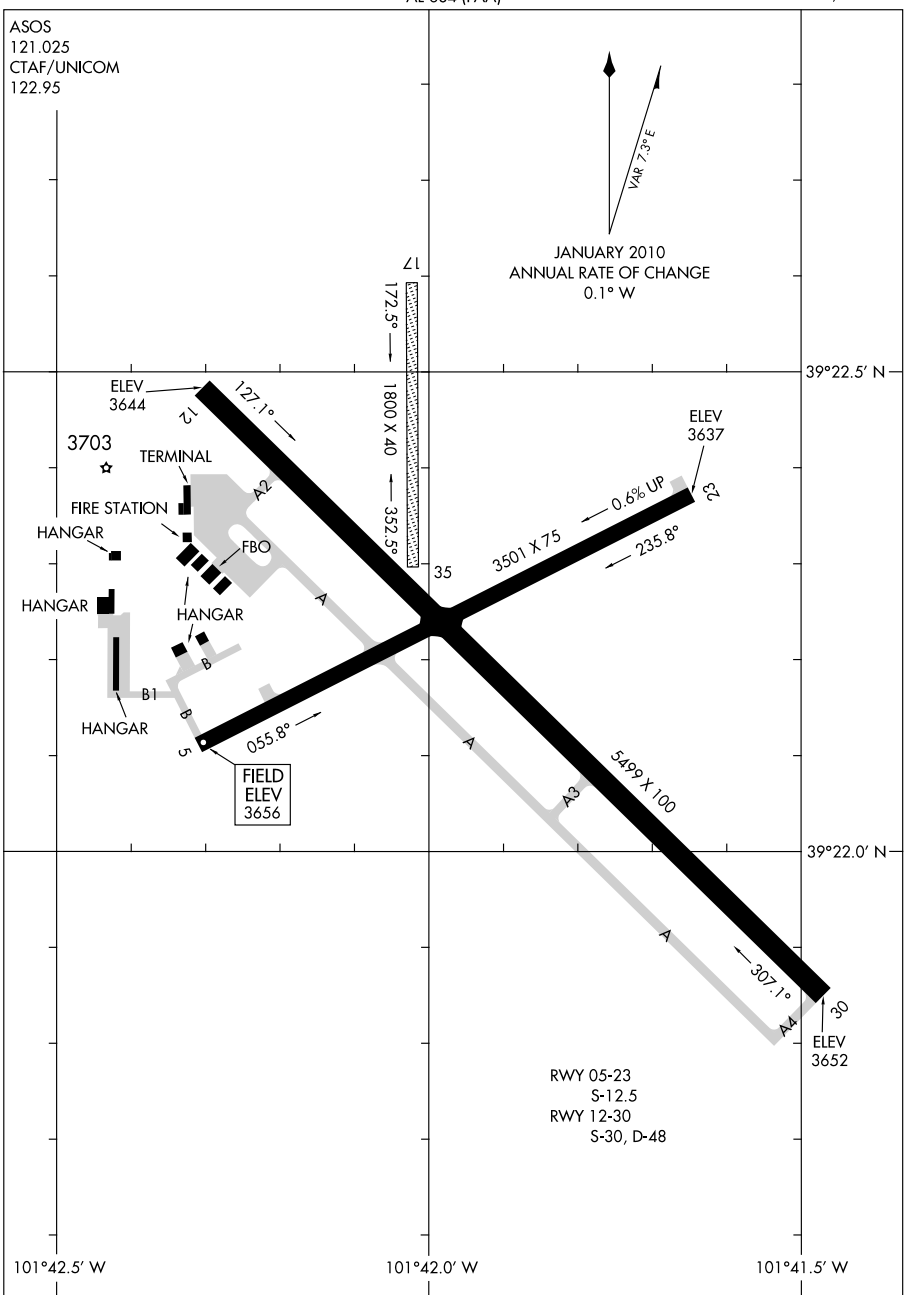

AIRPORT DIAGRAM

10210

GOODLAND, KANSAS
GOODLAND/RENNER FIELD/GOODLAND MUNI (GLD)


10210

AIRPORT DIAGRAM

AFD-5010 [USAF]

GRAND FORKS AFB (KRDR)

GRAND FORKS, NORTH DAKOTA

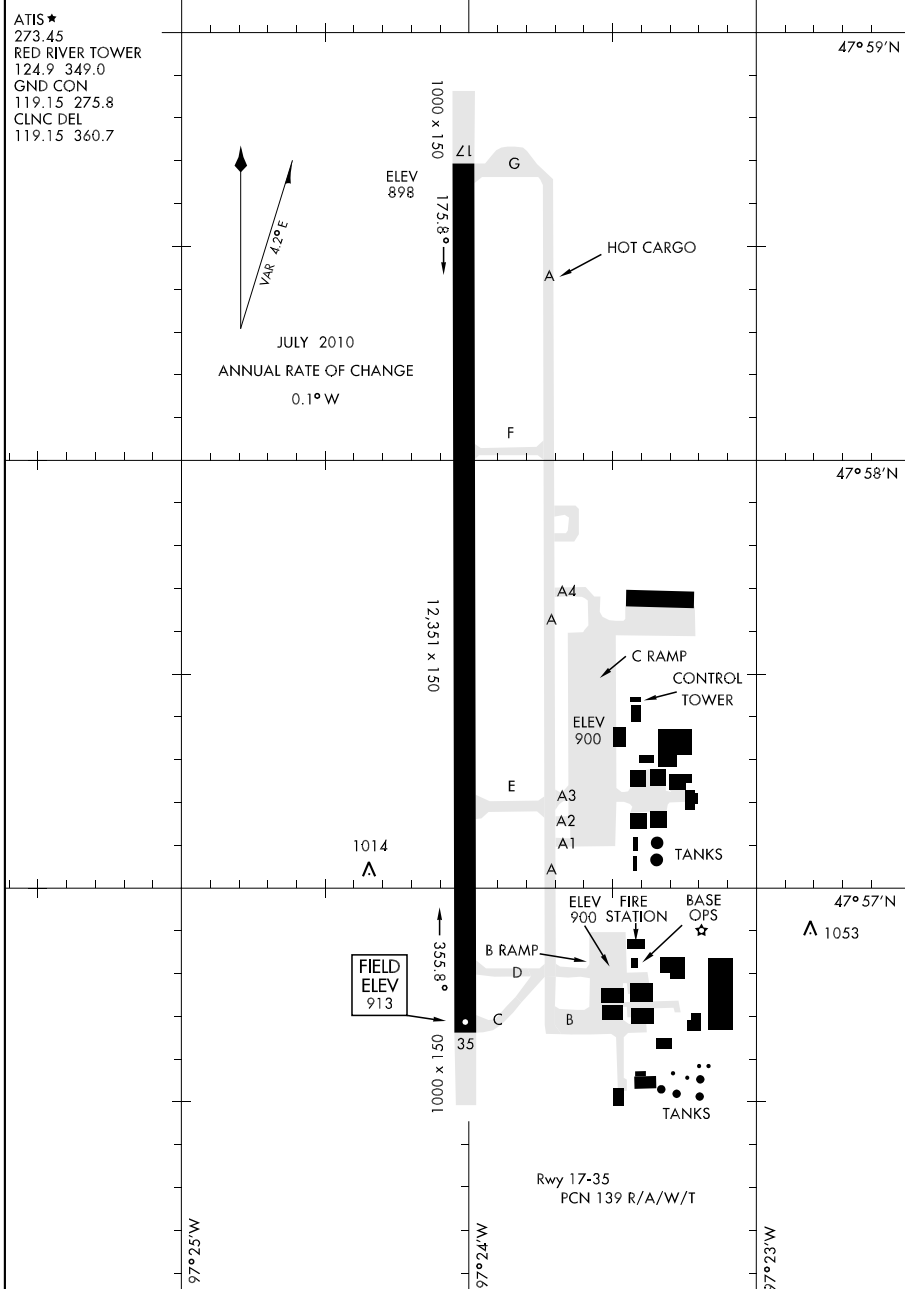

AIRPORT DIAGRAM

GRAND FORKS, NORTH DAKOTA

GRAND FORKS AFB (KRDR)

AIRPORT DIAGRAM

GRAND FORKS INTL (GFK)
GRAND FORKS, NORTH DAKOTA




GRAND FORKS, NORTH DAKOTA
GRAND FORKS INTL (GFK)

NC, 23 SEP 2010 to 18 NOV 2010

10266

AIRPORT DIAGRAM

GRAND ISLAND/ CENTRAL NEBRASKA RGNL (GRI)
AL-173 (FAA) GRAND ISLAND, NEBRASKA

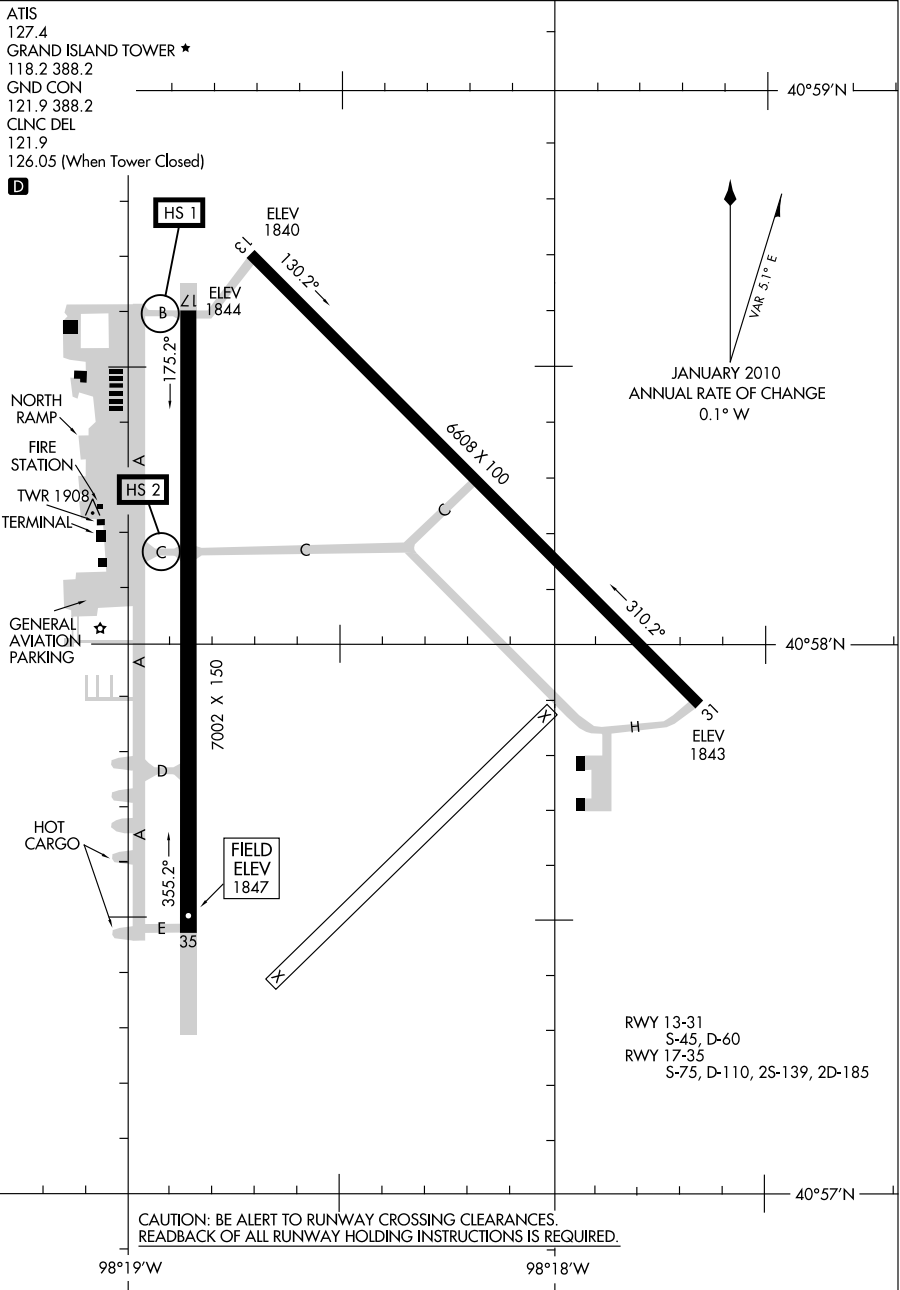

AIRPORT DIAGRAM

10266


GRAND ISLAND, NEBRASKA
GRAND ISLAND/ CENTRAL NEBRASKA RGNL (GRI)

10210

AIRPORT DIAGRAM

AL-175 (FAA)

GREAT BEND MUNI (GBD)
GREAT BEND, KANSAS

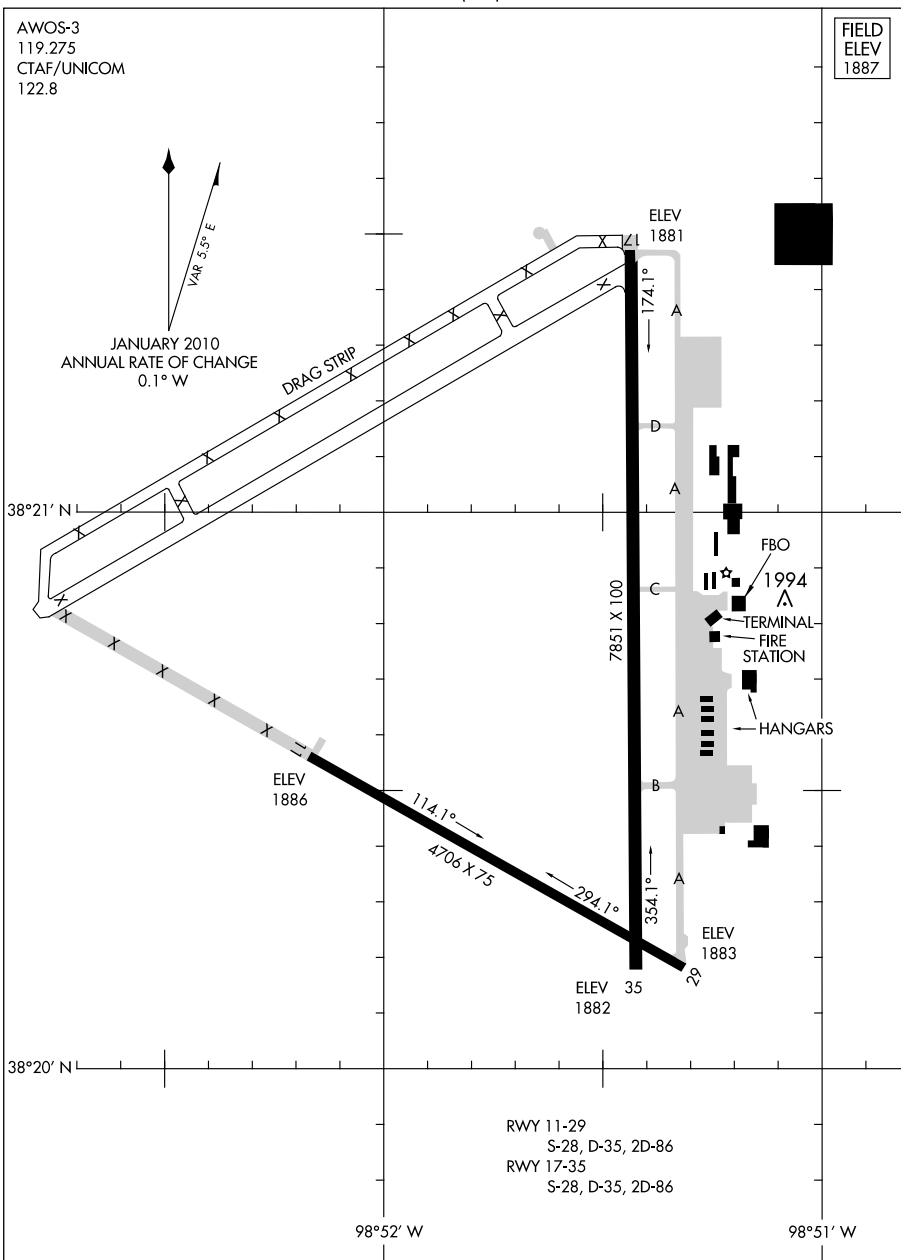

AIRPORT DIAGRAM

10210


GREAT BEND, KANSAS
GREAT BEND MUNI (GBD)

10210

AIRPORT DIAGRAM

AL-5440 (FAA)

HAYS RGNL (HYS)
HAYS, KANSAS

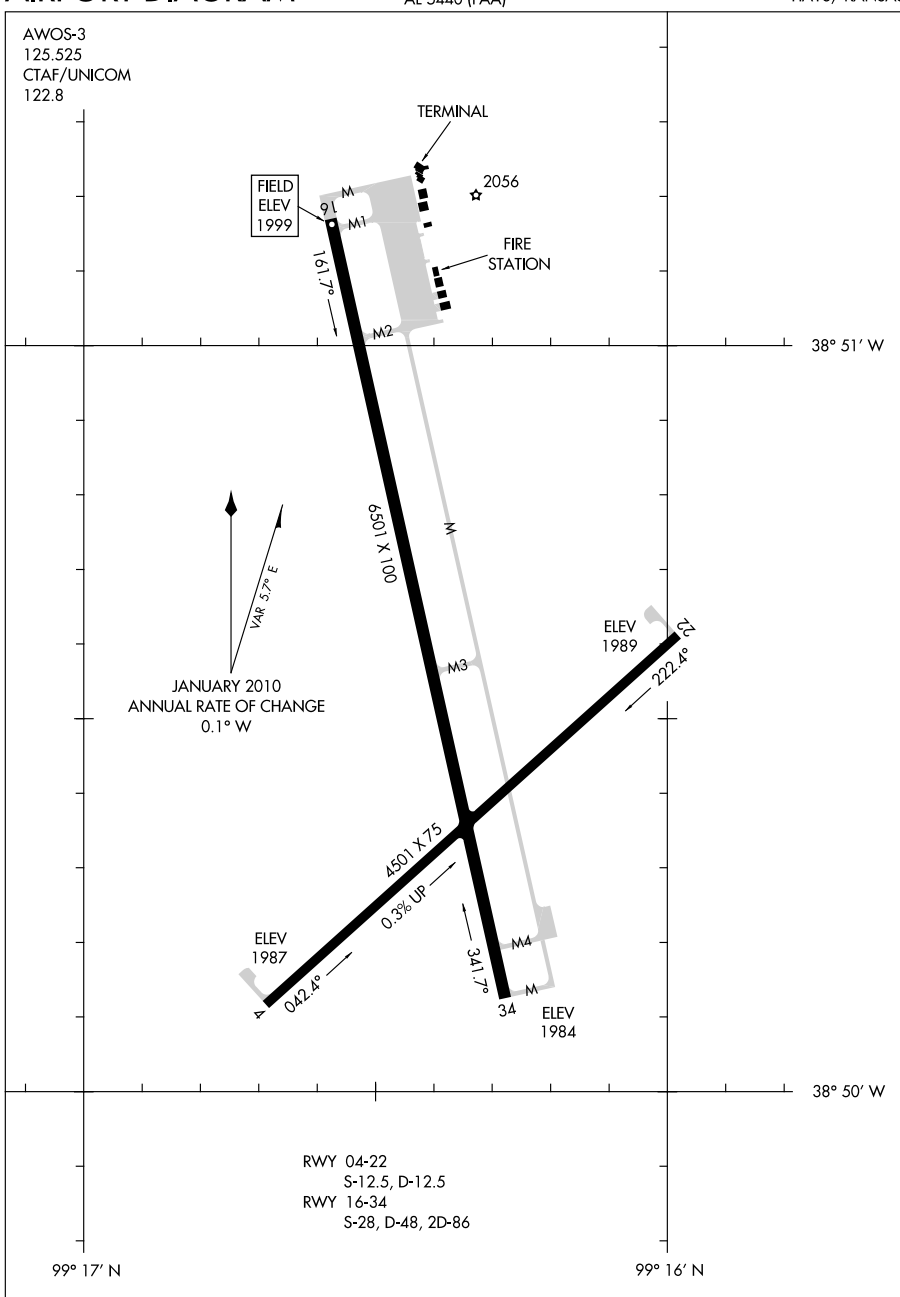

AIRPORT DIAGRAM

10210


HAYS, KANSAS
HAYS RGNL (HYS)

10266

AIRPORT DIAGRAM

AL-200 (FAA)

HUTCHINSON MUNI (HUT)
HUTCHINSON, KANSAS

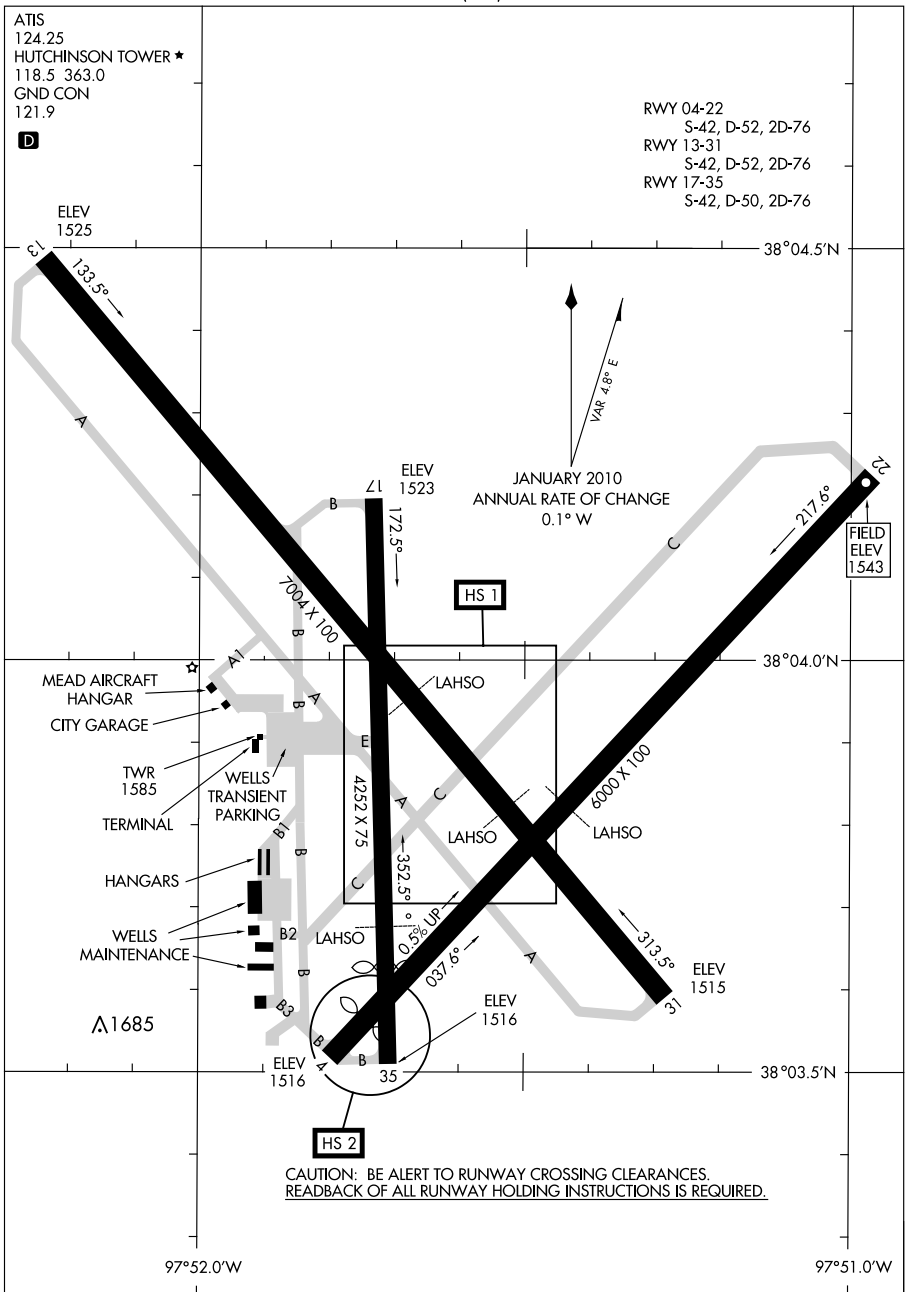

AIRPORT DIAGRAM

10266

HUTCHINSON, KANSAS
HUTCHINSON MUNI (HUT)

NC. 23 SEP 2010 to 18 NOV 2010

JEFFERSON CITY, MISSOURI

JEFFERSON CITY, MISSOURI
JEFFERSON CITY MEMORIAL (JEF)

NC, 23 SEP 2010 to 18 NOV 2010


10266

AIRPORT DIAGRAM

AL-540 (FAA)

JOPLIN RGNL (JLN)

JOPLIN, MISSOURI

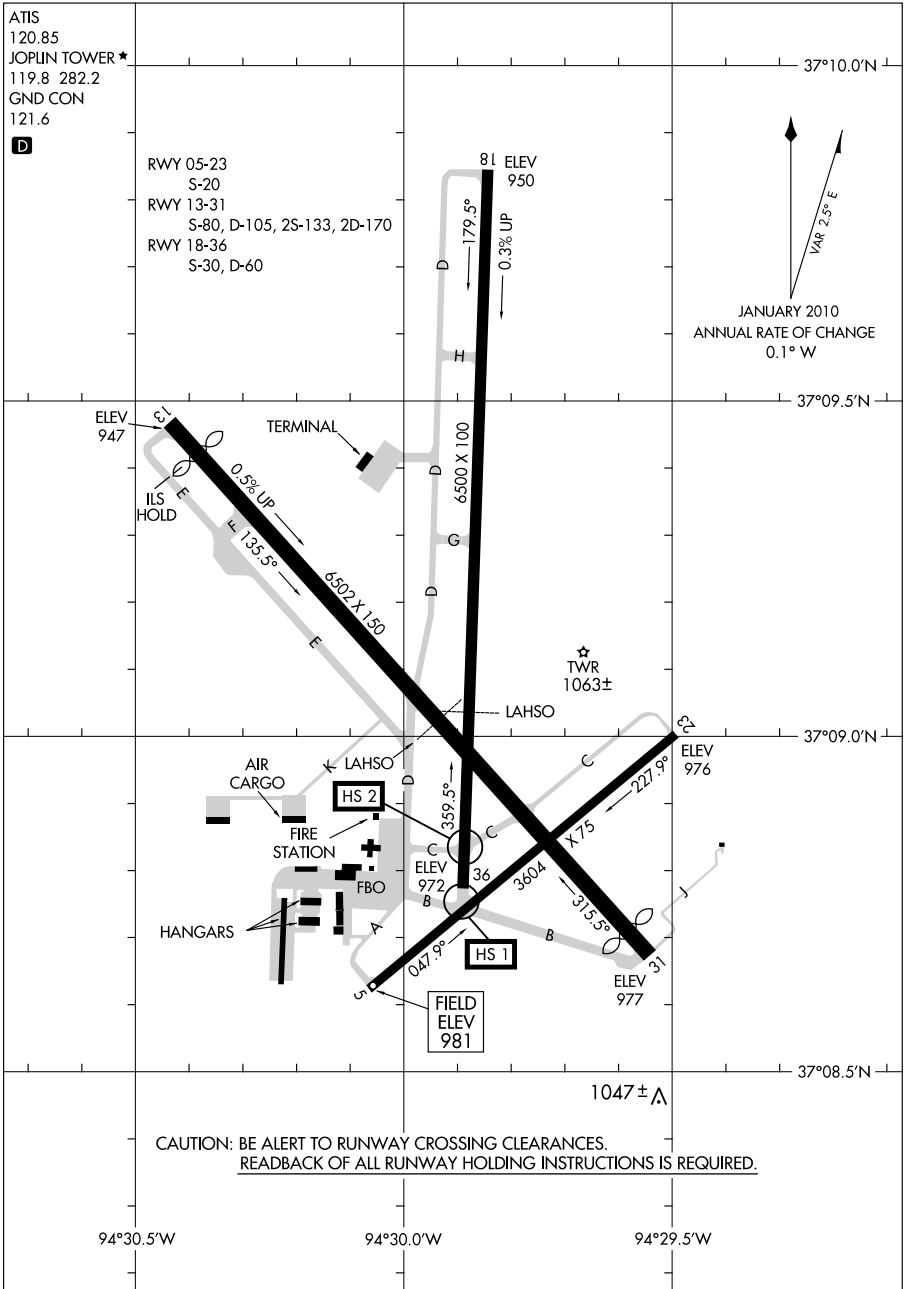

AIRPORT DIAGRAM

10266

JOPLIN, MISSOURI

JOPLIN RGNL (JLN)


NC. 23 SEP 2010 to 18 NOV 2010

10210
AIRPORT DIAGRAM

AL-5765 (FAA)

KAISER/LEE C. FINE MEMORIAL (AIZ)
KAISER/LAKE OZARK, MISSOURI

AWOS-3
135.325
CTAF/UNICOM
122.8

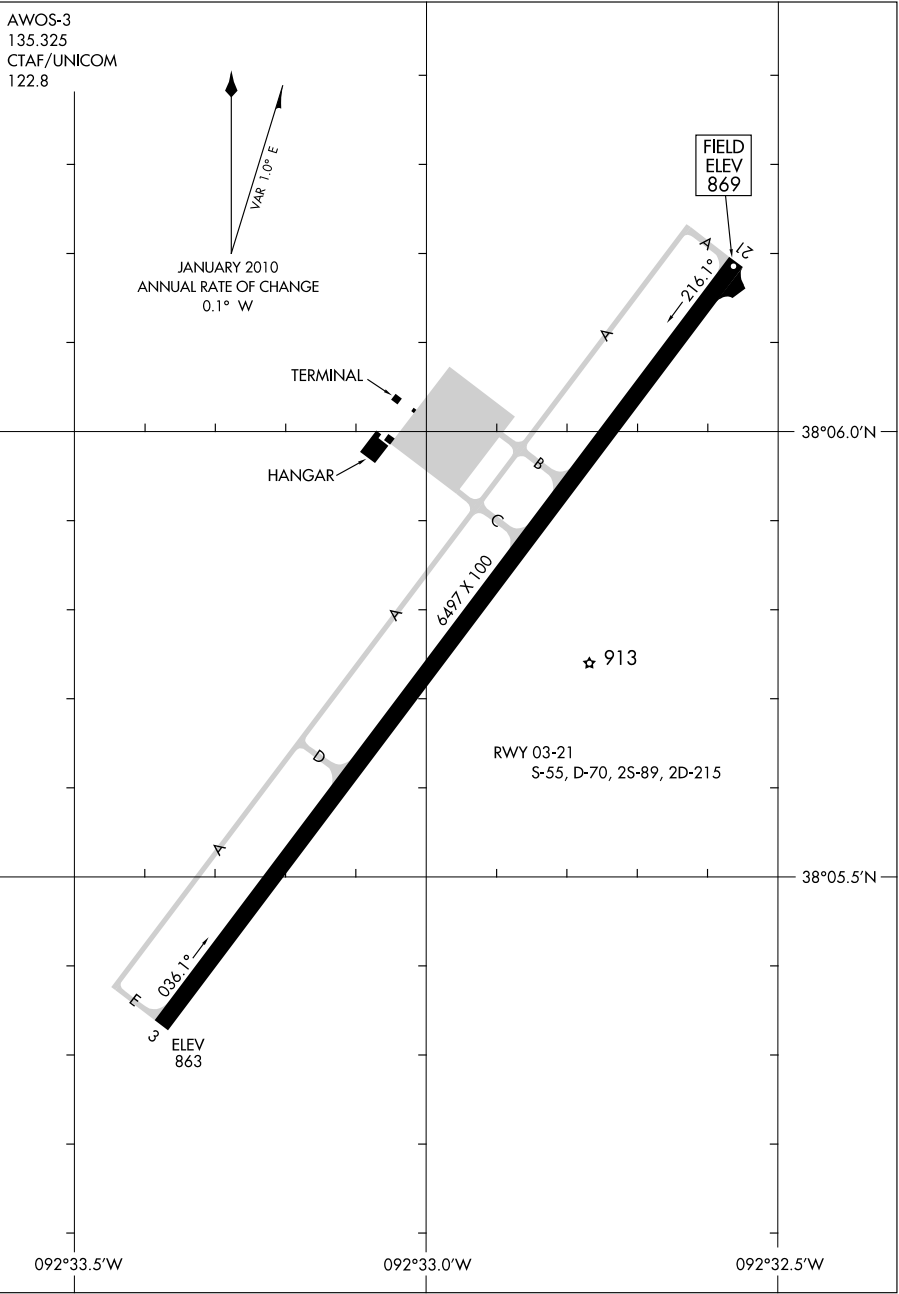

AIRPORT DIAGRAM

KAISER/LAKE OZARK, MISSOURI
KAISER/LEE C. FINE MEMORIAL (AIZ)

AIRPORT DIAGRAM

KANSAS CITY, MISSOURI




KANSAS CITY, MISSOURI

NC, 23 SEP 2010 to 18 NOV 2010

AIRPORT DIAGRAM

KANSAS CITY INTL (MCI)
KANSAS CITY, MISSOURI

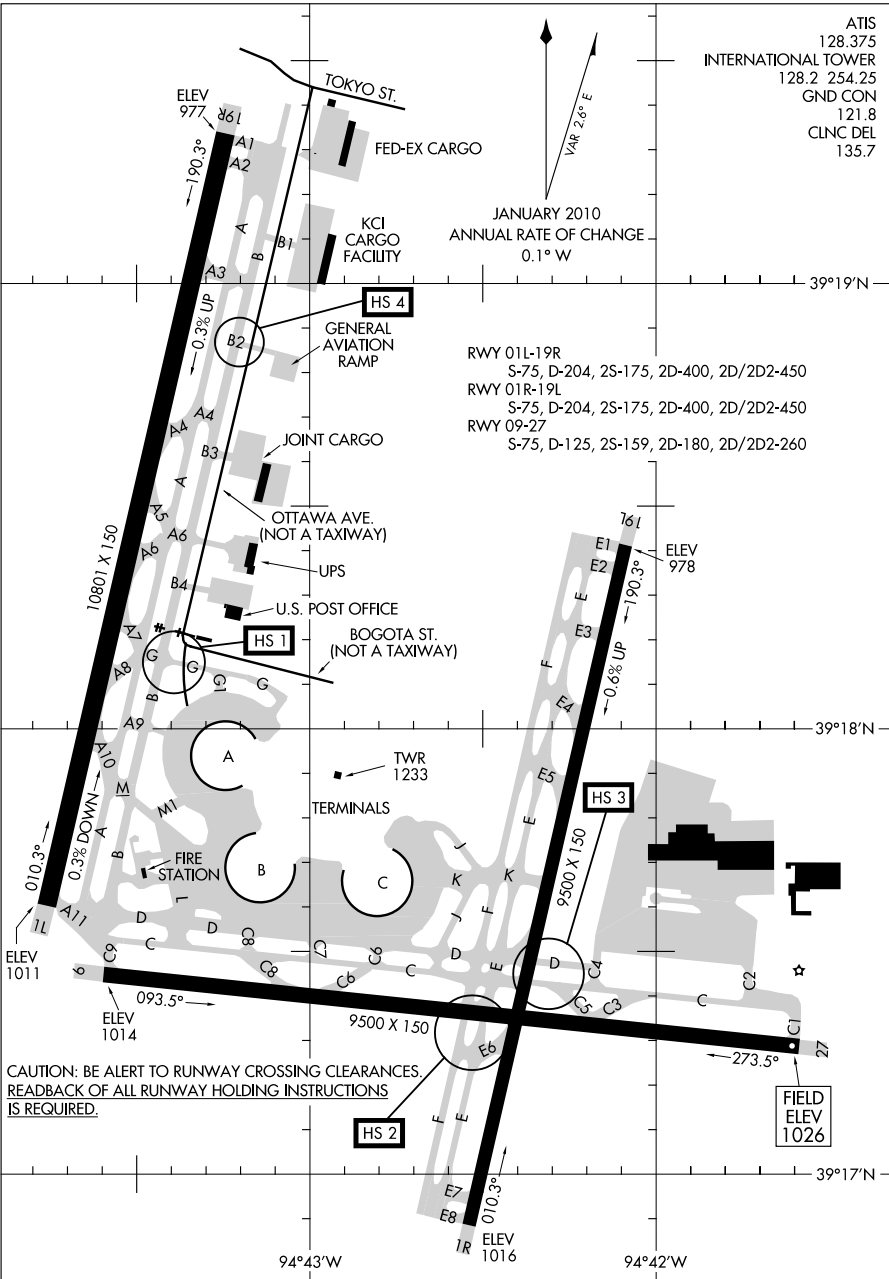

AIRPORT DIAGRAM


KANSAS CITY, MISSOURI
KANSAS CITY INTL (MCI)

10210

AIRPORT DIAGRAM

AL-541 (FAA)

KEARNEY RGNL (EAR)
KEARNEY, NEBRASKA

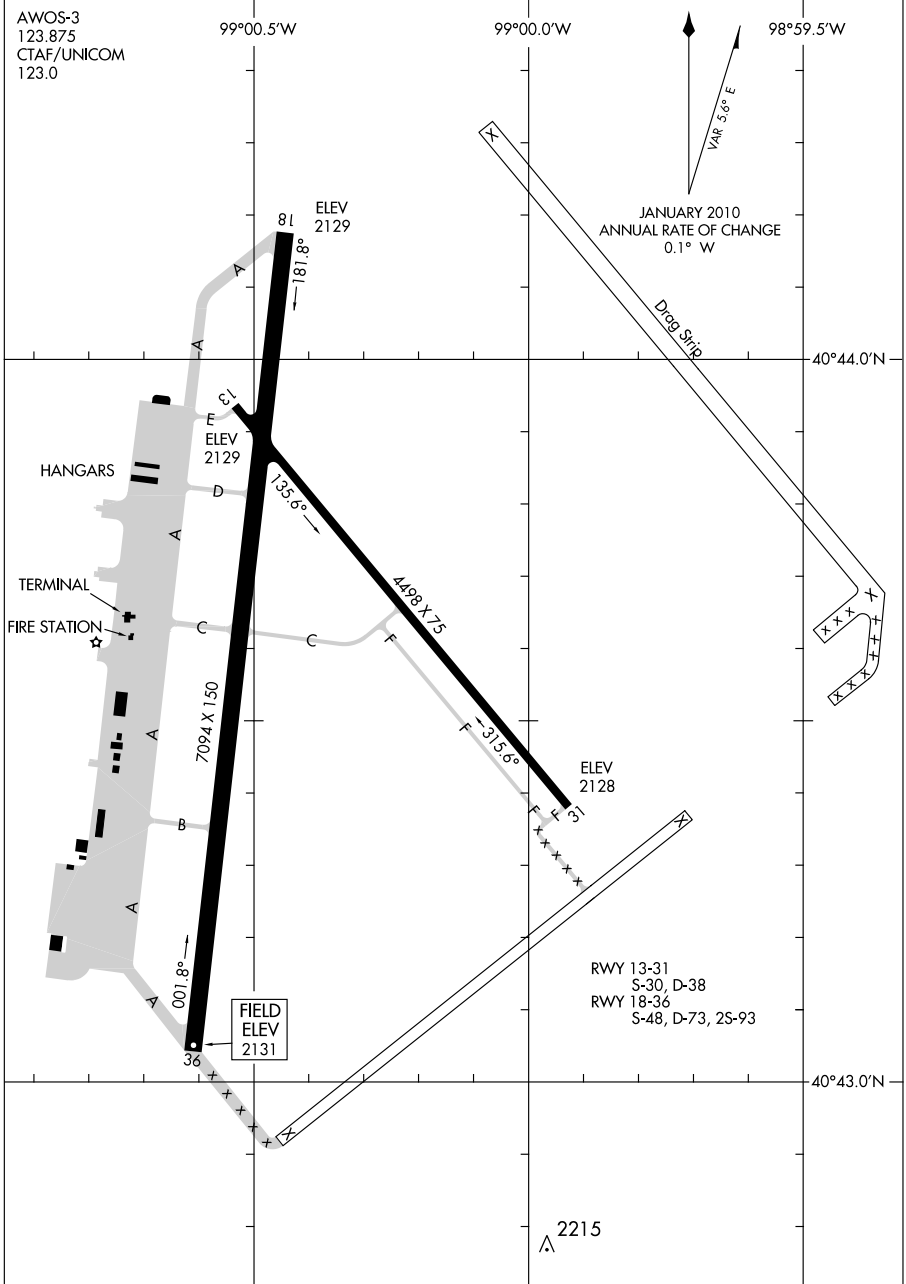

AIRPORT DIAGRAM


10210

KEARNEY, NEBRASKA
KEARNEY RGNL (EAR)

NC. 23 SEP 2010 to 18 NOV 2010

10266

AIRPORT DIAGRAM

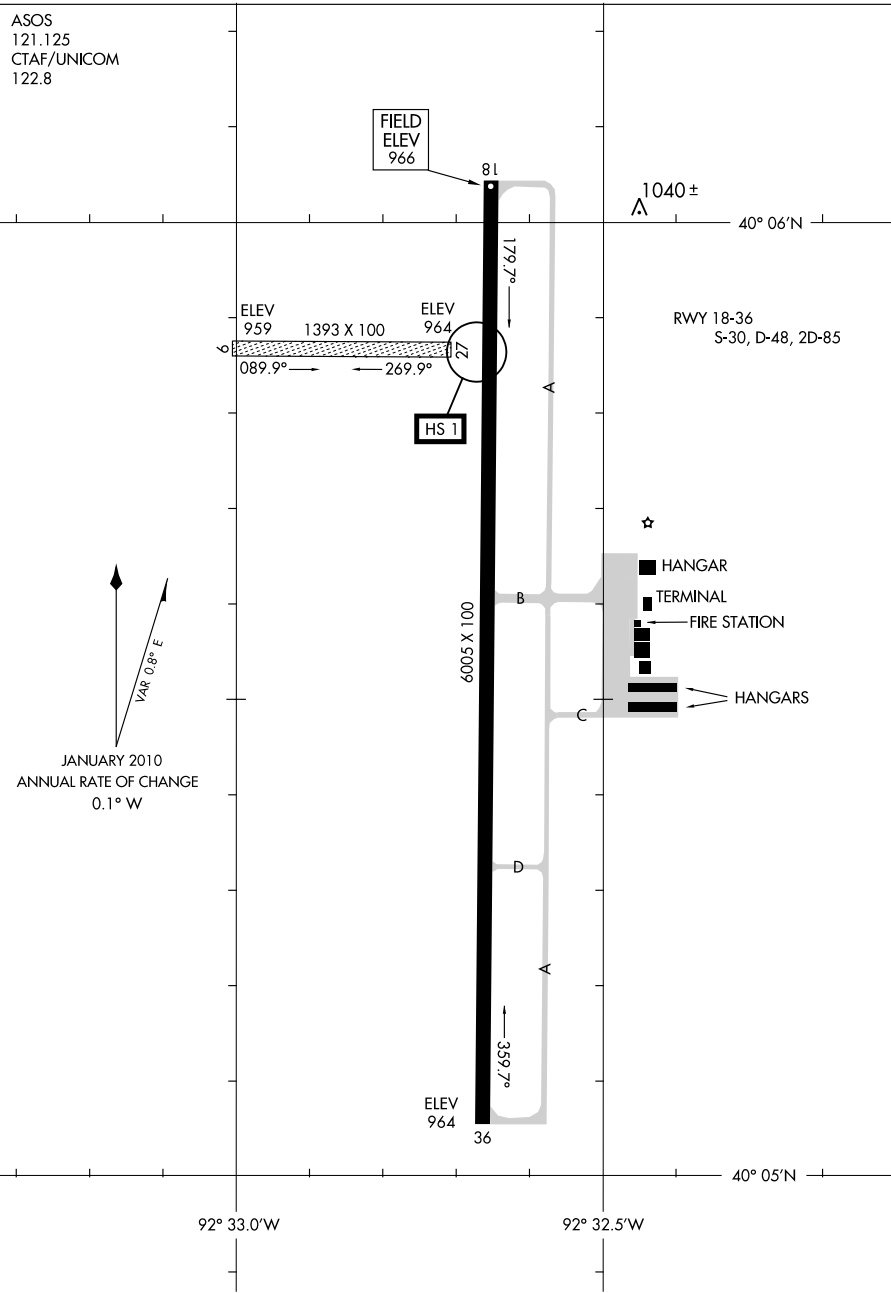


10210

AIRPORT DIAGRAM

AL-5481 (FAA)

LAWRENCE MUNI (LWC)
LAWRENCE, KANSAS

ASOS
121.225
CTAF/UNICOM
123.0

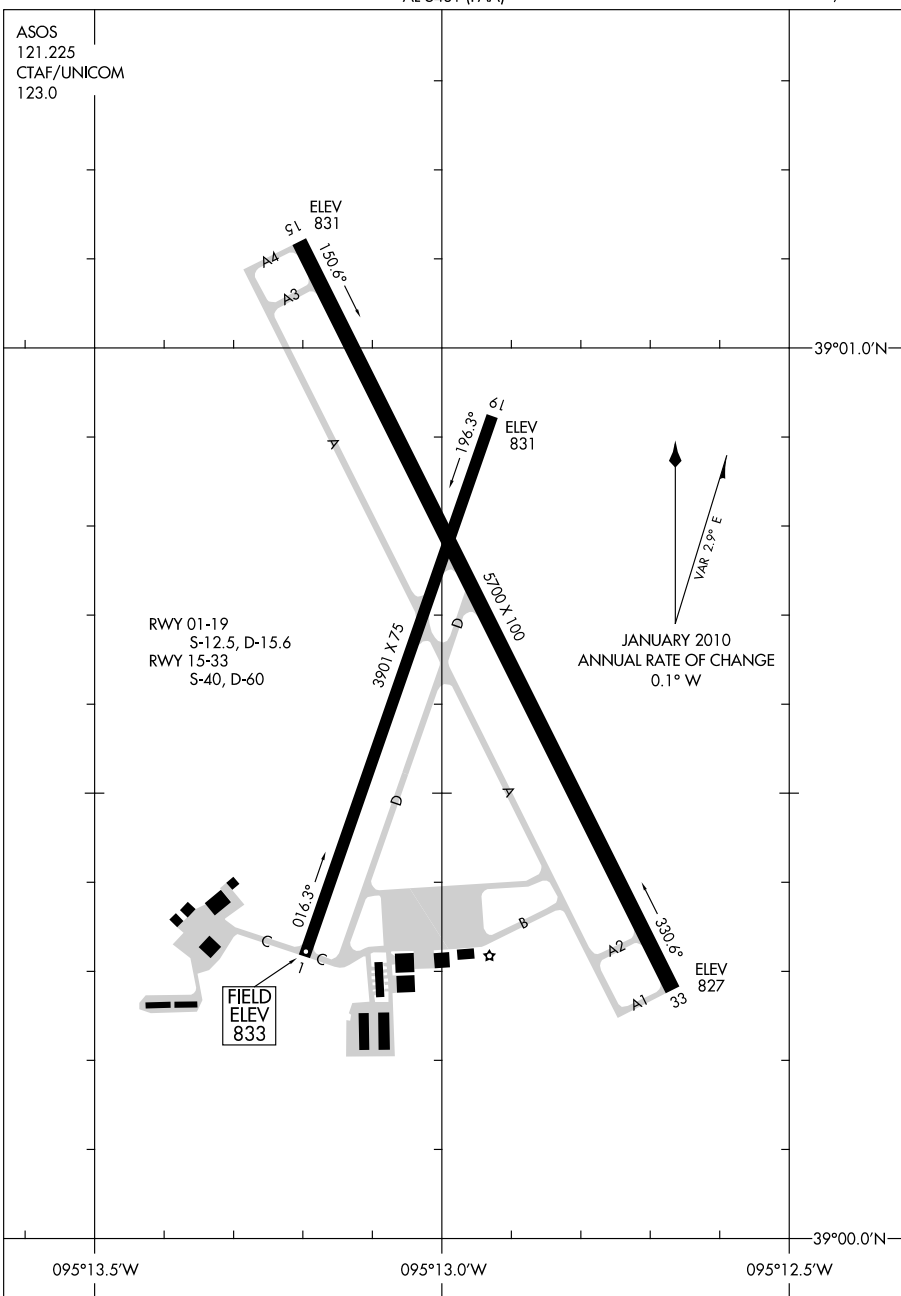

AIRPORT DIAGRAM


10210

LAWRENCE, KANSAS
LAWRENCE MUNI (LWC)

10210
AIRPORT DIAGRAM

AL-6104 (FAA)

LEE'S SUMMIT MUNI (LXT)
LEE'S SUMMIT, MISSOURI

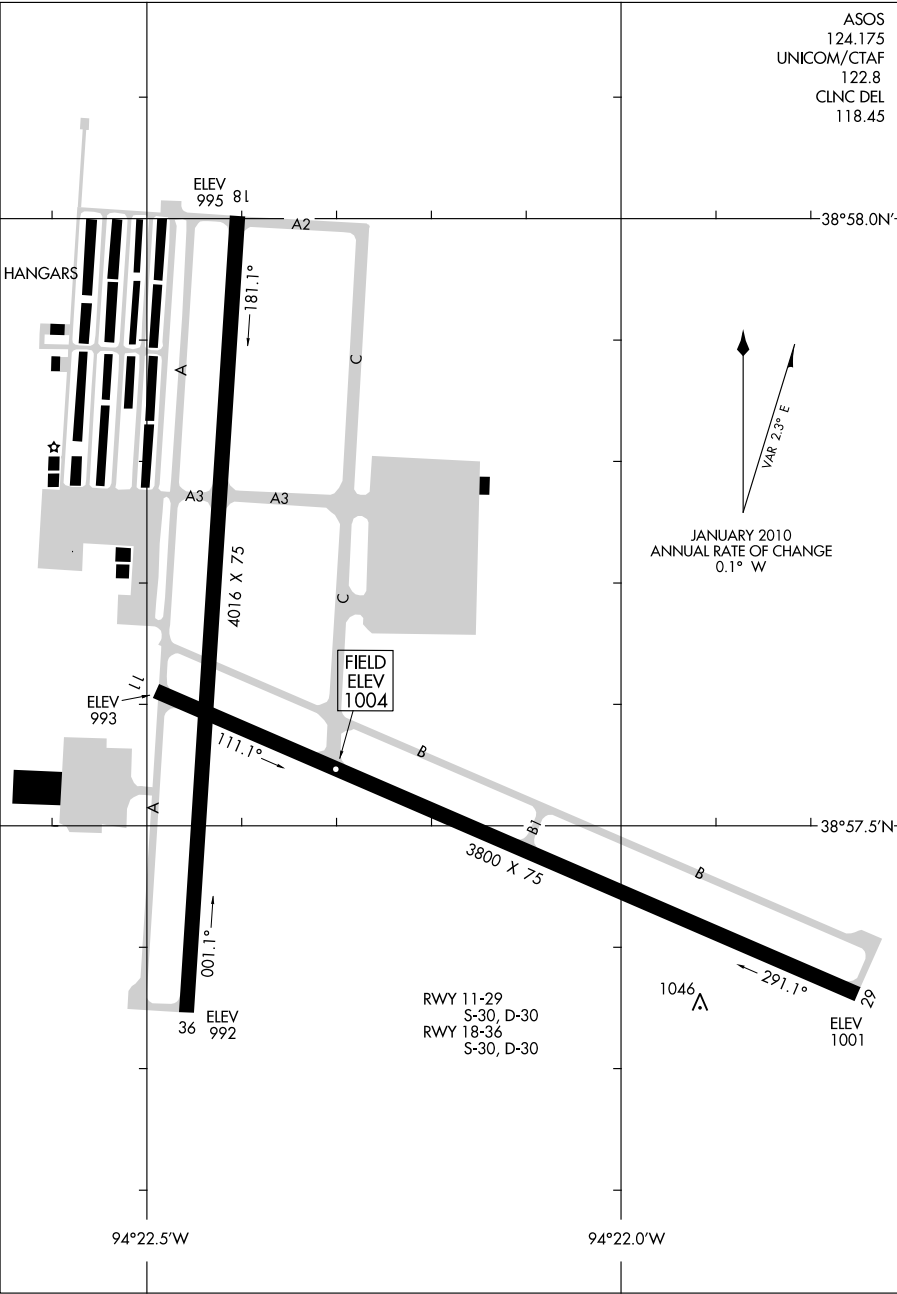


AIRPORT DIAGRAM
10210

LEE'S SUMMIT, MISSOURI
LEE'S SUMMIT MUNI (LXT)

LIBERAL, KANSAS

LIBERAL, KANSAS
LIBERAL MID-AMERICA RGNL (LBL)

NC, 23 SEP 2010 to 18 NOV 2010

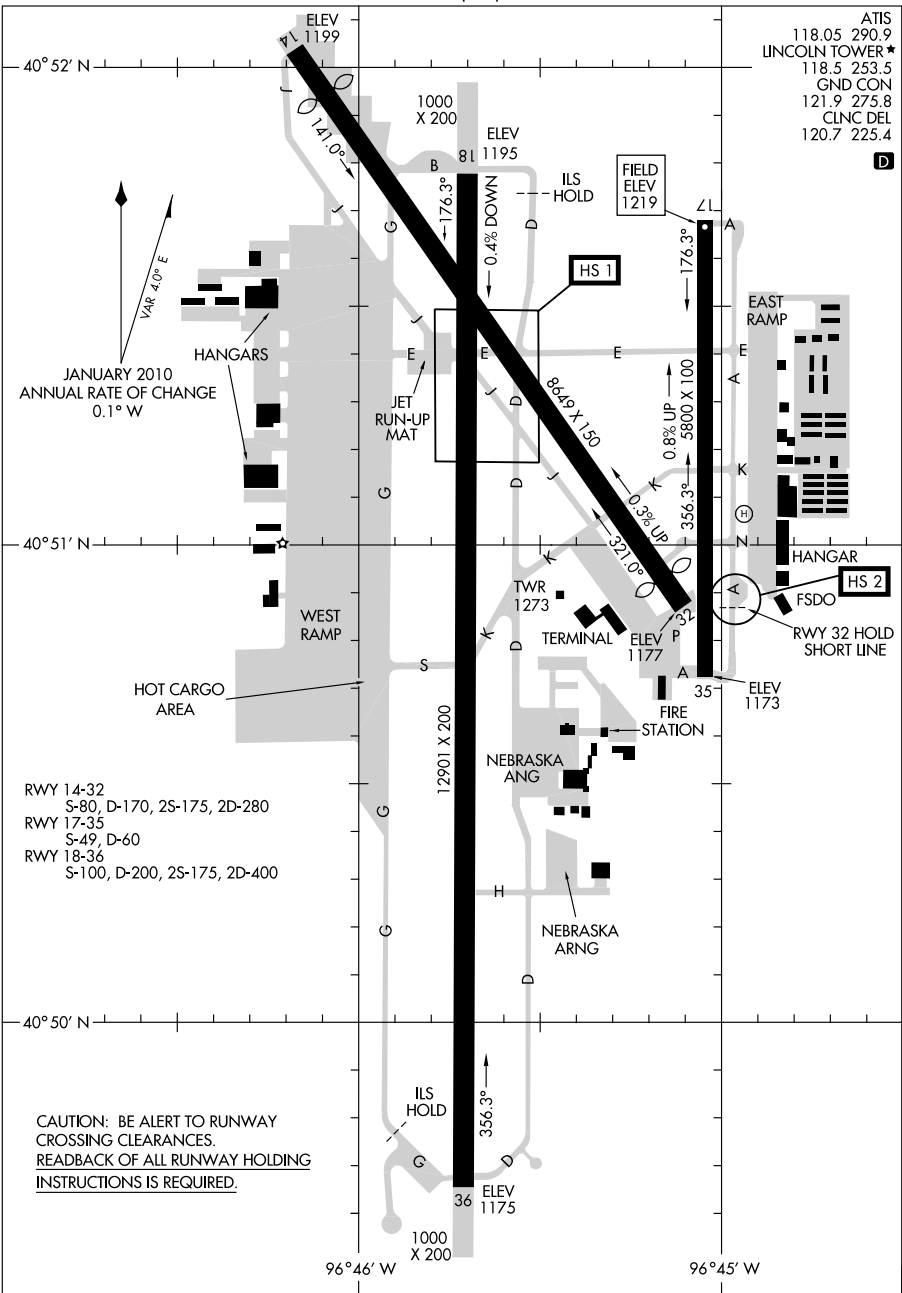


10266

AIRPORT DIAGRAM

AL-5241 (FAA)

MANHATTAN RGNL (MHK)

MANHATTAN, KANSAS

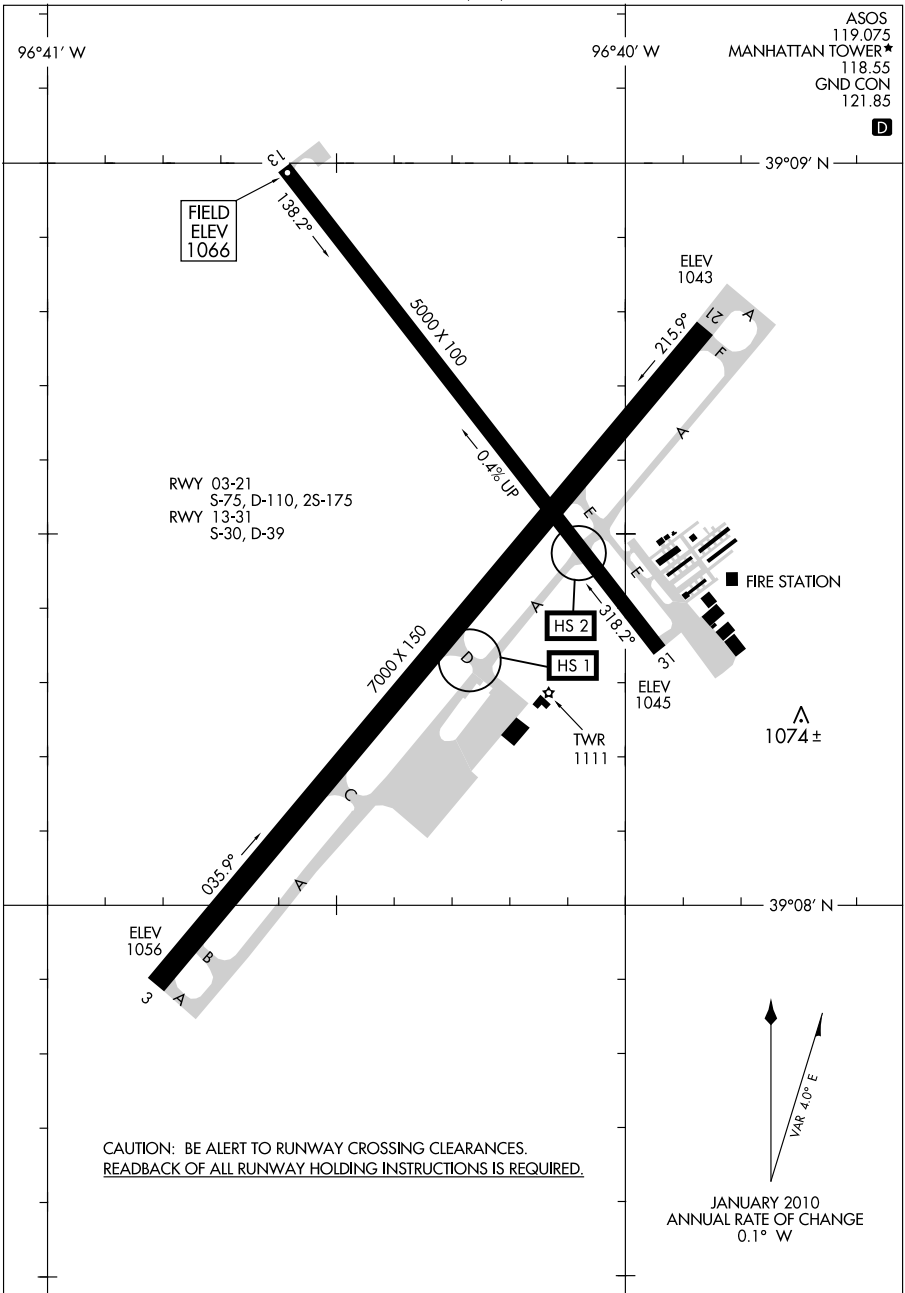

AIRPORT DIAGRAM

10266

MANHATTAN, KANSAS

MANHATTAN RGNL (MHK)

10210


AIRPORT DIAGRAM

AL-6585 (FAA)

MAPLE LAKE MUNI (MGG)

MAPLE LAKE, MINNESOTA

AWOS-3
128.325
CTAF/UNICOM
122.8

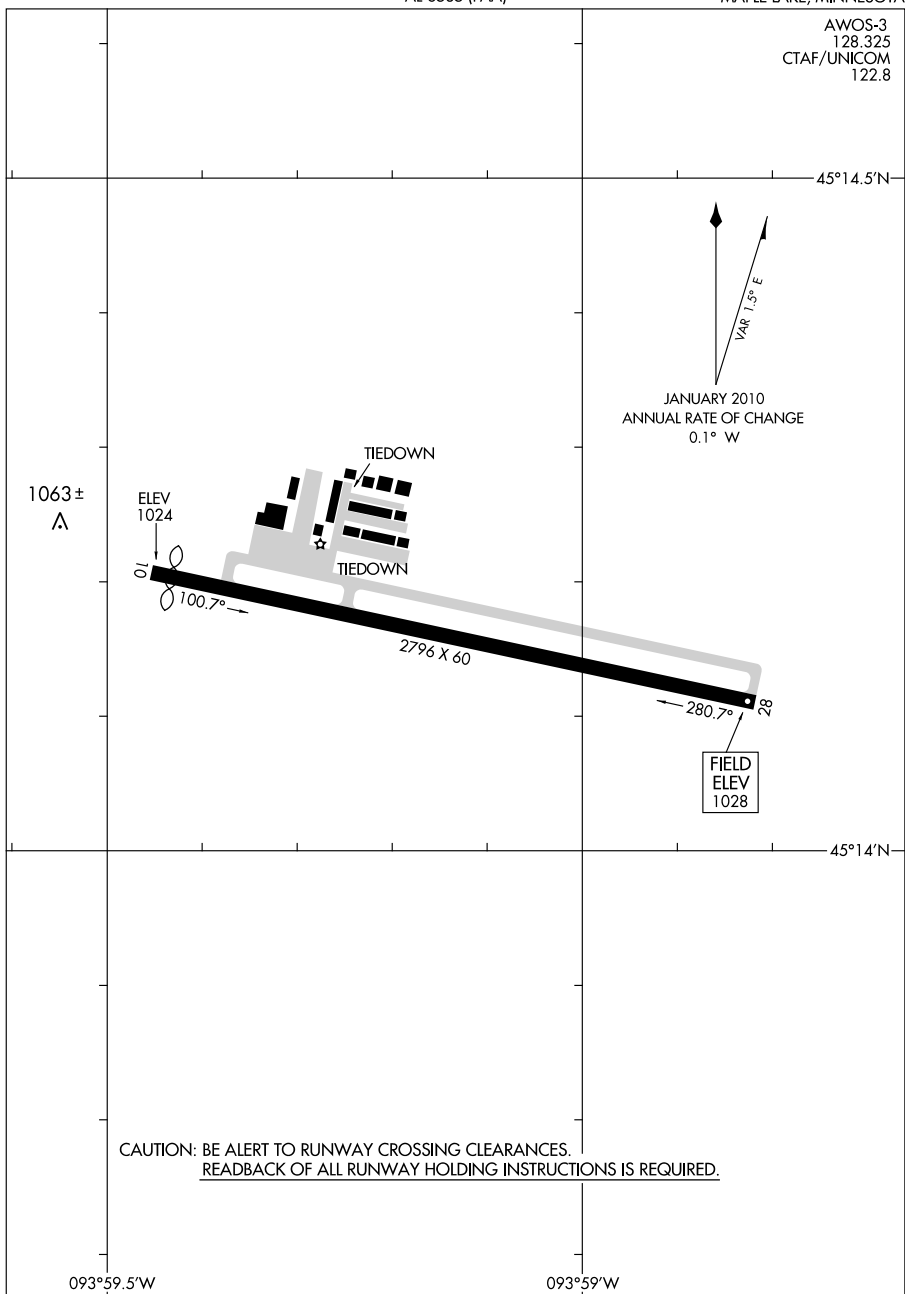

AIRPORT DIAGRAM

10210

MAPLE LAKE, MINNESOTA


MAPLE LAKE MUNI (MGG)

10266

AIRPORT DIAGRAM

AL-667 (FAA)

MASON CITY MUNI (MCW)
MASON CITY, IOWA

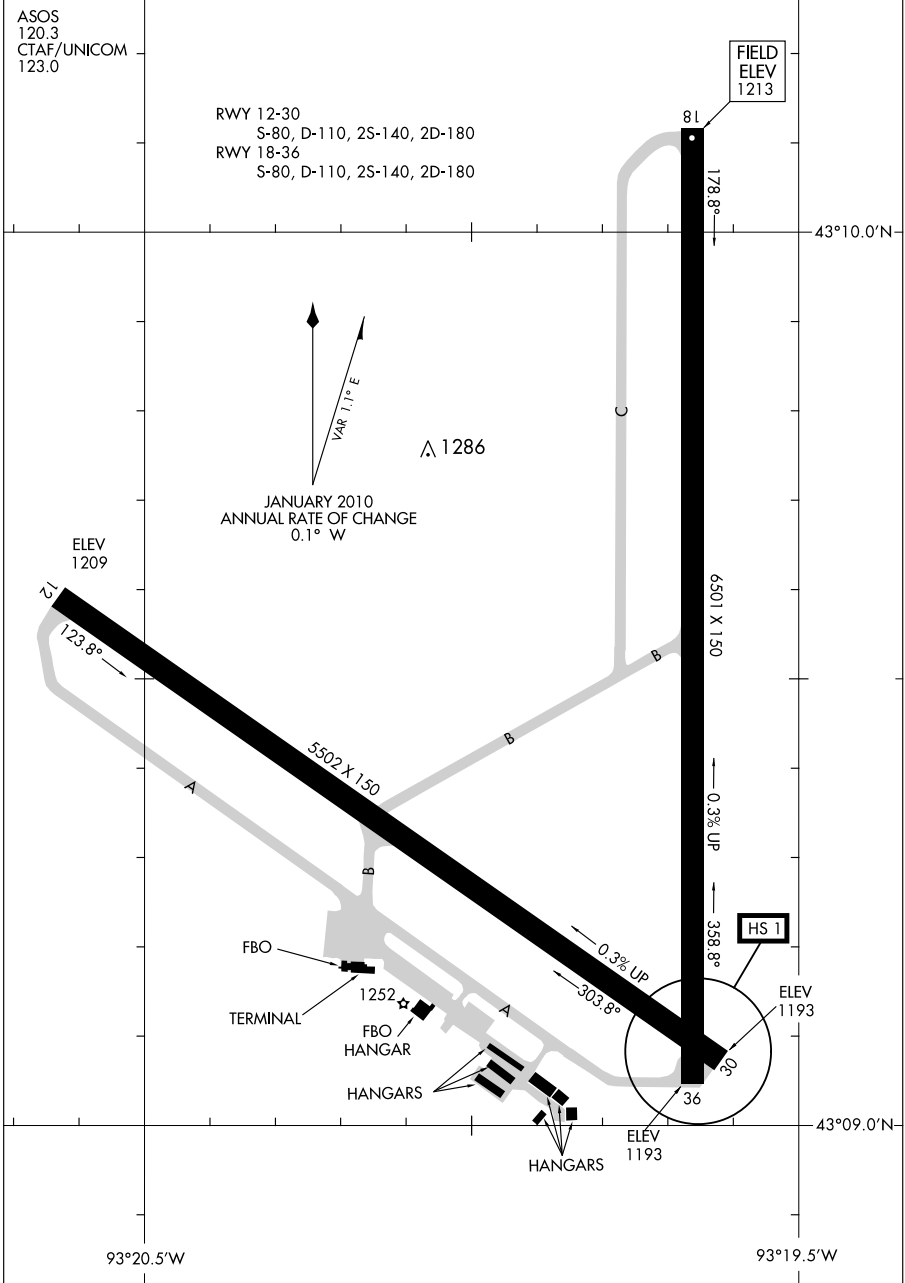

AIRPORT DIAGRAM

10266

MASON CITY, IOWA
MASON CITY MUNI (MCW)

NC. 23 SEP 2010 to 18 NOV 2010

10210

AIRPORT DIAGRAM


AL-5301 (FAA)

MC COOK BEN NELSON RGNL (MCK)

MC COOK, NEBRASKA

ASOS
119.025
CTAF/UNICOM
122.8

D

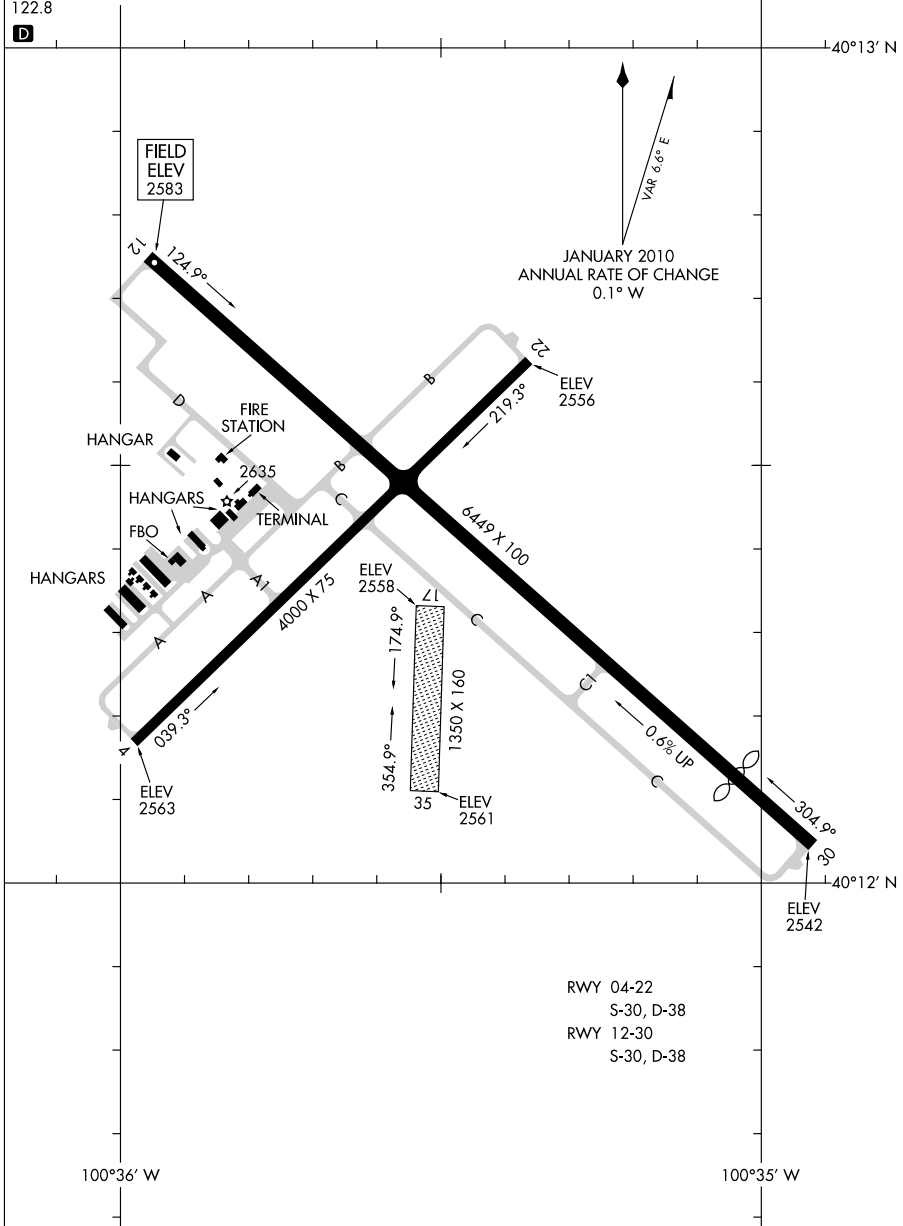

AIRPORT DIAGRAM

10210


MC COOK, NEBRASKA

MC COOK BEN NELSON RGNL (MCK)

NC, 23 SEP 2010 to 18 NOV 2010

AIRPORT DIAGRAM

10210 MINNEAPOLIS/ANOKA COUNTY- BLAINE AIRPORT (JANES FIELD) (ANE)
AL-5202 (FAA) MINNEAPOLIS, MINNESOTA

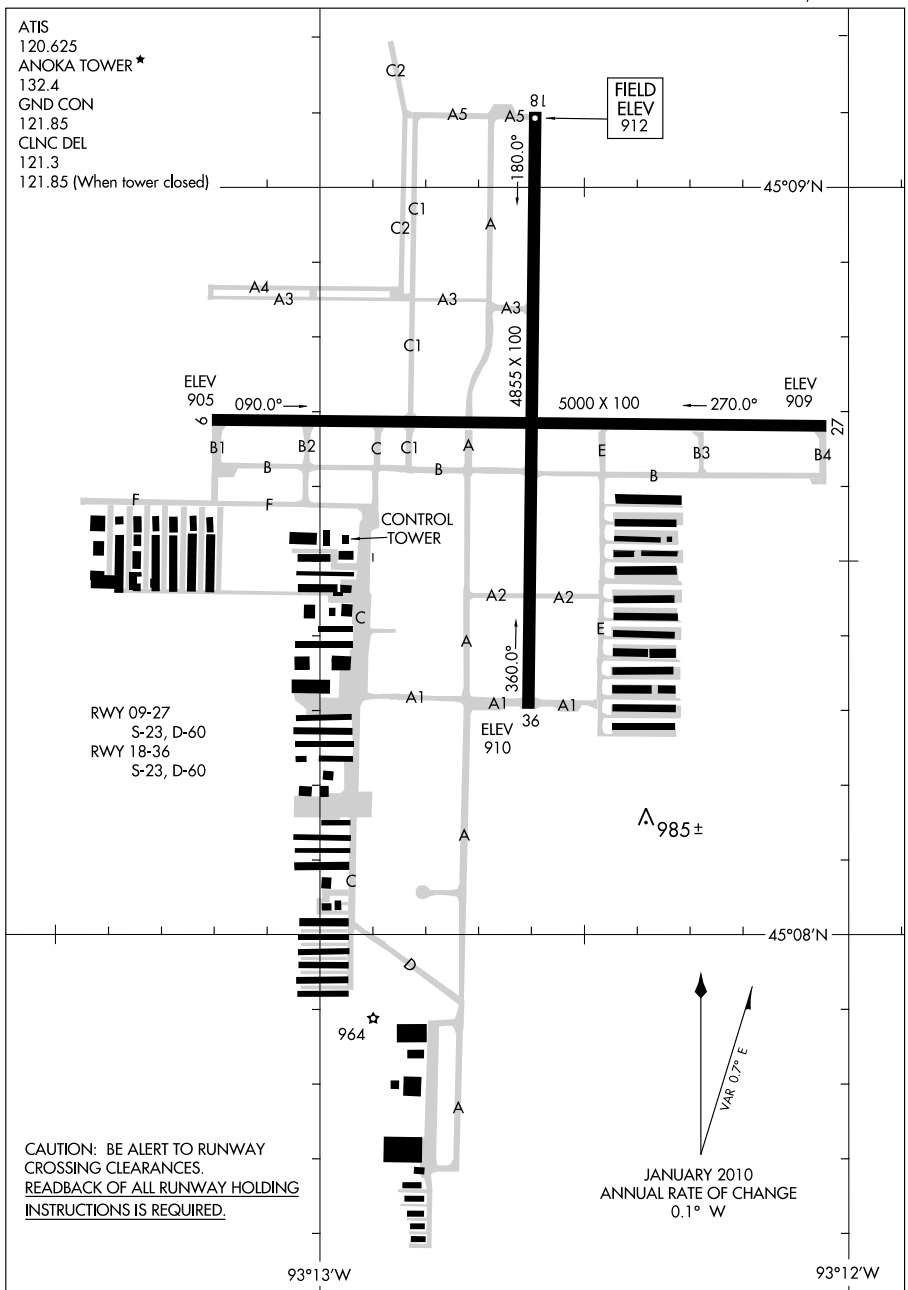

AIRPORT DIAGRAM

10210 MINNEAPOLIS/ANOKA COUNTY- BLAINE AIRPORT (JANES FIELD) (ANE)
MINNEAPOLIS, MINNESOTA

10266

AIRPORT DIAGRAM

AL-5158 (FAA)

MINNEAPOLIS/CRYSTAL (MIC)

MINNEAPOLIS, MINNESOTA

ATIS
 124.475
 CRYSTAL TOWER ★
 120.7
 GND CON
 121.6
 CLNC DEL
 121.6 (When Tower Closed)

JANUARY 2010
ANNUAL RATE OF CHANGE
0.1° W

45°04.0'N

45°03.5'N

93°21.5'W

93°21.0'W

RWY 06L-24R
S-12.5, D-25
RWY 14L-32R
S-13, D-25
RWY 14R-32L
S-13, D-25

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

$$|\Lambda_{1011}|$$

AIRPORT DIAGRAM

10266

MINNEAPOLIS, MINNESOTA
MINNEAPOLIS/CRYSTAL (MIC)

NC, 23 SEP 2010 to 18 NOV 2010


AIRPORT DIAGRAM

AL-5094 (FAA)

MINNEAPOLIS/ FLYING CLOUD (FCM)
MINNEAPOLIS, MINNESOTA

ATIS	124.9
FLYING CLOUD TOWER ★	119.15
GND CON	121.7
CLNC DEL	121.7 (When Tower Closed)

JANUARY 2010
ANNUAL RATE OF CHANGE
0.1° W

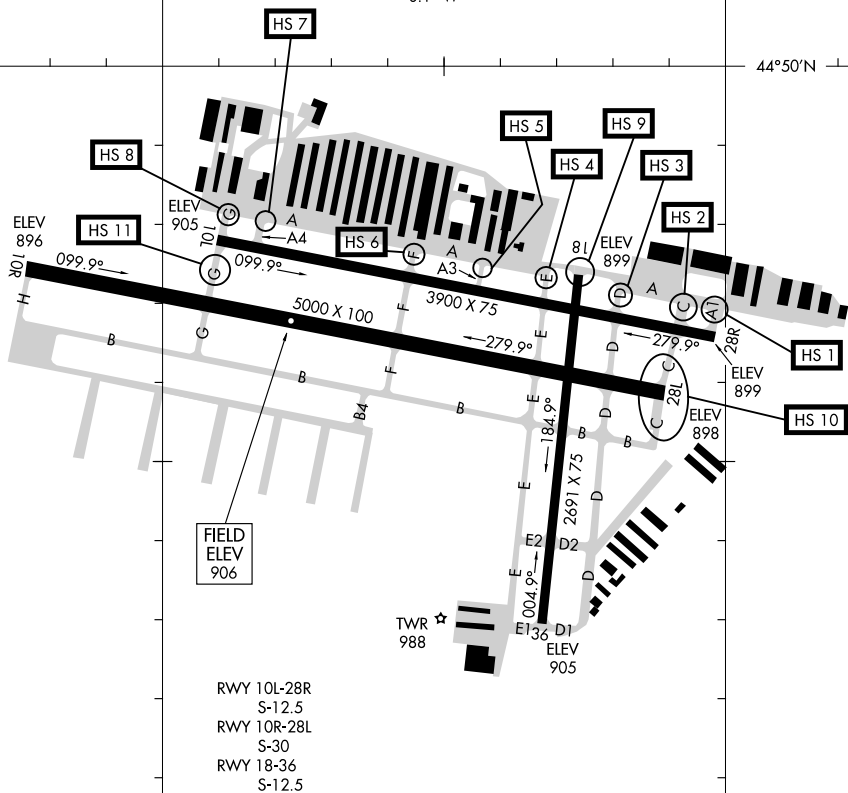

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

93°28'W

93°27'W

AIRPORT DIAGRAM


MINNEAPOLIS, MINNESOTA
MINNEAPOLIS/ FLYING CLOUD (FCM)


10266

AIRPORT DIAGRAM

MINNEAPOLIS-ST PAUL INTL/WOLD-CHAMBERLAIN (MSP)
AL-264 (FAA)

MINNEAPOLIS, MINNESOTA

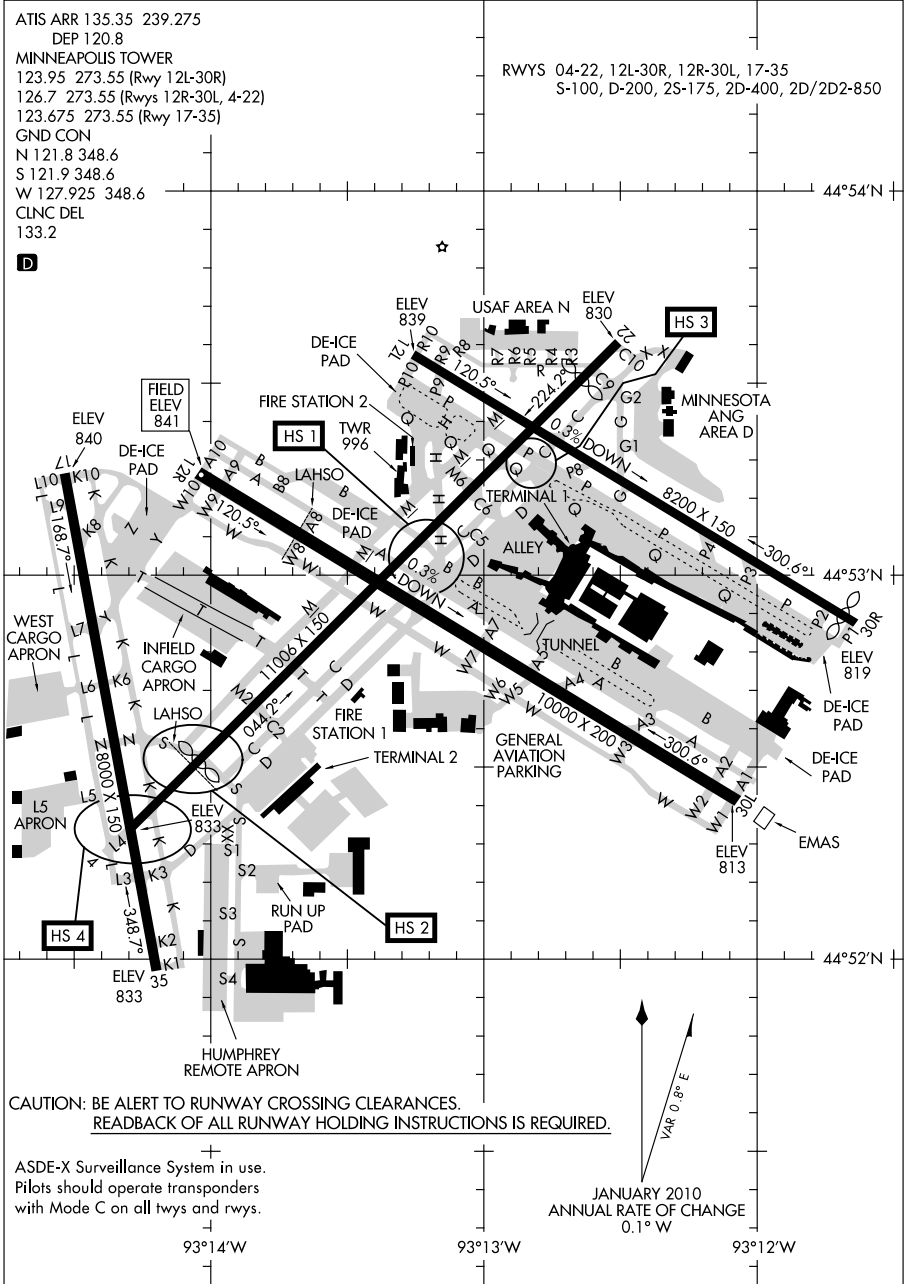

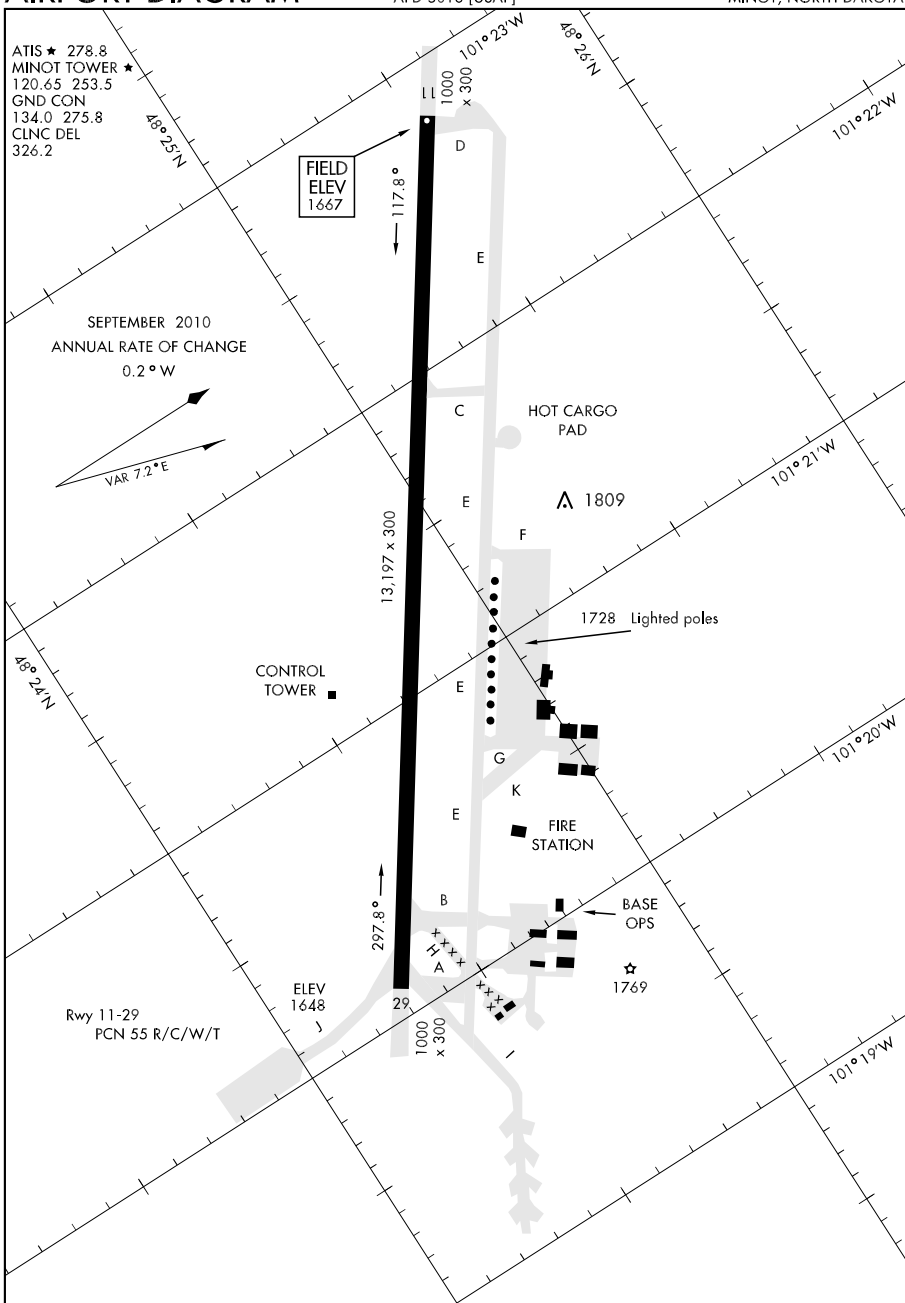


10210

AIRPORT DIAGRAM

AL-635 (FAA)

MINOT INTL (MOT)
MINOT, NORTH DAKOTA

MAGIC CITY TOWER ★
118.2 393.1
GND CON
121.9 393.1

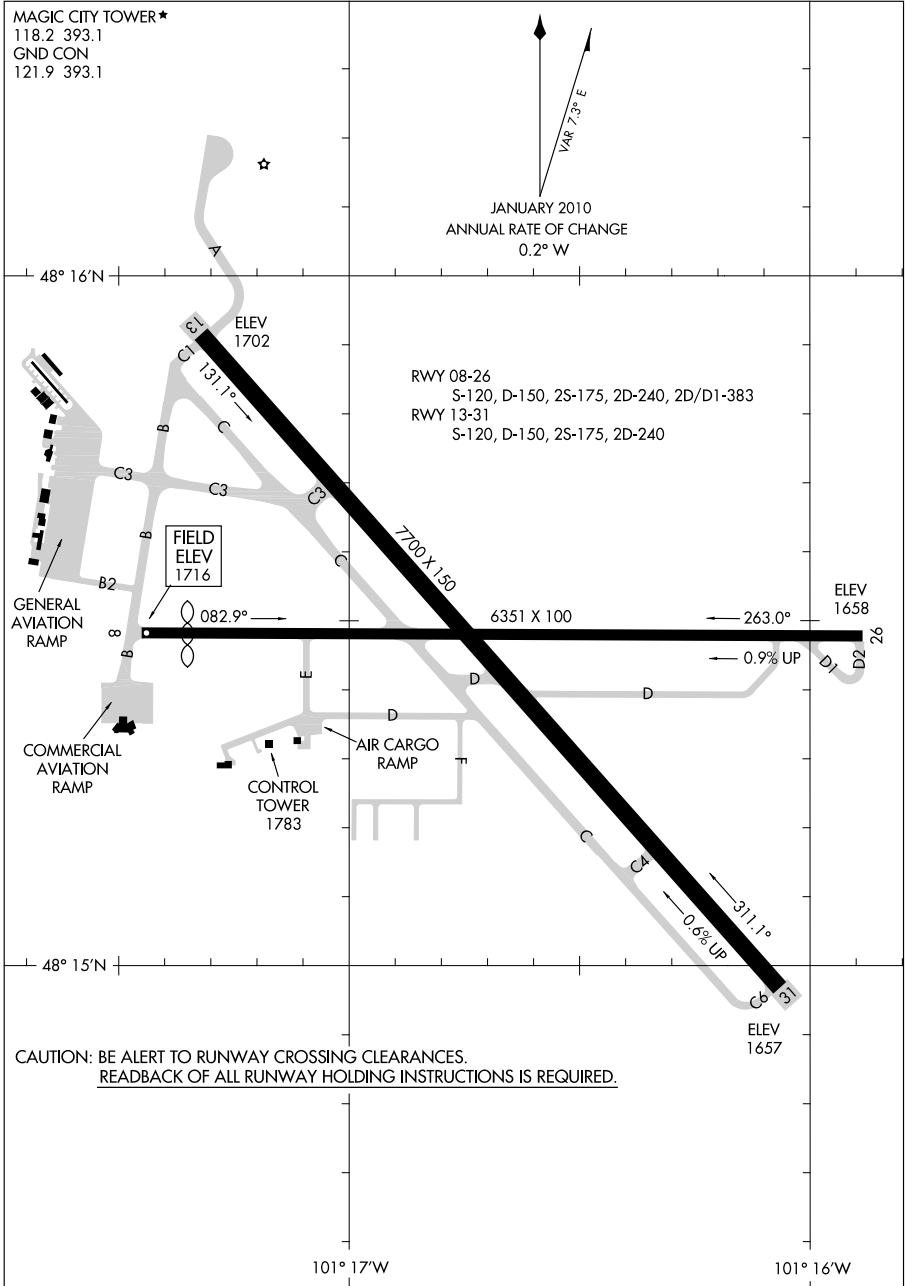

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.


AIRPORT DIAGRAM

10210

MINOT, NORTH DAKOTA
MINOT INTL (MOT)

10210
AIRPORT DIAGRAM

NORFOLK/KARL STEFAN MEMORIAL (OFK)
NORFOLK, NEBRASKA

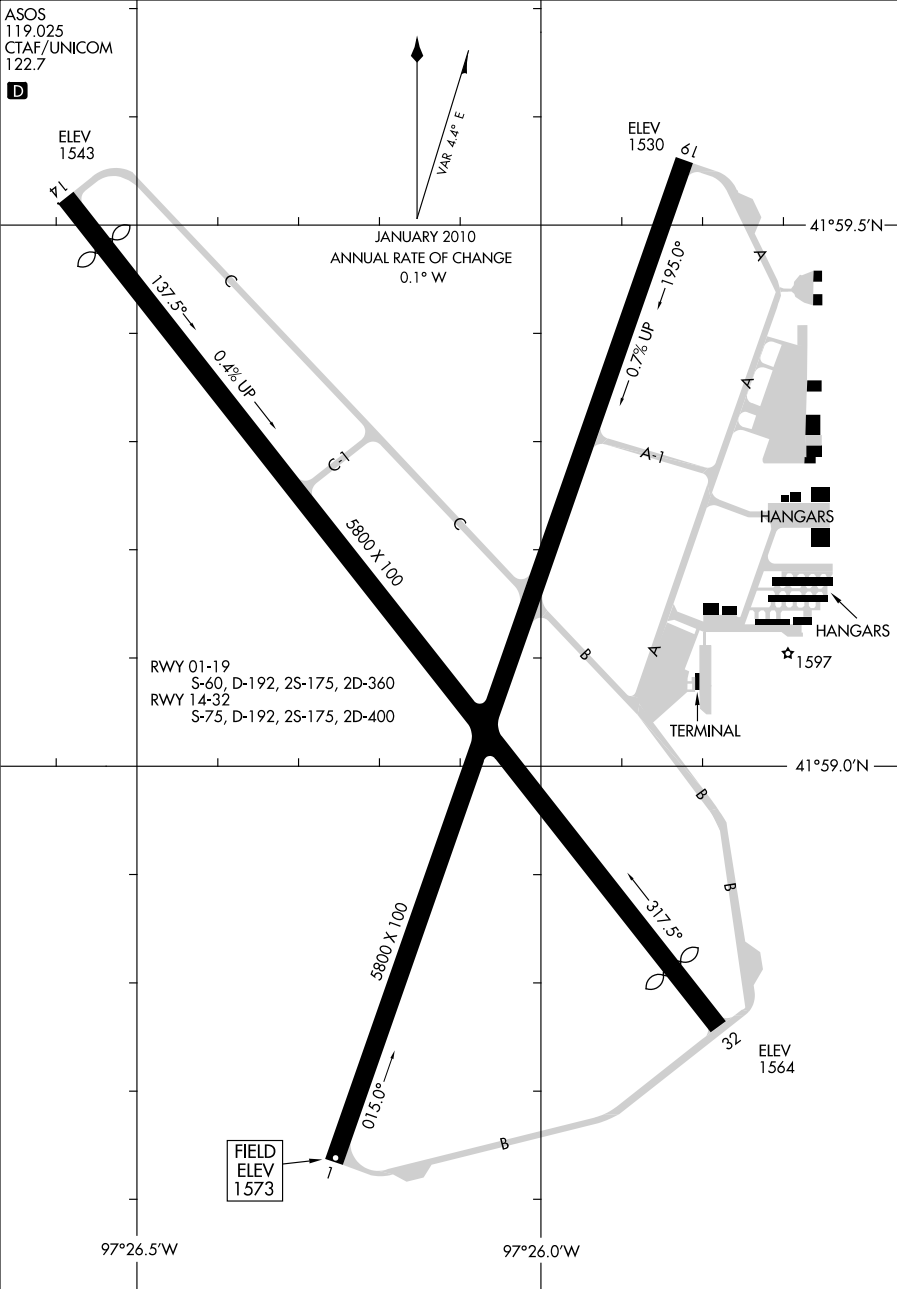


AIRPORT DIAGRAM
10210

NORFOLK, NEBRASKA
NORFOLK/KARL STEFAN MEMORIAL (OFK)

10210

AIRPORT DIAGRAM

NORTH PLATTE RGNL AIRPORT LEE BIRD FIELD (LBF)
AL-292 (FAA) NORTH PLATTE, NEBRASKA

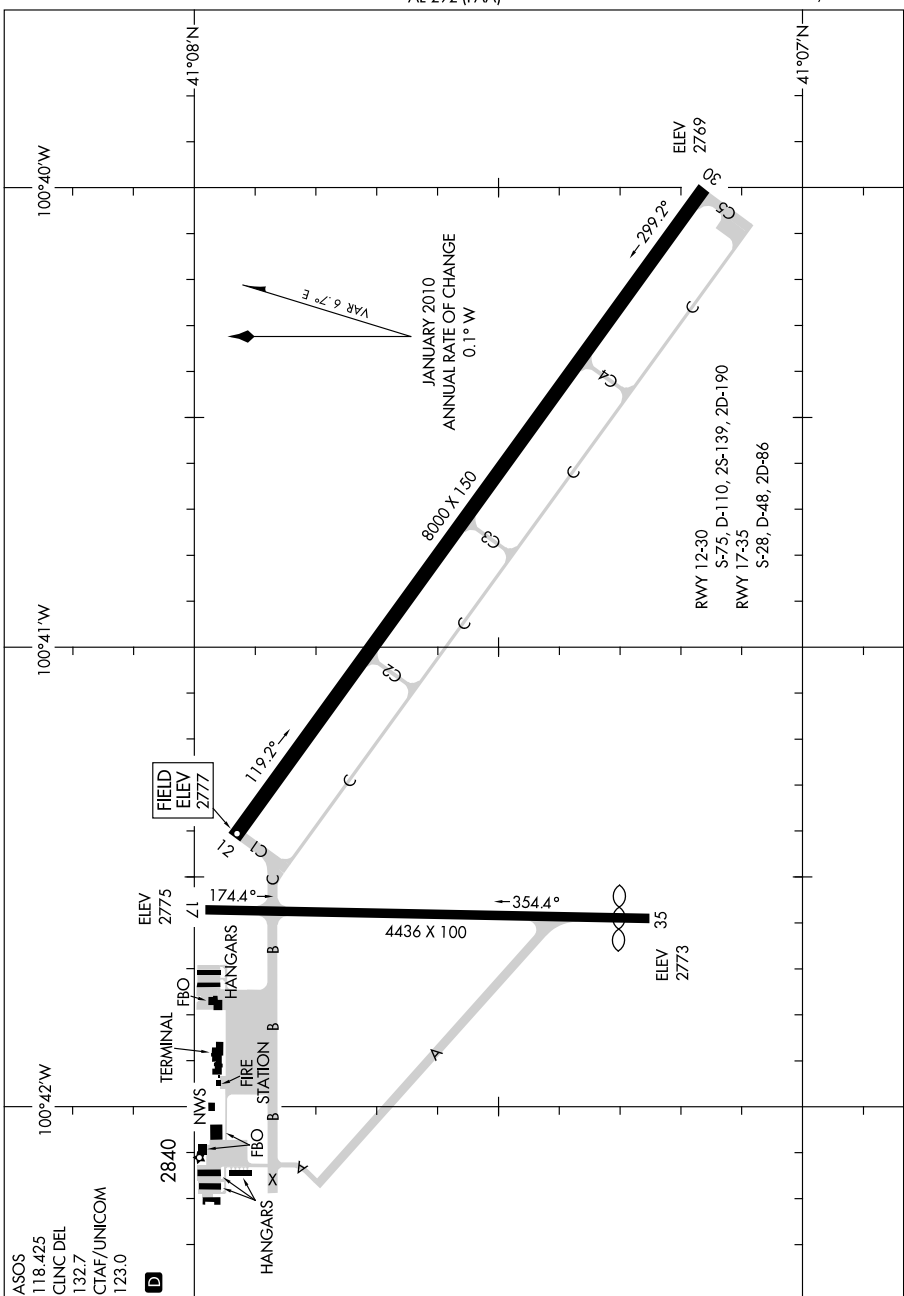

AIRPORT DIAGRAM

NORTH PLATTE, NEBRASKA
NORTH PLATTE RGNL AIRPORT LEE BIRD FIELD (LBF)

10210

NC. 23 SEP 2010 to 18 NOV 2010


10154

OFFUTT AFB (KOFF)

AIRPORT DIAGRAM

AFD-544 [USAF]

OMAHA, NEBRASKA

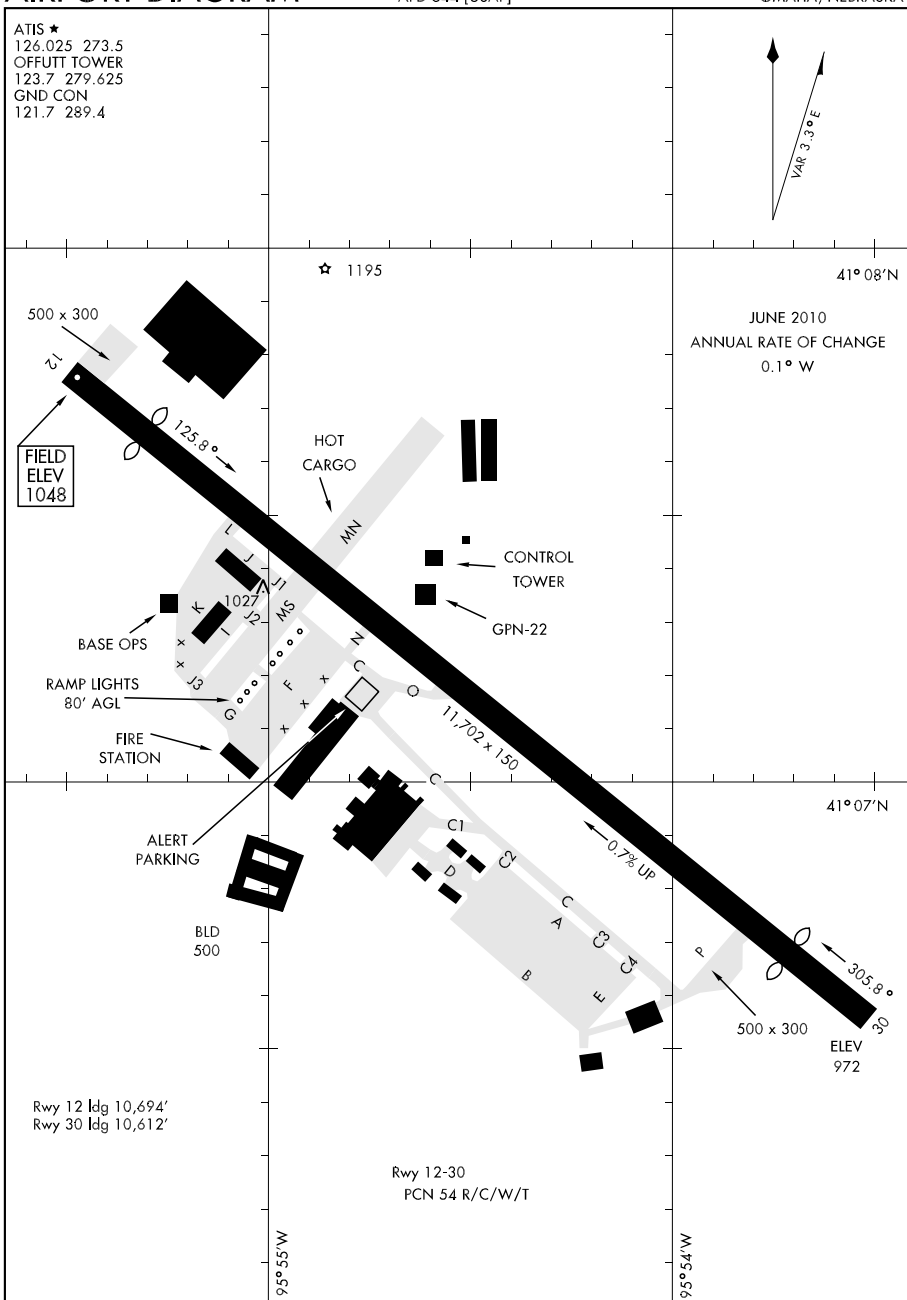

AIRPORT DIAGRAM

OMAHA, NEBRASKA
OFFUTT AFB (KOFF)

NC, 23 SEP 2010 to 18 NOV 2010

OLATHE, KANSAS

94°44.0'W

NC, 23 SEP 2010 to 18 NOV 2010


10266

AIRPORT DIAGRAM

AL-302 (FAA)

OLATHE/NEW CENTURY AIRCENTER (IXD)
OLATHE, KANSAS

OLATHE, KANSAS

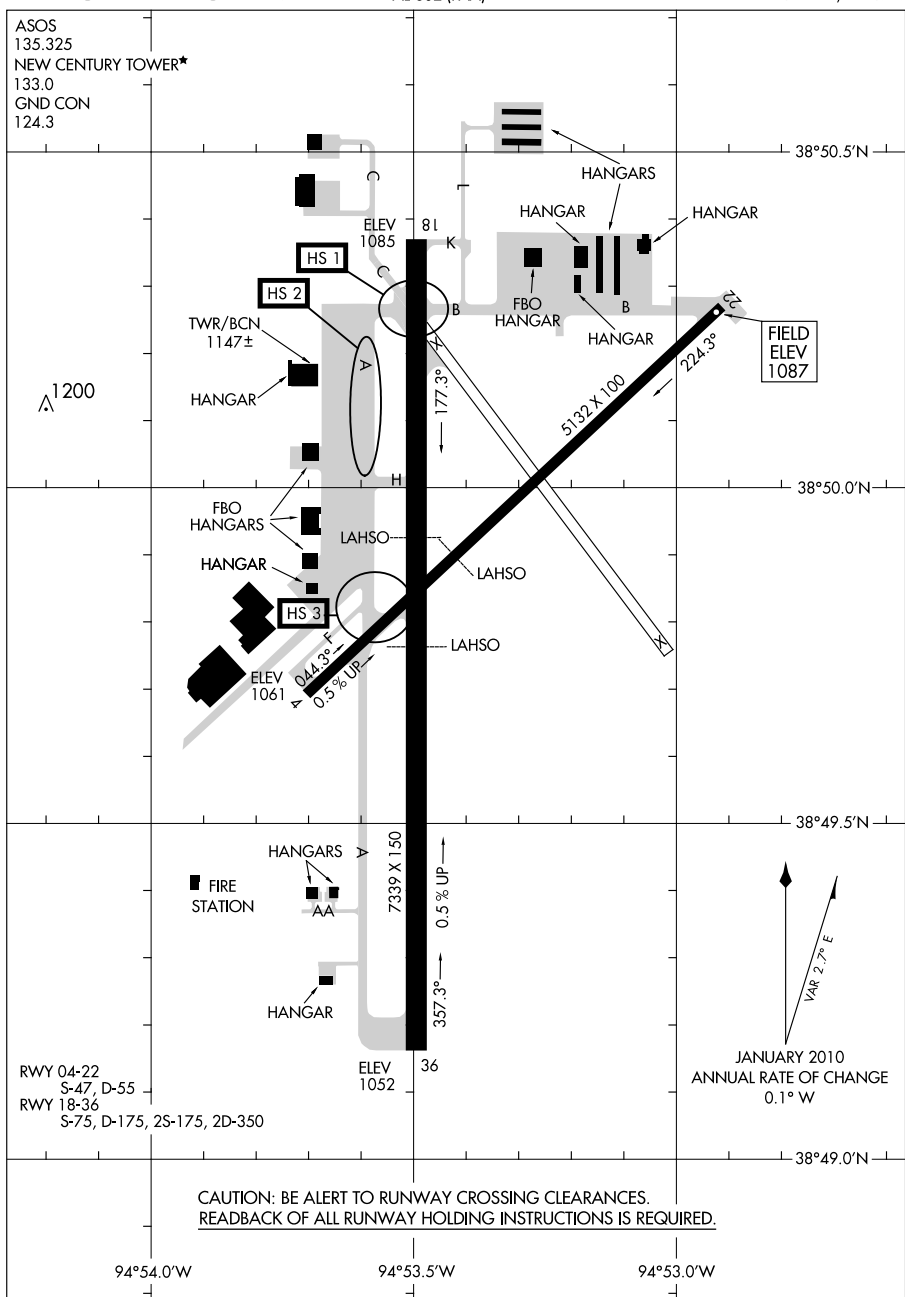

AIRPORT DIAGRAM

OLATHE, KANSAS
OLATHE/NEW CENTURY AIRCENTER (IXD)

OLATHE KANSAS

10266

NC, 23 SEP 2010 to 18 NOV 2010


10266

AIRPORT DIAGRAM

AL-304 (FAA)

OMAHA/EPPLEY AIRFIELD (OMA)

OMAHA, NEBRASKA

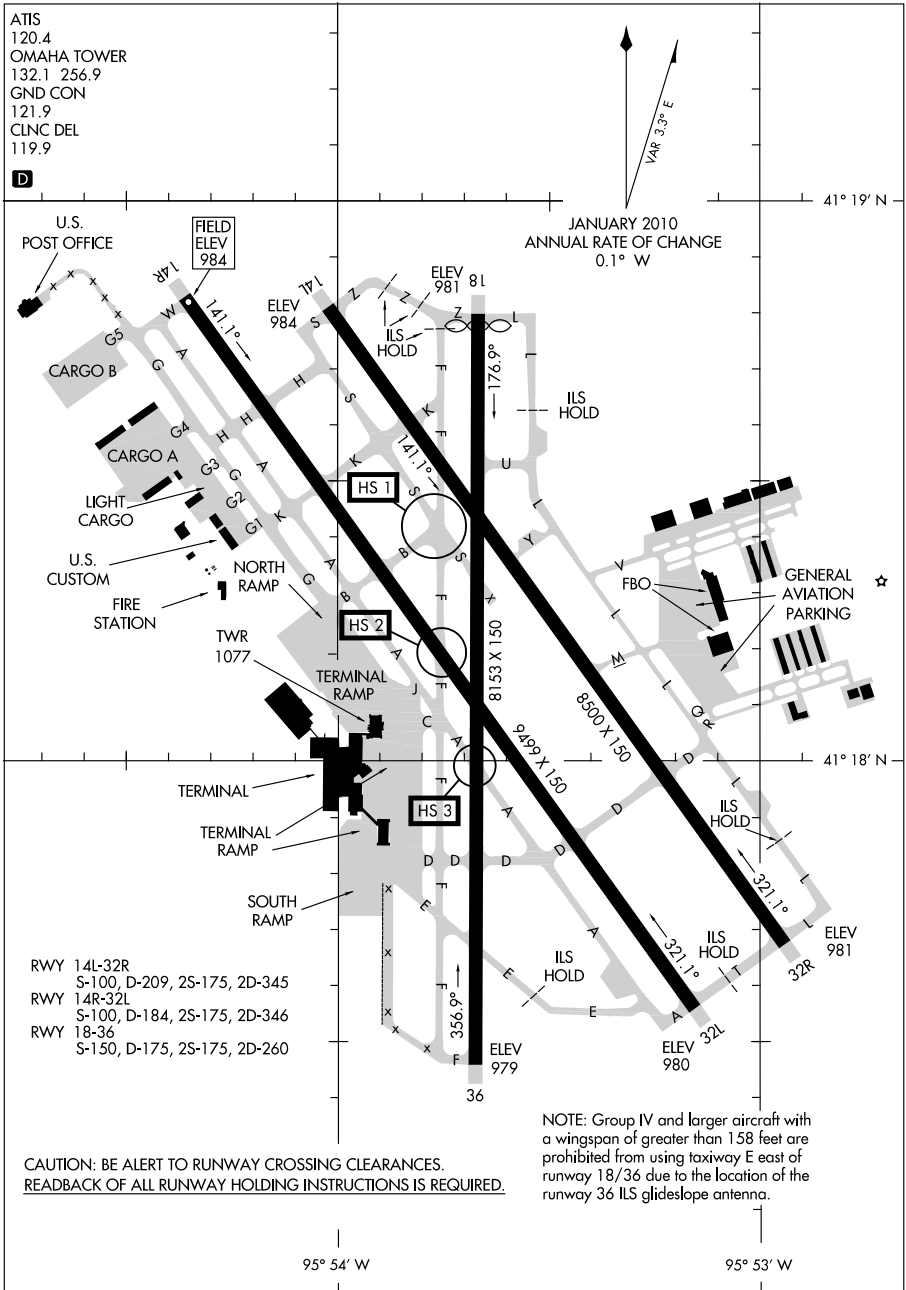

AIRPORT DIAGRAM

10266

OMAHA, NEBRASKA

OMAHA/EPPLEY AIRFIELD (OMA)


NC. 23 SEP 2010 to 18 NOV 2010

AIRPORT DIAGRAM

ASOS
124.175
CTAF/UNICOM
123.0

AL-915 (FAA)

OTTUMWA RGNL (OTM)
OTTUMWA, IOWA

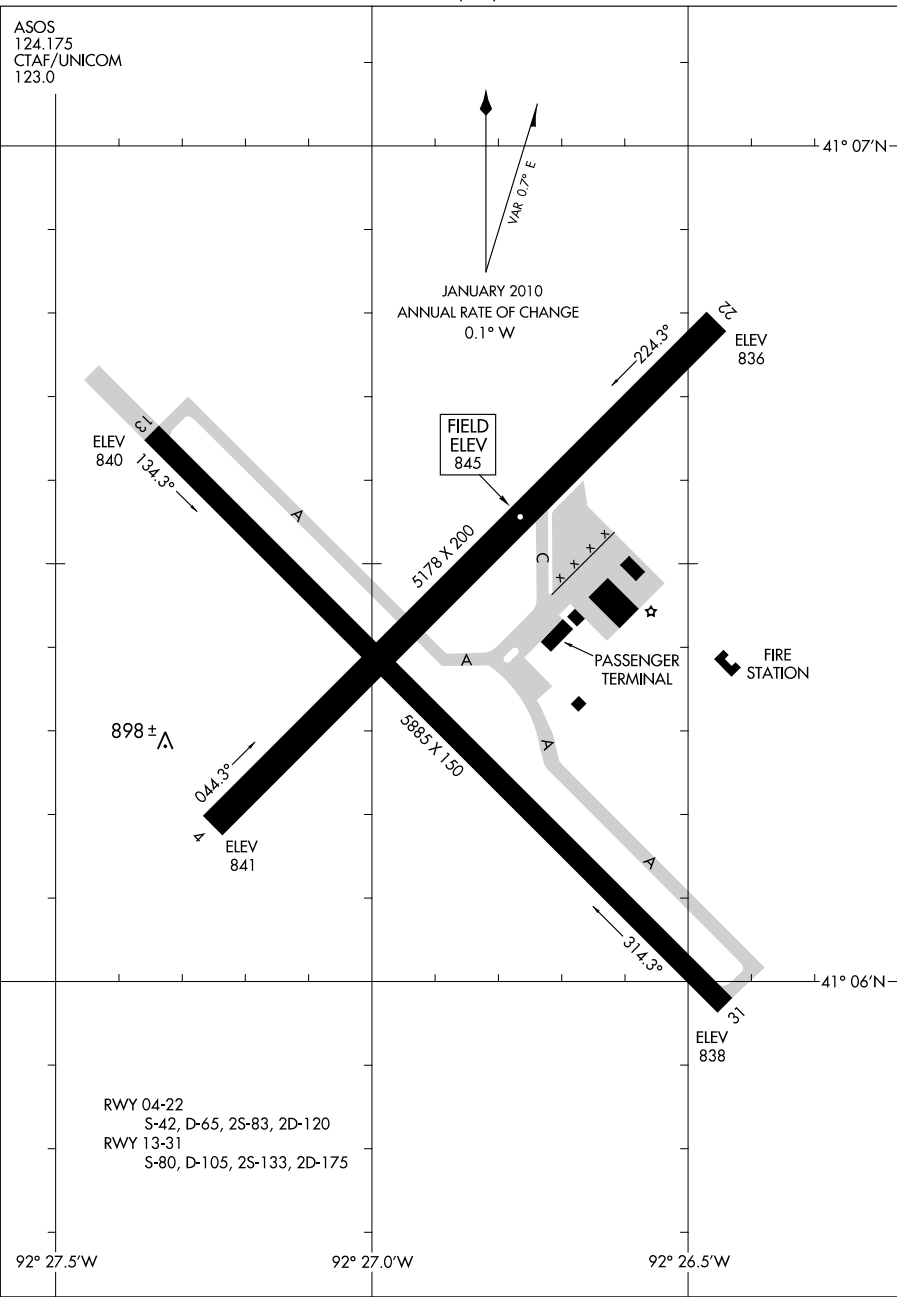


AIRPORT DIAGRAM

OTTUMWA, IOWA
OTTUMWA RGNL (OTM)

10210

AIRPORT DIAGRAM

RAPID CITY RGNL (R.A.P.)
RAPID CITY, SOUTH DAKOTA

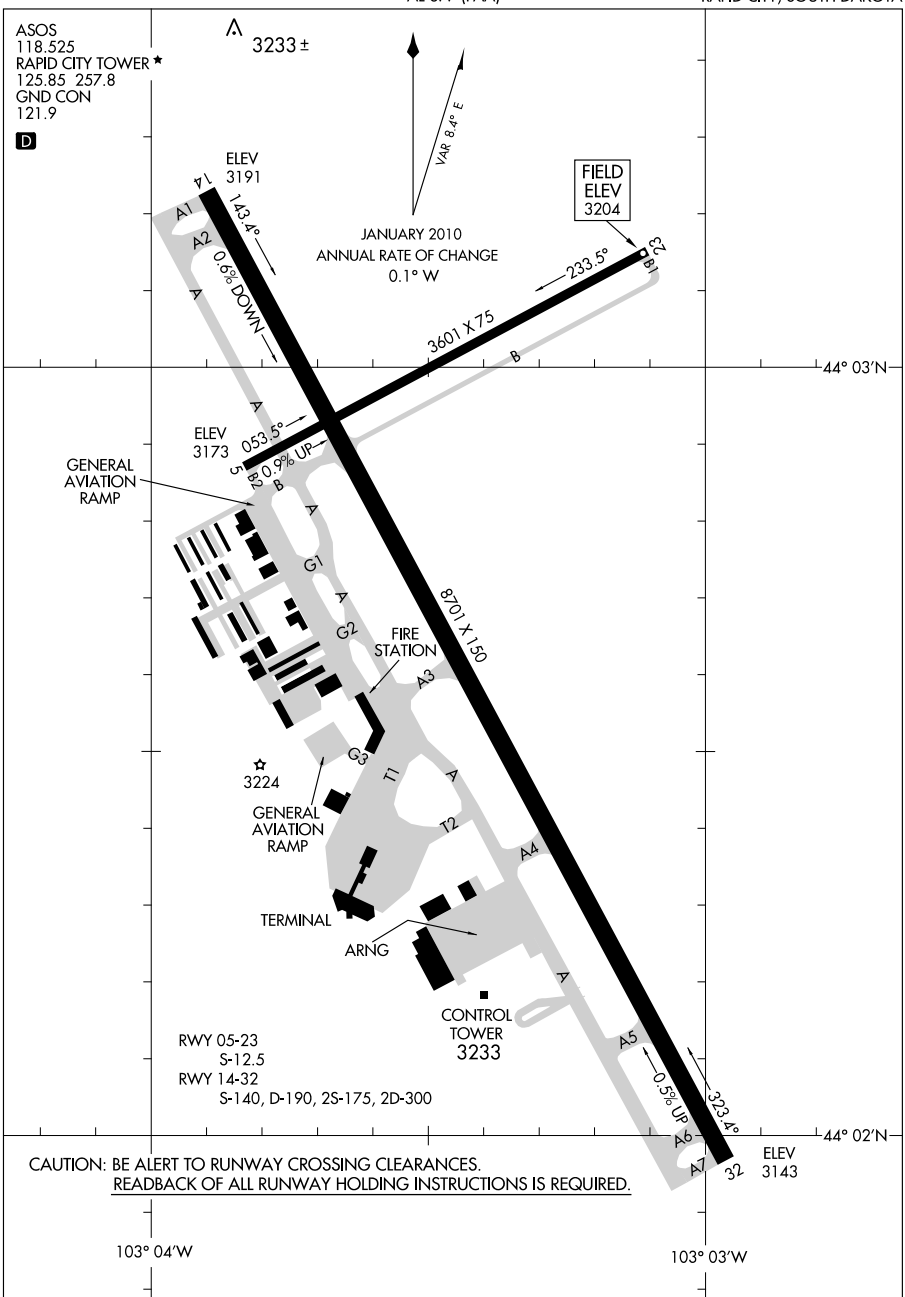

AIRPORT DIAGRAM


RAPID CITY, SOUTH DAKOTA
RAPID CITY RGNL (R.A.P.)

10210

AIRPORT DIAGRAM

AL-5041 (FAA)

ROCHESTER INTL (RST)
ROCHESTER, MINNESOTA

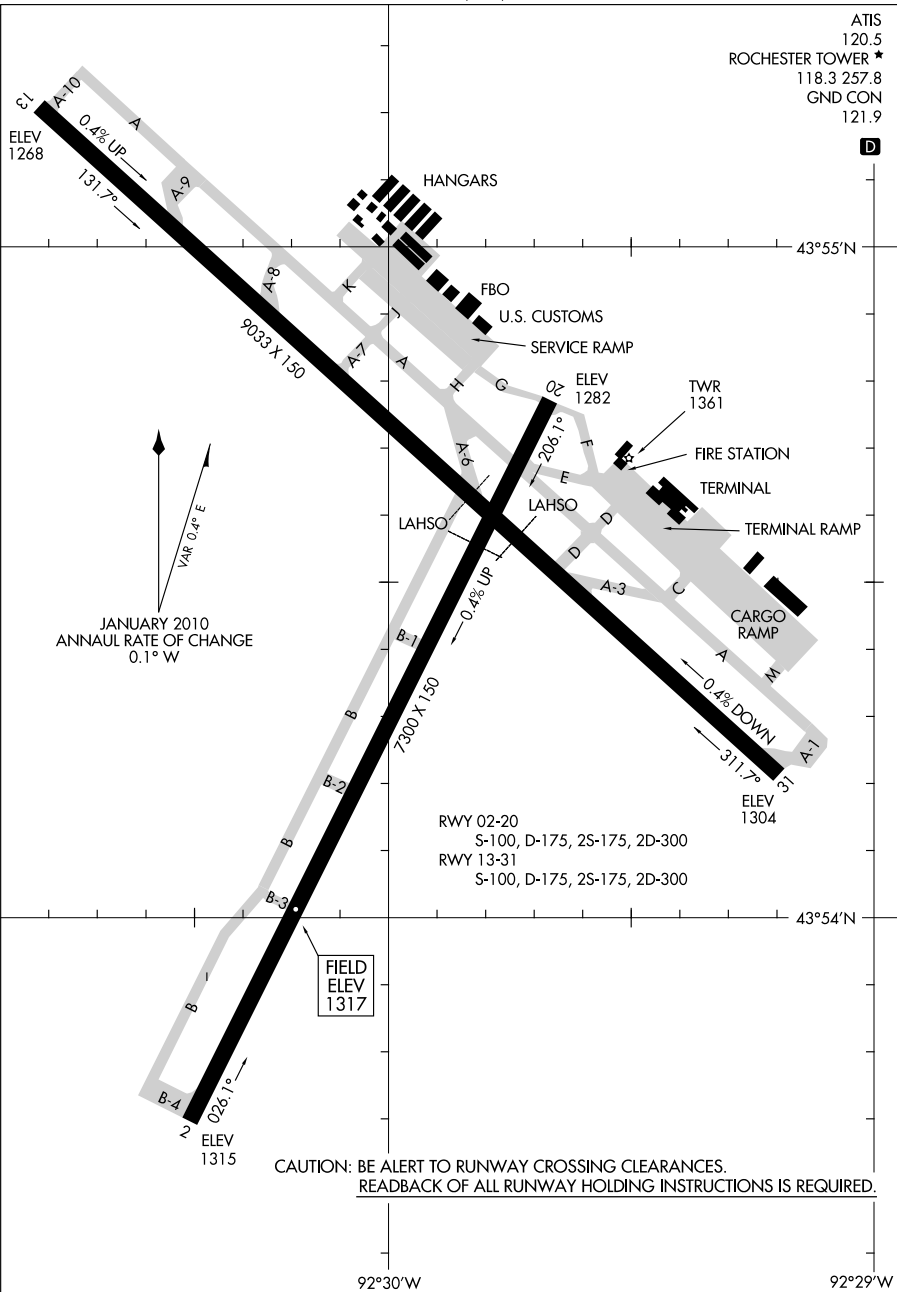

AIRPORT DIAGRAM


ROCHESTER, MINNESOTA
ROCHESTER INTL (RST)

10210

AIRPORT DIAGRAM

AL-5799 (FAA)

ST. CLOUD RGNL (STC)
ST. CLOUD, MINNESOTA

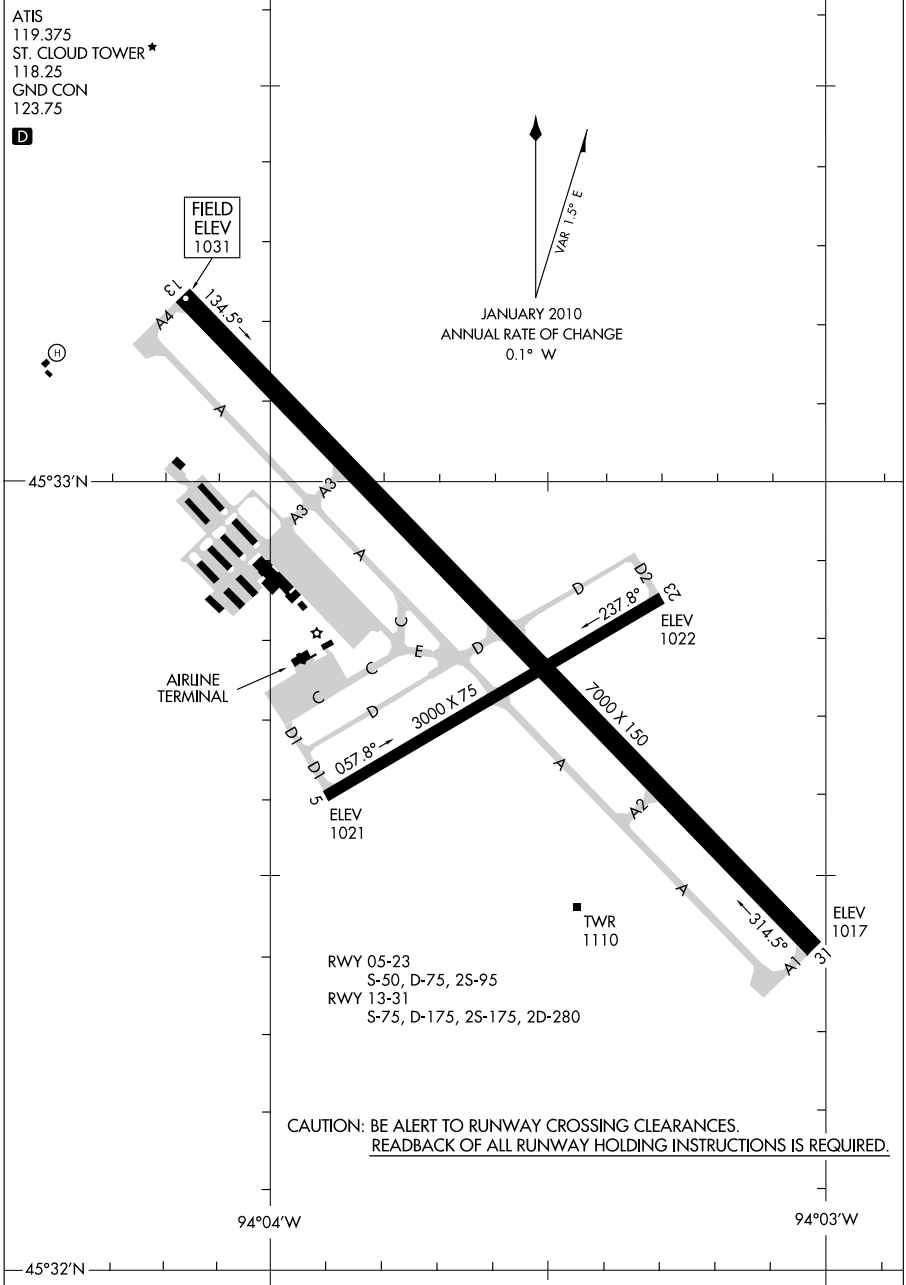

AIRPORT DIAGRAM


10210

ST. CLOUD, MINNESOTA
ST. CLOUD RGNL (STC)

AIRPORT DIAGRAM

AL-359 (FAA)

ST. JOSEPH/ROSECRANS MEMORIAL (STJ)
ST. JOSEPH, MISSOURI

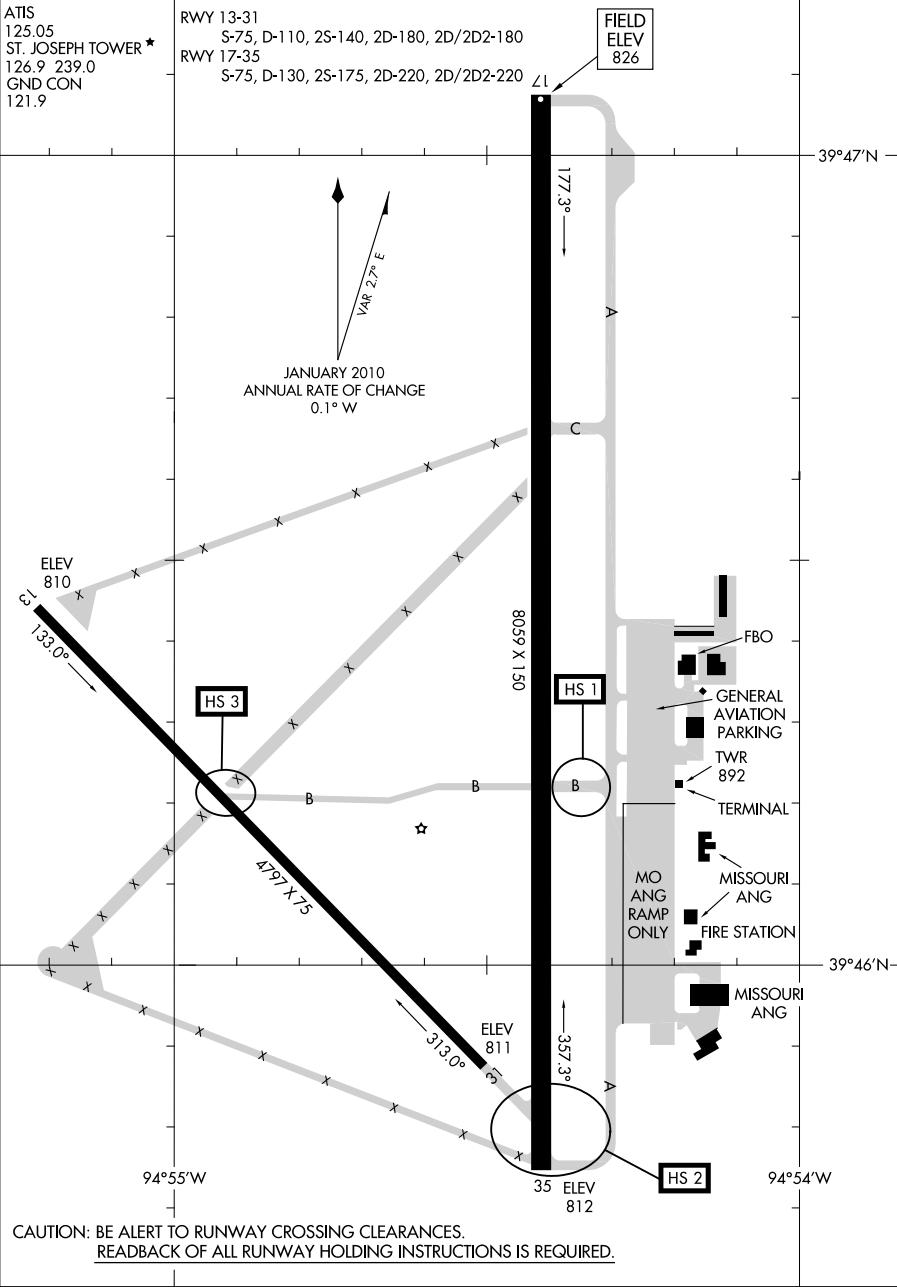

AIRPORT DIAGRAM


ST. JOSEPH, MISSOURI
ST. JOSEPH/ROSECRANS MEMORIAL (STJ)

10266

AIRPORT DIAGRAM

ST. LOUIS/LAMBERT-ST. LOUIS INTL (STL)

ST. LOUIS, MISSOURI

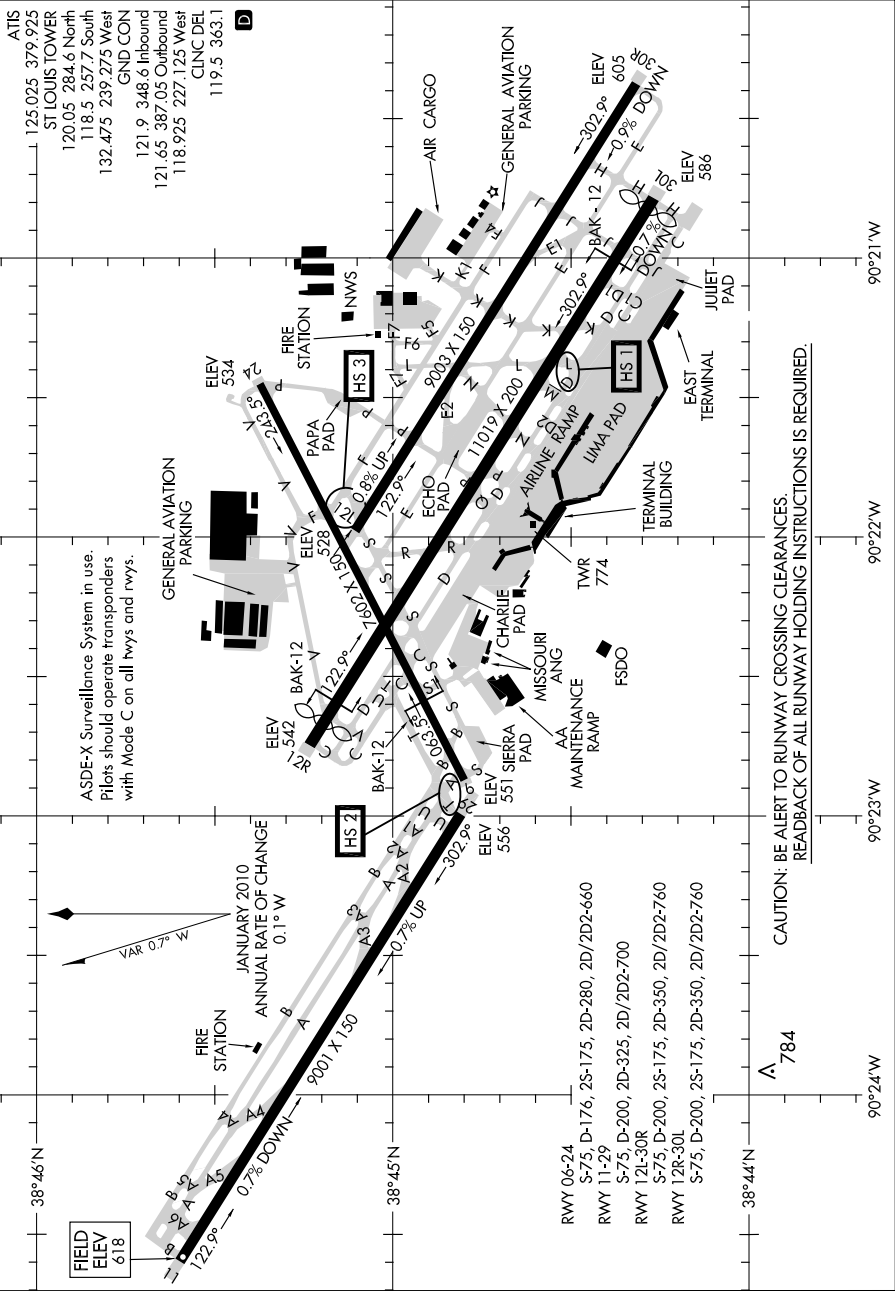

AIRPORT DIAGRAM

ST. LOUIS, MISSOURI

ST. LOUIS/LAMBERT-ST. LOUIS INTL (STL)


10266

10266

AIRPORT DIAGRAM

AL-5400 (FAA)

ST. LOUIS/ SPIRIT OF ST. LOUIS (SUS)
ST. LOUIS, MISSOURI

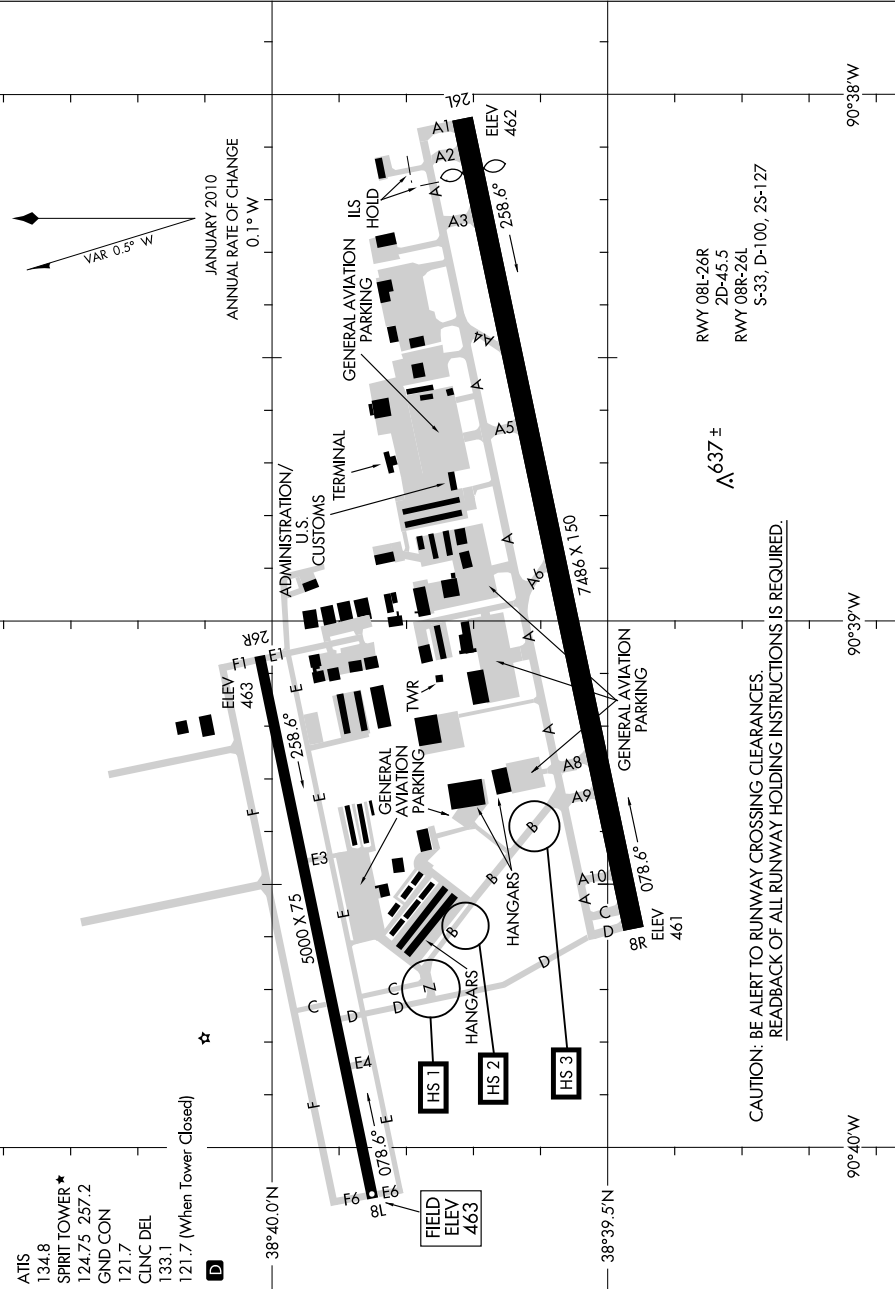


AIRPORT DIAGRAM

10266

ST. LOUIS, MISSOURI
ST. LOUIS/ SPIRIT OF ST. LOUIS (SUS)

10210
AIRPORT DIAGRAM

ST. PAUL DOWNTOWN HOLMAN FIELD (STP)
AL-263 (FAA) ST. PAUL, MINNESOTA

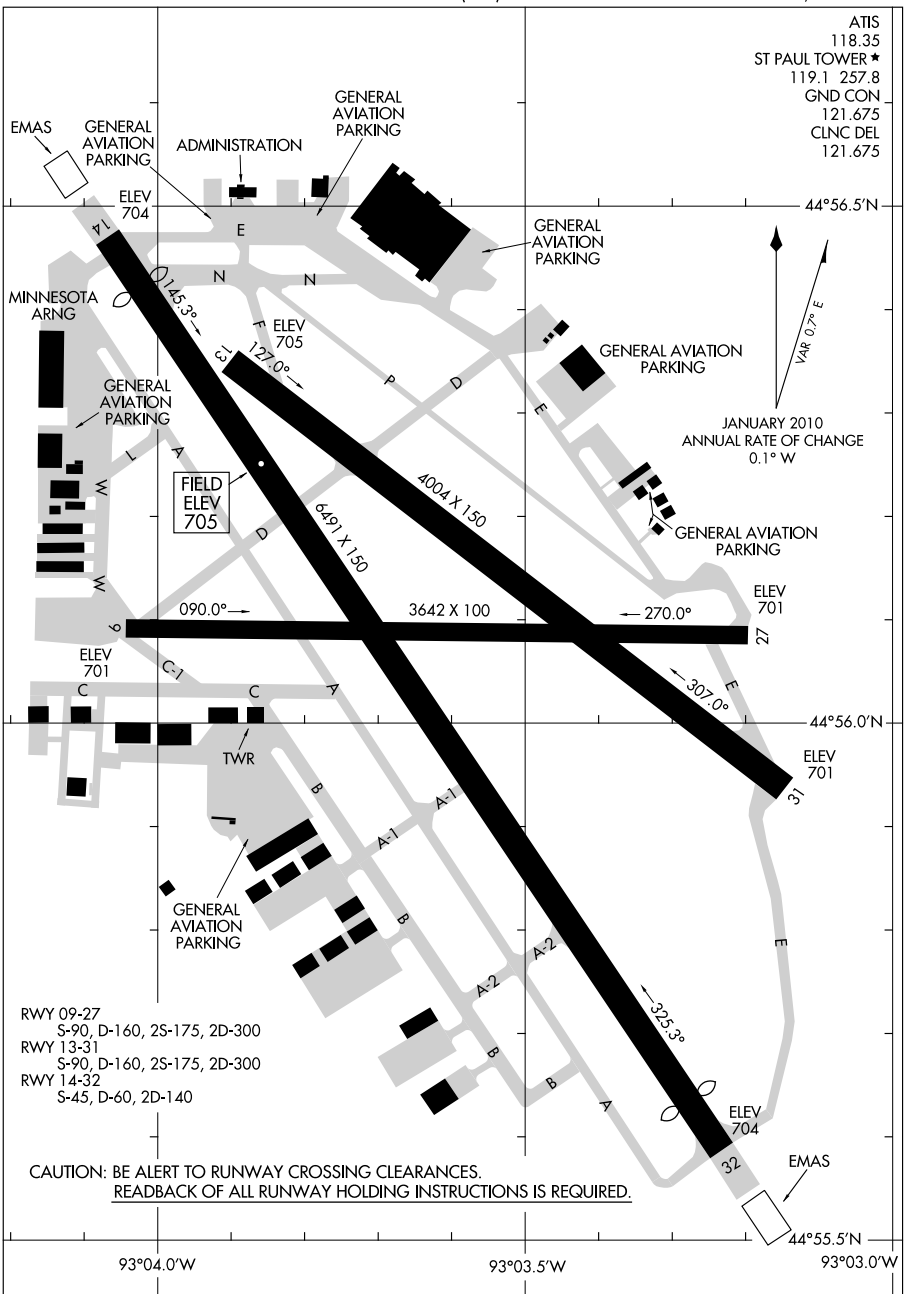


10210
AIRPORT DIAGRAM

ST. PAUL, MINNESOTA
ST. PAUL DOWNTOWN HOLMAN FIELD (STP)

NC. 23 SEP 2010 to 18 NOV 2010

10266


AIRPORT DIAGRAM

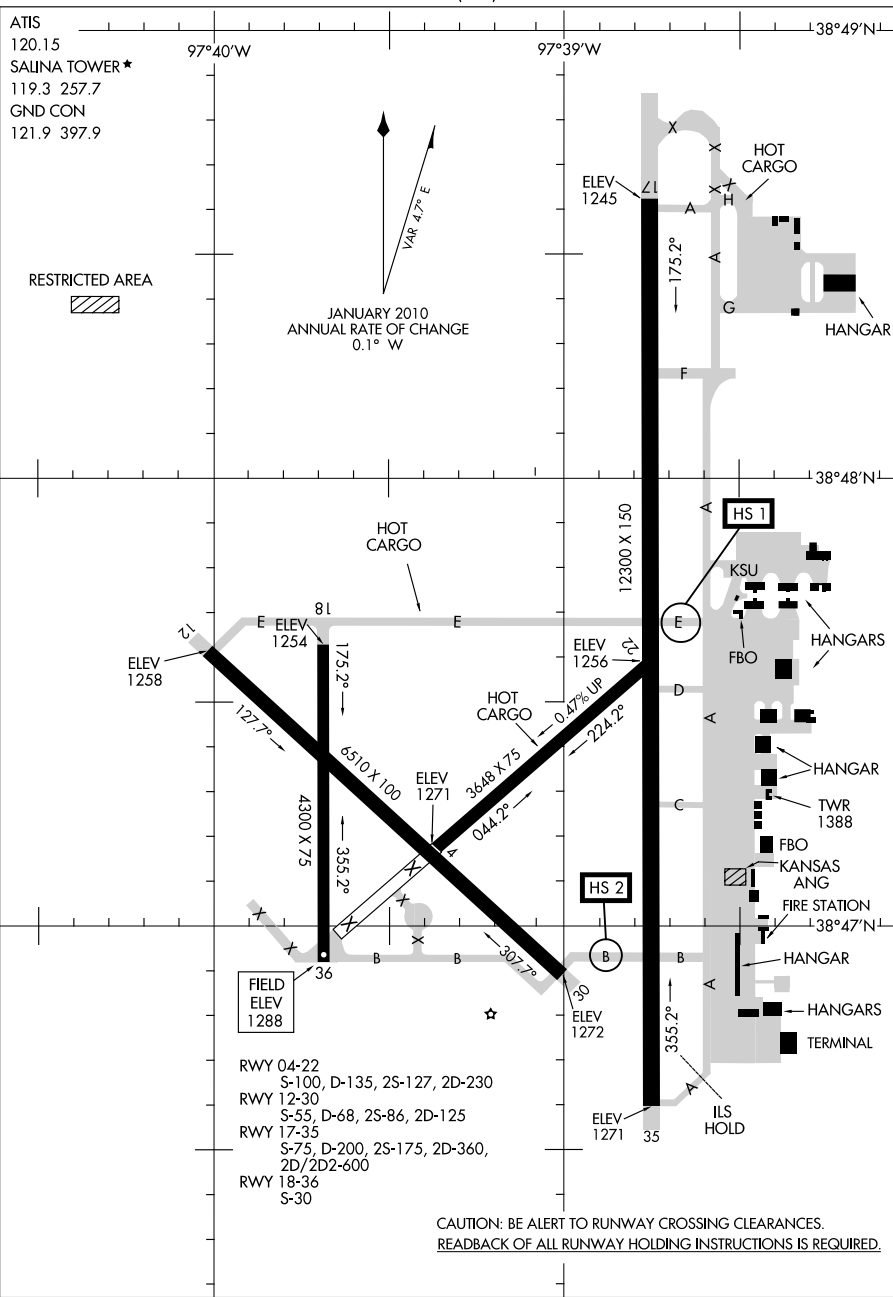

10210

AIRPORT DIAGRAM

WESTERN NEBRASKA RGNL/WILLIAM B. HEILIG FIELD (B'F'F)
SCOTTSBLUFF/ AL-383 (FAA) SCOTTSBLUFF, NEBRASKA

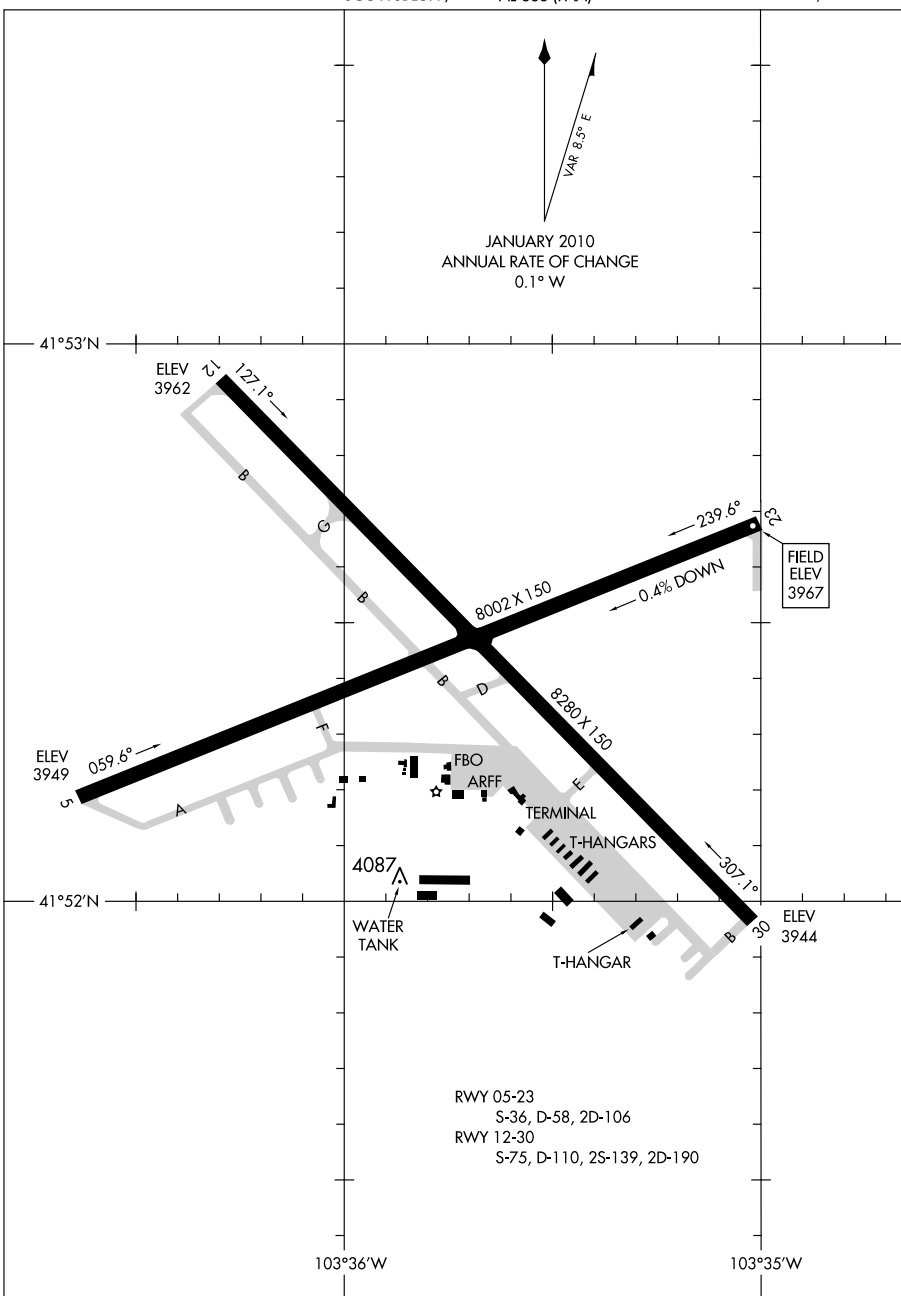

AIRPORT DIAGRAM

10210

SCOTTSBLUFF/
WESTERN NEBRASKA RGNL/WILLIAM B. HEILIG FIELD (B'F'F)

SCOTTSBLUFF, NEBRASKA


10266

AIRPORT DIAGRAM

SIoux GATeway/Colonel Bud Day Field (SUx)

AL-395 (FAA)

SIoux City, Iowa

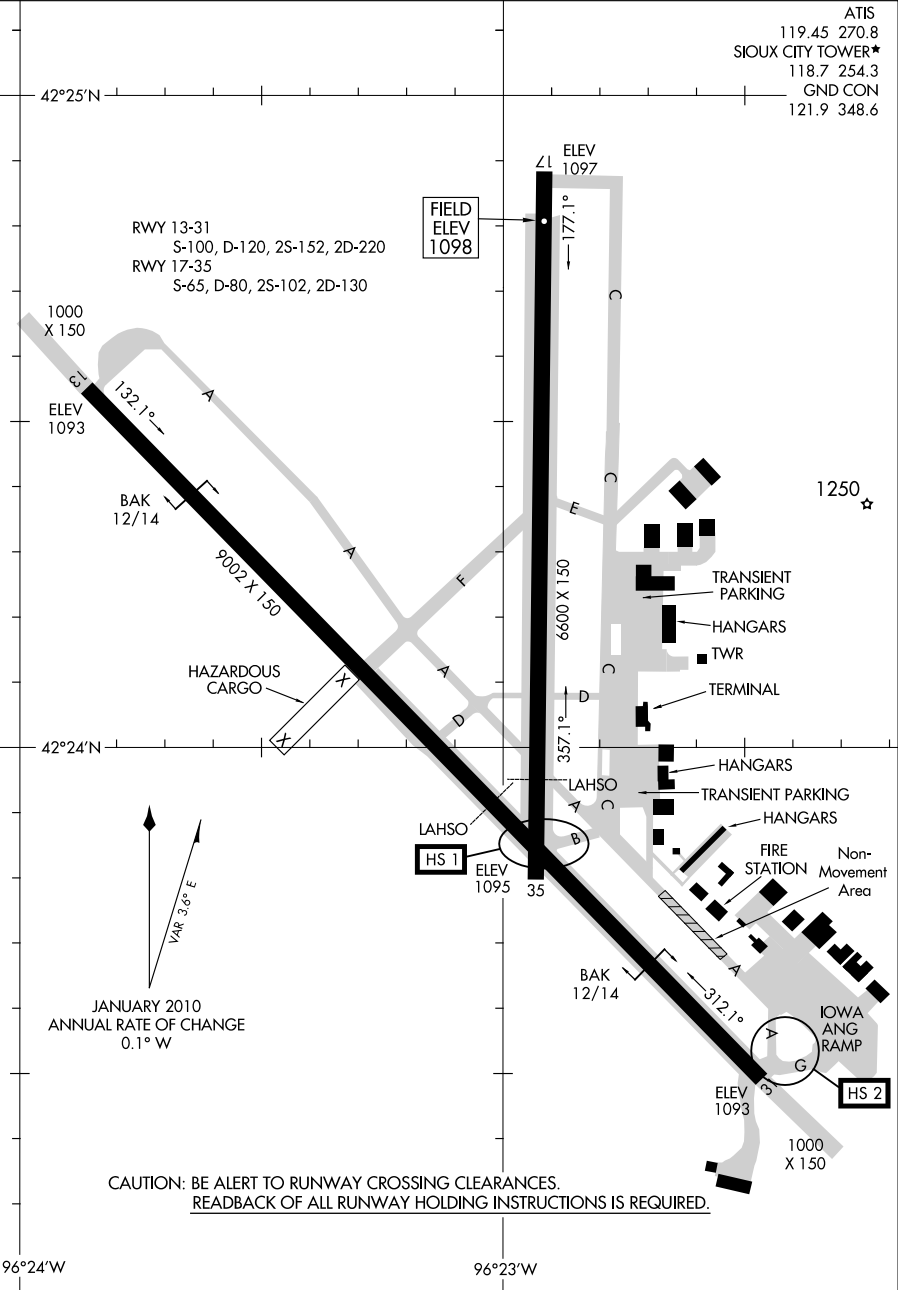

AIRPORT DIAGRAM

10266


SIoux GATeway/Colonel Bud Day Field (SUx)

SIoux City, Iowa

AIRPORT DIAGRAM

SIOUX FALLS/JOE FOSS FIELD (FSD)
SIOUX FALLS, SOUTH DAKOTA

AL-396 (FAA)

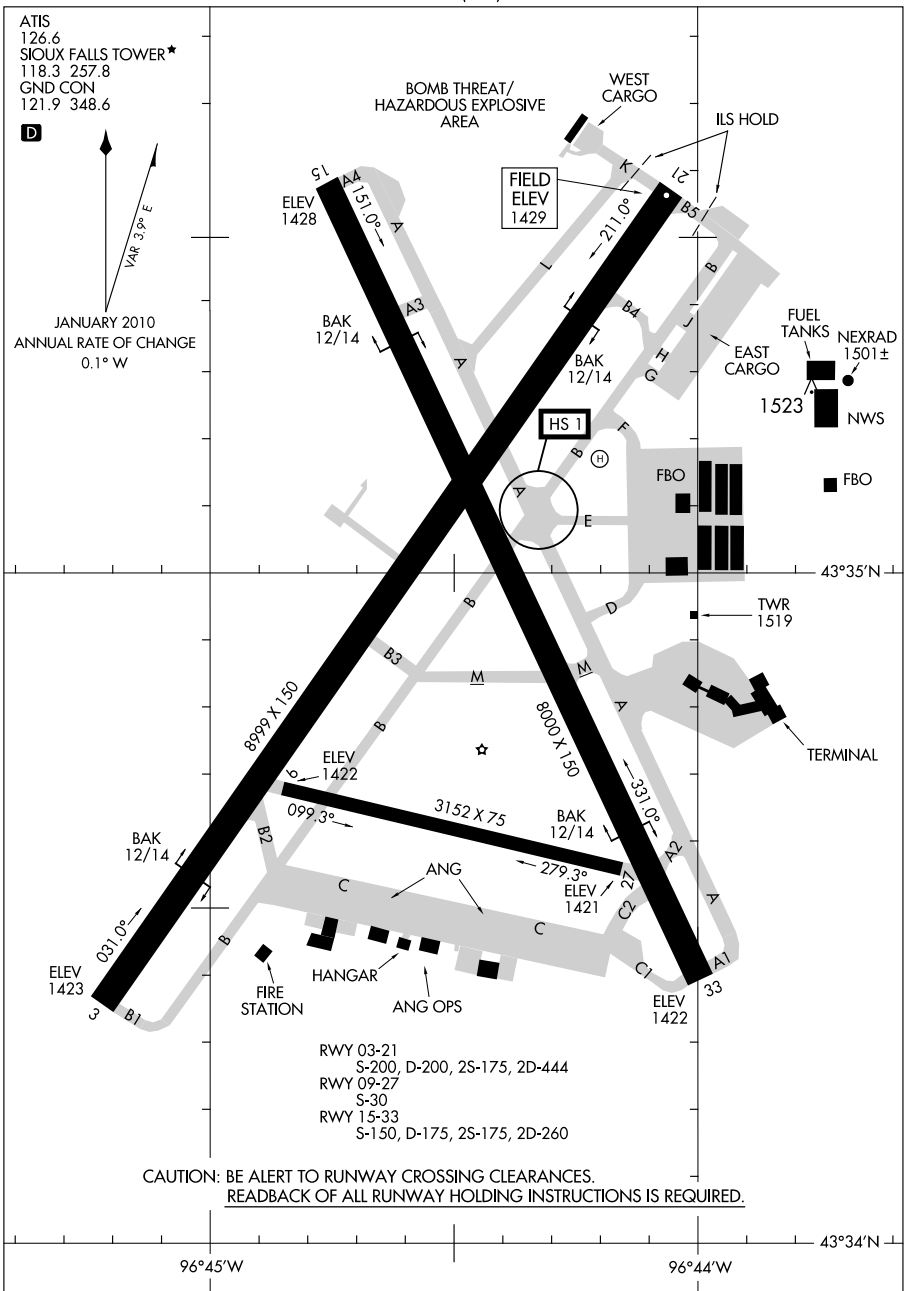

AIRPORT DIAGRAM

SIOUX FALLS, SOUTH DAKOTA
SIOUX FALLS/JOE FOSS FIELD (FSD)

10266

NC, 23 SEP 2010 to 18 NOV 2010


10266

AIRPORT DIAGRAM

AL-604 (FAA)

SPRINGFIELD-BRANSON NATIONAL (SGF¹)

SPRINGFIELD, MISSOURI

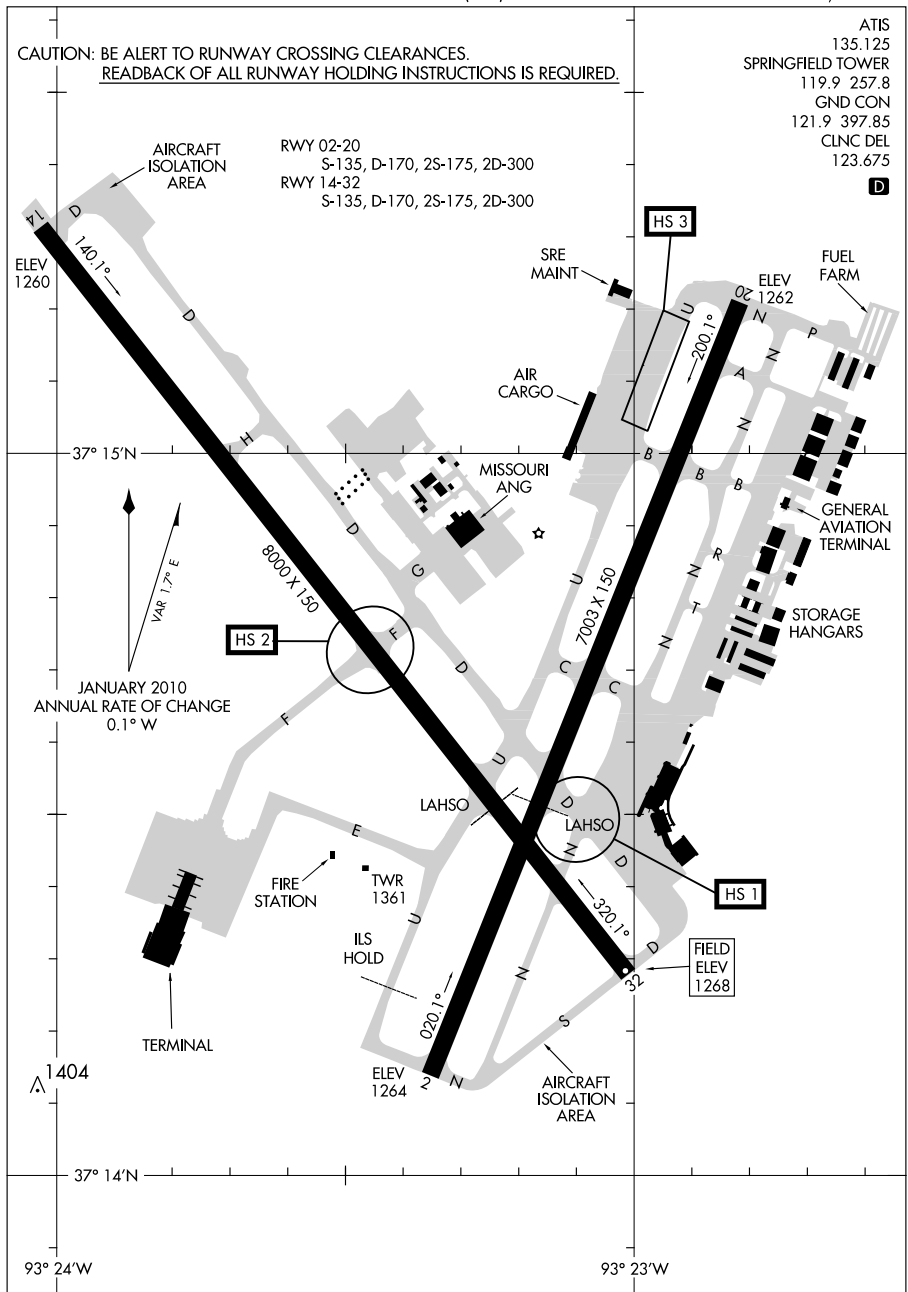

AIRPORT DIAGRAM

10266

SPRINGFIELD, MISSOURI

SPRINGFIELD-BRANSON NATIONAL (SGF¹)


10266

AIRPORT DIAGRAM

AL-424 (FAA)

TOPEKA/FORBES FIELD (F/OE)
TOPEKA, KANSAS

ATIS
128.25
FORBES TOWER ★
120.8 340.2
GND CON
121.7 275.8

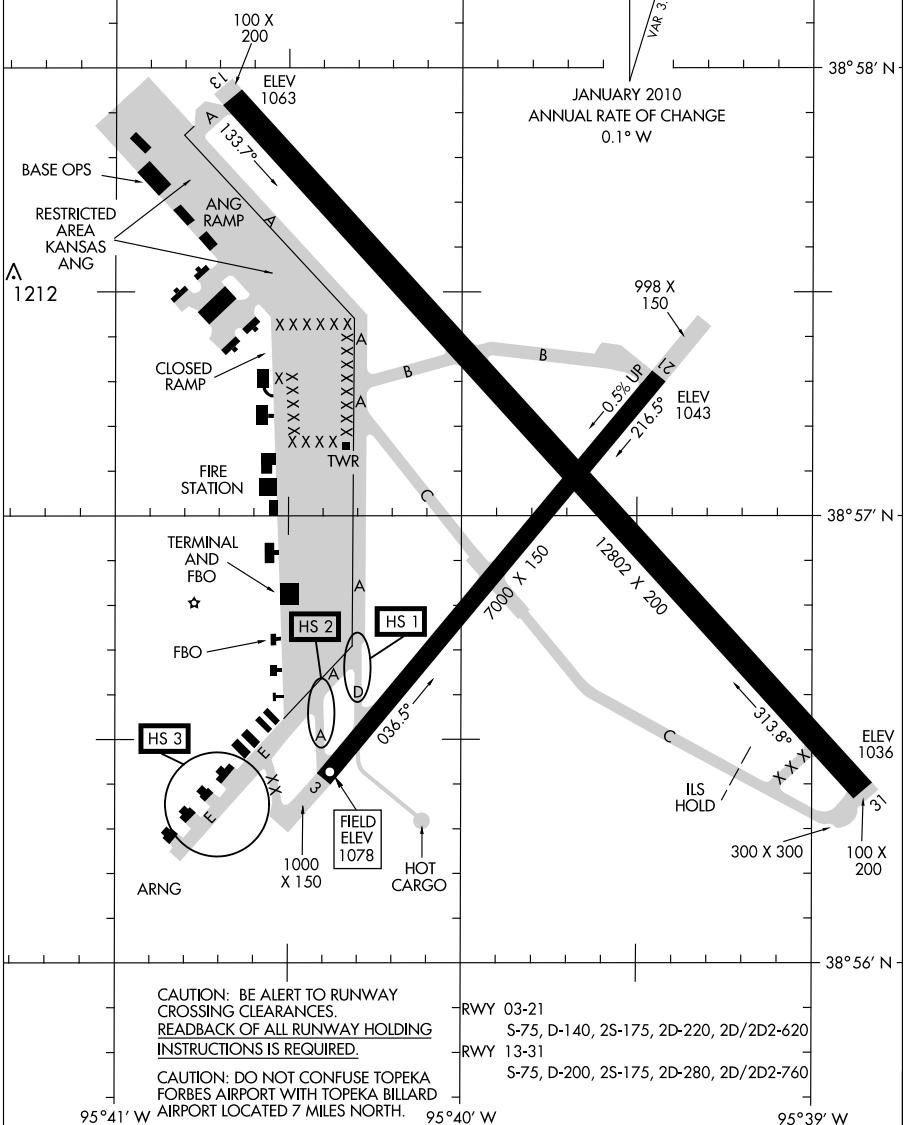

AIRPORT DIAGRAM

10266


TOPEKA, KANSAS
TOPEKA/FORBES FIELD (F/OE)

NC. 23 SEP 2010 to 18 NOV 2010

AIRPORT DIAGRAM

AL-620 (FAA)

TOPEKA/PHILIP BILLARD MUNI (TOP)
TOPEKA, KANSAS

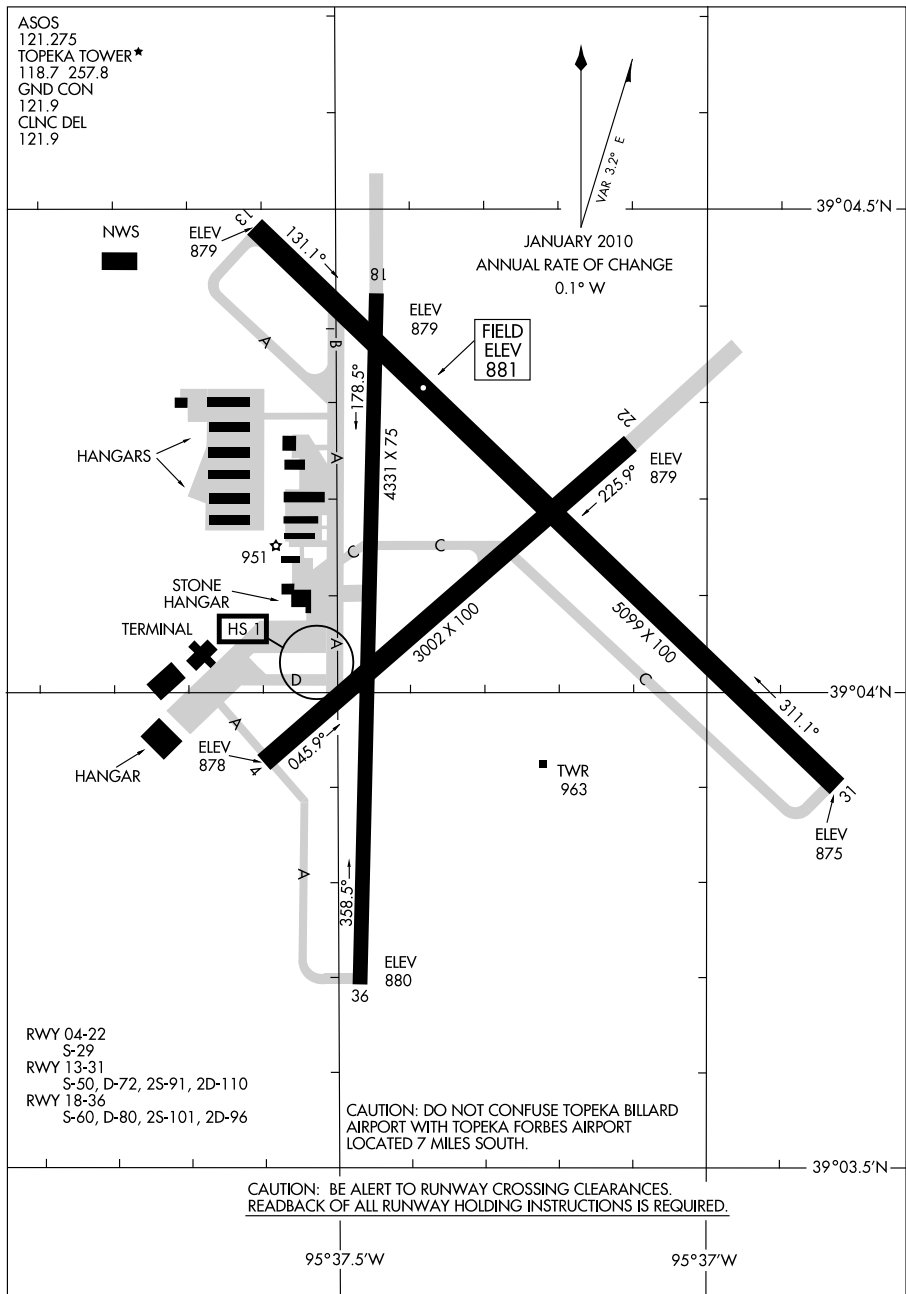

AIRPORT DIAGRAM

TOPEKA, KANSAS
TOPEKA/PHILIP BILLARD MUNI (TOP)

AIRPORT DIAGRAM

WATERLOO RGNL (ALO)
WATERLOO, IOWA

WATERLOO, IOWA
WATERLOO RGNL (ALO)

10266

NC, 23 SEP 2010 to 18 NOV 2010


08325

WHITEMAN AFB (KSZL)

AIRPORT DIAGRAM

AFD-496 [USAF]


KNOB NOSTER, MISSOURI

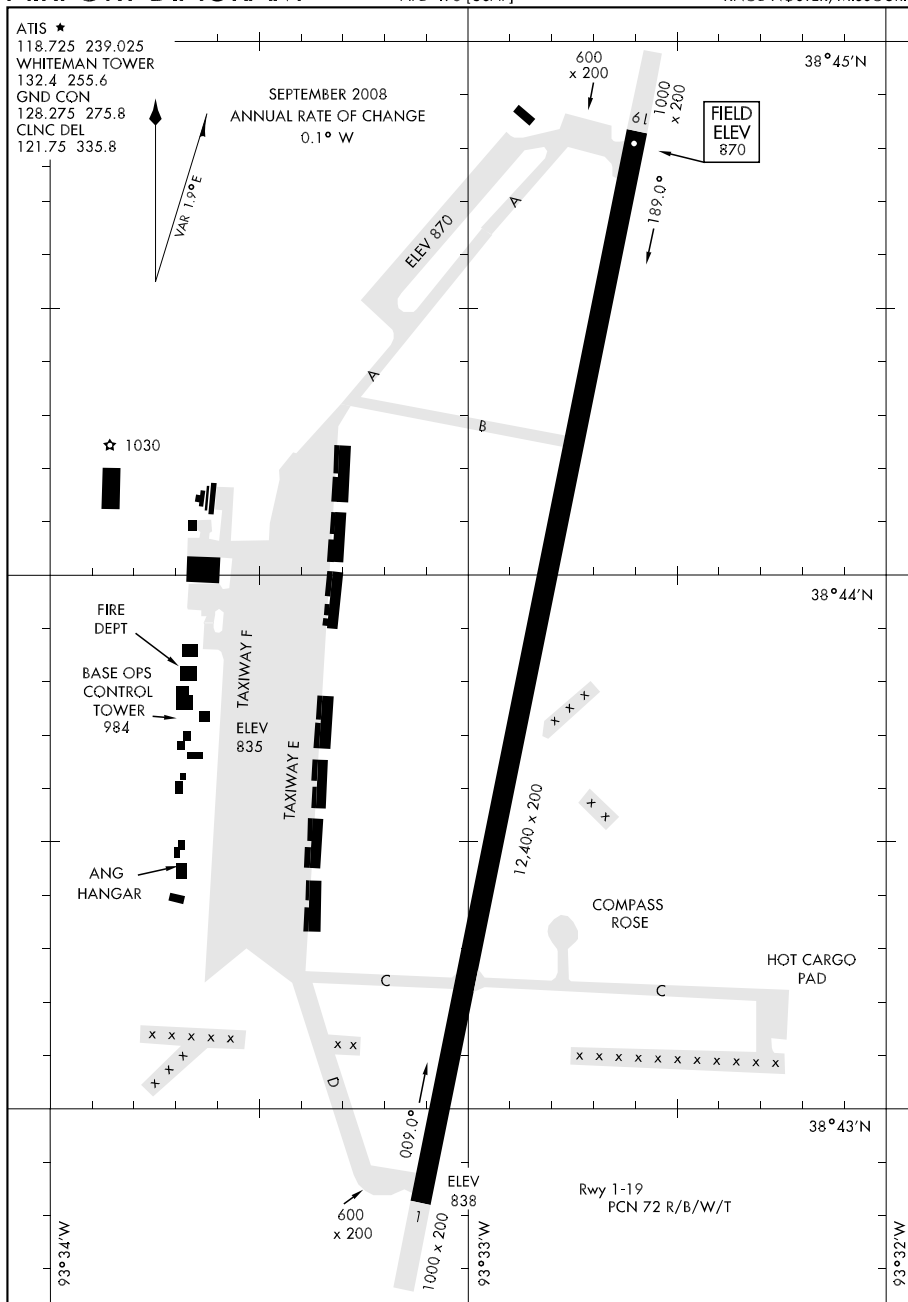

AIRPORT DIAGRAM

KNOB NOSTER, MISSOURI
 WHITEMAN AFB (KSZL)

NATIONAL WEATHER SERVICE (NWS) UPPER AIR OBSERVING STATIONS (UAOS) AND WEATHER RADAR NETWORK

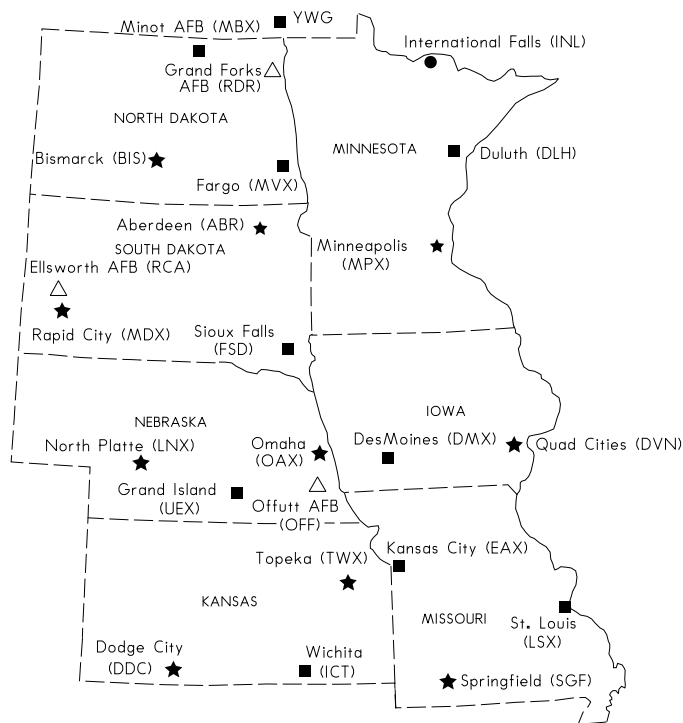


LEGEND

- △ AVIATION WEATHER SERVICE (MILITARY)
- ▲ AIR TRAFFIC CONTROL RADAR
- ★ UPPER AIR OBSERVING STATION/RADAR
- RADAR ONLY
- UAOS-BALLOON RELEASES AROUND 1100 UTC AND 2300 UTC DAILY
- OTHER NWS UPPER AIR STATIONS-BALLOON RELEASE TIMES ARE FLEXIBLE BUT GENERALLY AROUND SUNRISE AND/OR EARLY AFTERNOON

NOTE: FOR RELEASES LATER THAN 1130 UTC AND 2300 UTC, AND FOR SPECIAL RELEASES AT OTHER THAN THE SCHEDULED HOURS, AN AERONAUTICAL INFORMATION MESSAGE WILL BE FILED.

ENROUTE FLIGHT ADVISORY SERVICE (EFAS)

See Aeronautical Information Manual (AIM) for available services

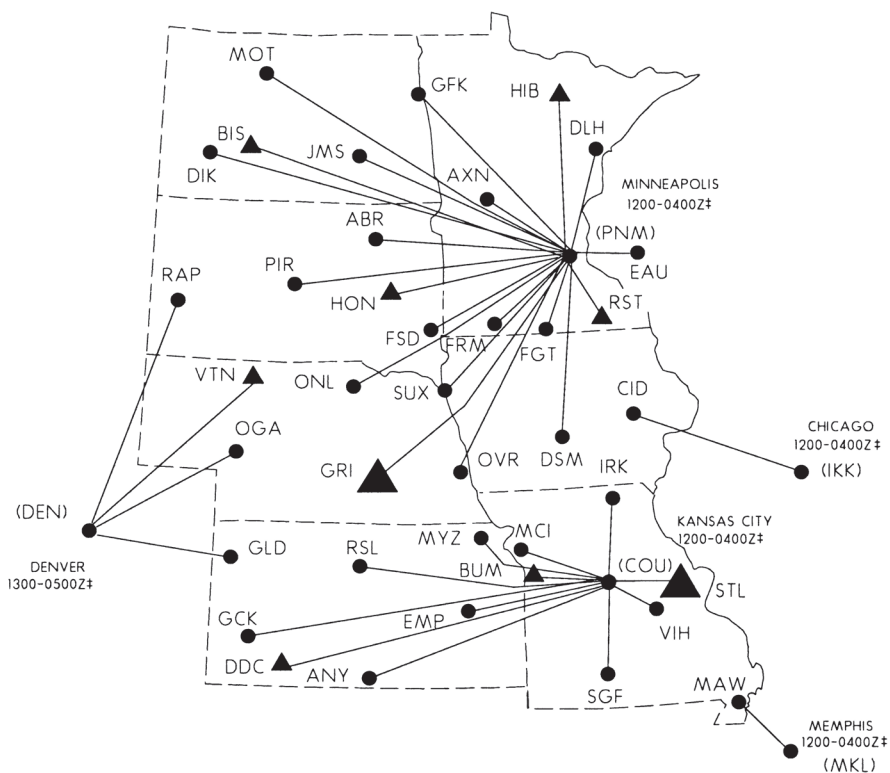

DENVER EFAS HIGH ALTITUDE FREQUENCY 124.675

KANSAS CITY EFAS HIGH ALTITUDE FREQUENCY 123.625

MINNEAPOLIS EFAS HIGH ALTITUDE FREQUENCY 135.675

- LOW ALTITUDE COMMUNICATIONS OUTLET (122.0)
- ▲ HIGH ALTITUDE COMMUNICATIONS OUTLET
- BOTH LOW AND HIGH ALTITUDE COMMUNICATIONS OUTLET